

## Programmable Controllers MELSEC-L series

**e-Factory**

### Little on size, Large on performance

The new L series has a small footprint and is loaded with features.

MELSEC *L* series

*Simple!*



# GLOBAL IMPACT OF MITSUBISHI ELECTRIC



Through Mitsubishi Electric's vision, "Changes for the Better" are possible for a brighter future.

## ***Changes for the Better***

We bring together the best minds to create the best technologies. At Mitsubishi Electric, we understand that technology is the driving force of change in our lives. By bringing greater comfort to daily life, maximizing the efficiency of businesses and keeping things running across society, we integrate technology and innovation to bring changes for the better.

Mitsubishi Electric is involved in many areas including the following

### **Energy and Electric Systems**

A wide range of power and electrical products from generators to large-scale displays.

### **Electronic Devices**

A wide portfolio of cutting-edge semiconductor devices for systems and products.

### **Home Appliance**

Dependable consumer products like air conditioners and home entertainment systems.

### **Information and Communication Systems**

Commercial and consumer-centric equipment, products and systems.

### **Industrial Automation Systems**

Maximizing productivity and efficiency with cutting-edge automation technology.

# Simple

## Convenience that fits in the palm of your hand

The L Series is a compact-class controller, part of the MELSEC products renowned for exceptional cost verses performance and strong reliability. It provides the performance, functions, and capabilities required for today's demanding applications in a small package.

MELSEC-L Series greatly expands the range of functionality traditionally associated with compact programmable controllers and through user-centric design, pushes the limits of ease of use.

# Flexible

## Ideally configured to satisfy the applications requirements

MELSEC L Series has been designed with three key concepts in mind.

### Reliability

Robust and trusted MELSEC product quality.

### Ease-of-use

Enabling engineers and programmers to do their job as efficiently as possible to reduce costs.

### Flexibility

L Series is a cost-efficient control system flexible to various applications, enabling an ideal system design.

### USB

### SD memory card slot\*3

Data Logging

Backup & Restore

### Ethernet\*3

Time setting function

Simple PLC communication function

Predefined protocol support function

### Display unit\*1

### Built-in I/O functions

Positioning

High-speed Counter

Pulse Catch

Interrupt Input

General Purpose I/O

### Built-in CC-Link connectivity\*2

# MELSEC *L* series

\*1: Option (sold separately). Does not support L02SCPU(-P).

\*2: Included with L26CPU-(P)BT

\*3: Included with L02CPU-(P), L06CPU-(P), L26CPU-(P), L26CPU-(P)BT



## L Series Built-in I/O Features

Every L Series CPU comes with 24 points of built-in I/O standard. These I/O points are capable of many functions usually reserved for separate modules. Save on system costs by using the built-in functions rather than relying exclusively on additional modules.

The built-in I/O\*1 comes in sink or source type format and may be chosen based on the application.

### L Series CPU Built-in I/O Functions


| Positioning<br>(Built-in control of 2 axes) | High-Speed Counter<br>(Two channels built-in)                                 | Pulse Catch  | Interrupt Input | General-purpose<br>Input/Output |
|---|---|--|-----------------|---------------------------------|
| Function                                    |   | Features   |                 |                                 |
| Positioning*2                               | Number of axes: Maximum 2 axes  | Maximum speed: 200K pulses/s<br>High-speed activation: 30 μs (Shortest activation time)<br>S-curve acceleration and deceleration are supported.  |                 |                                 |
| High-Speed Counter*2                        | Number of channels: Maximum 2 channels  | Maximum counting speed: 200K pulses/s<br>Open collector, Differential line driver input<br>High accuracy ON/OFF measurements with a resolution of 5 μs<br>High precision PWM control up to 200 kHz (High speed pulse output) |                 |                                 |
| Pulse Catch                                 | Number of input points: 16 points   | Minimum input response time: 10 μs<br>Pulse signals whose ON time is shorter than the scan time can be detected.   |                 |                                 |
| Interrupt Input                             | Number of interrupt points: 16 points   | Built-in CPU provides high-speed processing.<br>All input points support interrupt inputs.   |                 |                                 |
| General-purpose Input                       | Number of high-speed inputs: 6 points<br>Number of standard inputs: 10 points | Minimum input response time of high-speed input: 10 μs<br>Minimum input response time of standard input: 100 μs  |                 |                                 |
| General-purpose Output                      | Number of output points: 8 points   | Output response time: 1 μs or less   |                 |                                 |

\*1: The L02SCPU, L02CPU, L06CPU, L26CPU and L26CPU-BT are sink type, and the L02SCPU-P, L02CPU-P, L06CPU-P, L26CPU-P and L26CPU-PBT are source type.


\*2: Points used by the positioning and high speed counting functions are fixed (as in A phase, B phase, near-point dog).  
Custom points for these functions may not be assigned.

## Easy setup of built-in I/O functions

Configuring built-in I/O functions can be done easily by setting parameters using the programming tool.

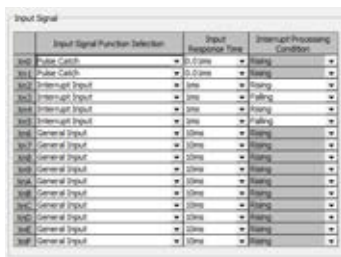

**Built-in I/O function example parameter settings**  
Pulse Catch: 0.01 ms (response time)  
Interrupt Input: 1 ms (response time)

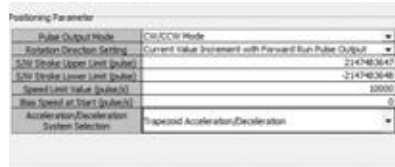

**Positioning function example parameter settings**  
Pulse Output Mode: CW/CCW mode  
Rotation Direction Setting:  
Current Value Increment with Forward Run Pulse Output



**High-speed counter function example parameter settings**  
Pulse Input Mode: 1-Phase Multiple of 1  
Counting Speed Setting: 100 kpps

## Built-in CPU positioning control function


### Positioning function

The built-in positioning function has a start time of just 30 μs with a maximum high speed output of 200K pulses per second.

Furthermore, it supports S-curve acceleration and deceleration for applications that require minimal machine vibration.

### High-speed counter function

Two channels support the high speed counting function. The differential line driver inputs support counting speeds up to 200K pulses per second.

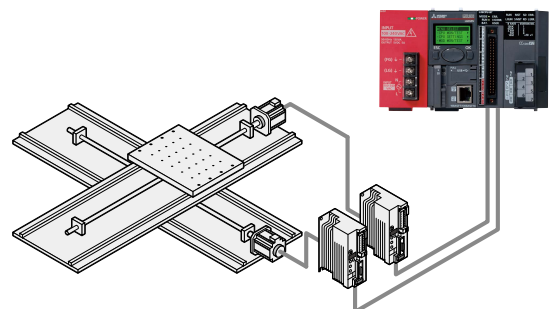




## Make highly accurate measurements with a resolution of 5 μs

High-Speed Counter

Using pulse measurement mode, where the input signal ON/OFF time is 200 μs or greater, highly accurate measurements in units of 5 μs or greater are possible.

For example it is possible to calculate length by knowing the "work object passing speed" and measuring the ON time of the sensor.

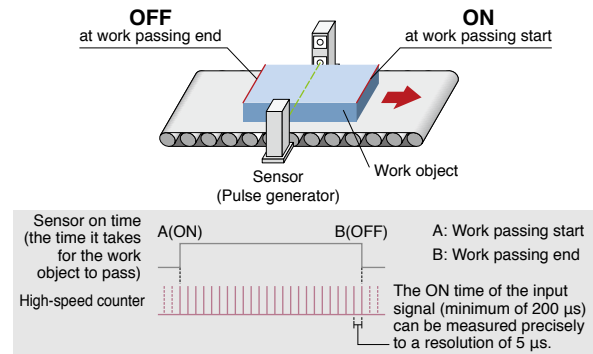


## High precision PWM control up to 200 kHz

High-Speed Counter


Using the pulse width modulation control function of the high speed outputs, cycle times as fast as 5 μs can be created. Simply input the ON time and cycle time to drive a wide range of devices from lighting dimmer control, motors, and heaters to precision inspection equipment requiring high resolution performance.

| Setting item            | Setting range                  | Description                        |
|-------------------------|--------------------------------|------------------------------------|
| PWM output ON time*1    | 0 or 10... 10000000*1 (0.1 μs) | Set the ON time of output pulse    |
| PWM output cycle time*1 | 50... 10000000*1 (0.1 μs)      | Set the cycle time of output pulse |

\*1: The PWM output ON time must be ≤ than PWM output cycle time.



### ■ Lighting dimmer control using PWM output

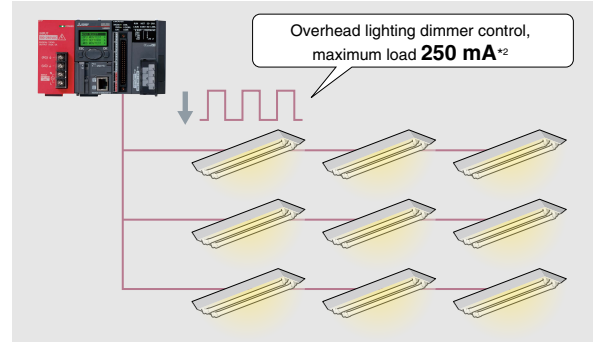


\*2: In cases where the first six digits of the serial number are "120722" or later. Previous serial numbers of the CPU module are applied to 100 mA.

## Guaranteed input pulse detection

Pulse Catch

Typical programmable controller input devices are unable to detect pulse signals whose ON time is shorter than the scan time or do not occur during I/O refresh periods. The pulse catch function allows these signals to be reliably detected and passed to the sequence program. This function is different from the interrupt input function in that it does not require any special programming. Pulse catch inputs may be used in programs exactly the same as traditional input (X) signals.

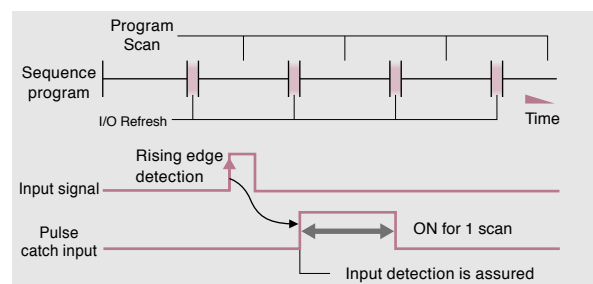


## CPU with built-in CC-Link network connectivity

L26CPU-(P)BT


L Series CC-Link ready CPUs are compatible with the latest generation of CC-Link devices and support connections with over 1,000 different product types. Without adding a module, these CPUs can perform high-speed communication with a maximum of 128 words\*3 between a master station and a local station. CC-Link is the dominate FA network standard in Asia and continues to gain support worldwide.

CC-Link

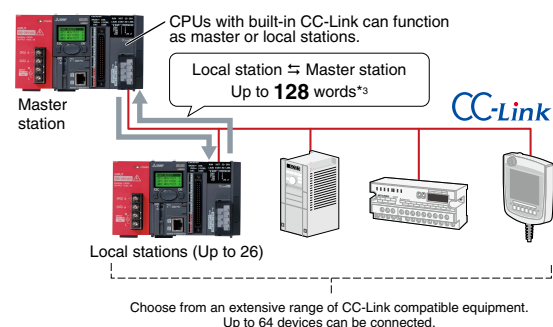

\*3: When the number of occupied stations is 4 and the extended cyclic setting is octuple in the Remote net Ver.2 mode.

## L Series Features

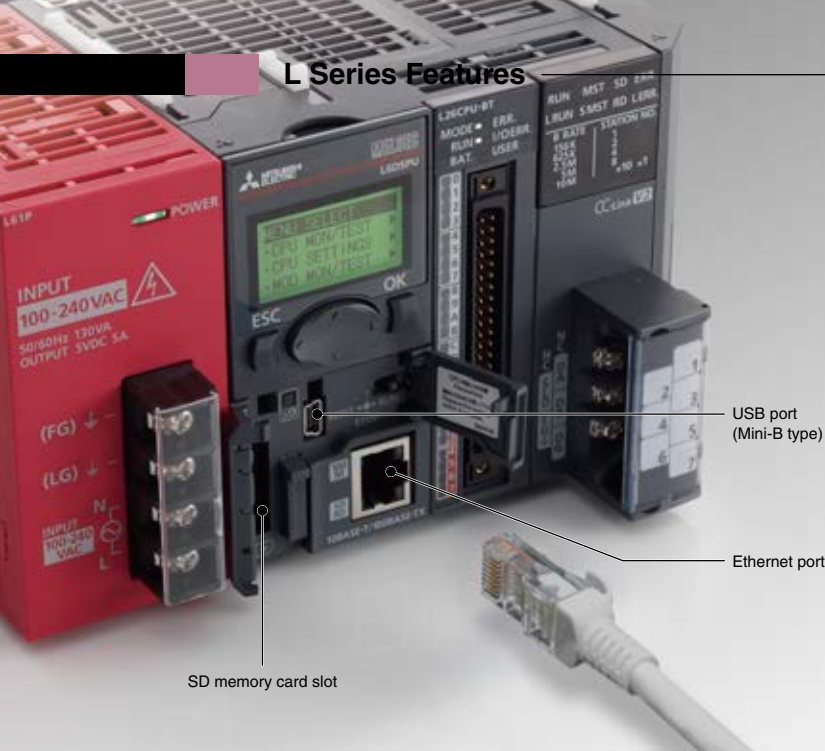

## Convenient communication and storage options come as standard


Program, configure, and perform diagnostics on L Series systems using either the USB 2.0 or Ethernet connections. The SD Memory Card slot has many uses including the easy backup and restore of programs and parameters.



L02CPU(-P) L06CPU(-P) L26CPU(-P) L26CPU(-P)BT

## USB and Ethernet connections standard


Use the USB 2.0 interface or Ethernet to connect directly at the installation site. The Ethernet interface supports direct connection with either a cross or straight LAN cable and does not require any configuration of the programmable controller or PC to operate.

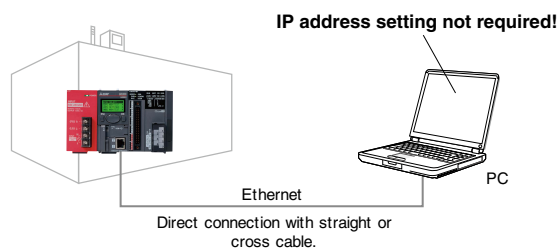

## Easy connection through hub

All CPUs connected to the same hub can be searched and displayed in a list.

By selecting the access target CPU from the list, it can be connected to even if the IP address is unknown.

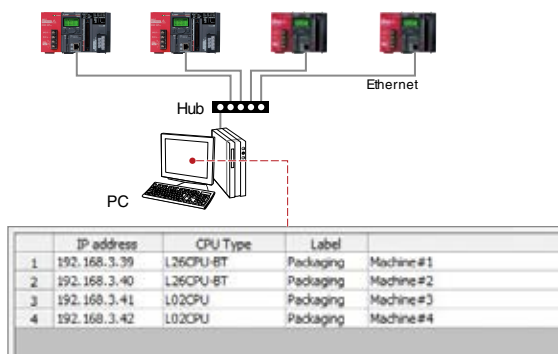


Use GX Works2 to retrieve a list of all CPUs connected to the network.

## Easily connect to BACnet™ and MODBUS®/TCP Improved function

Ethernet realizes a high-speed connection, such as communication with external devices.


By using the predefined protocol support function, various devices that require open network protocol support, such as BACnet™ and MODBUS®/TCP are supported.

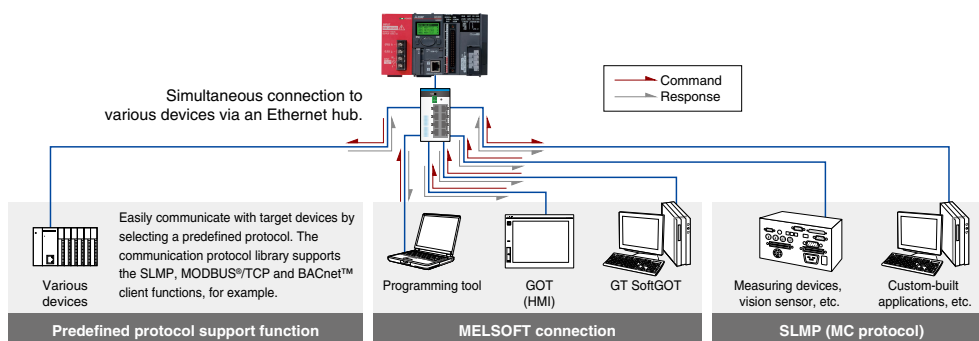

## Network timestamp

Synchronize systems on an Ethernet network using an SNTP\*1 server. Time synchronization can be achieved to enable simultaneous operations, quality control, or error tracking.

\*1: SNTP: Simple Network Time Protocol

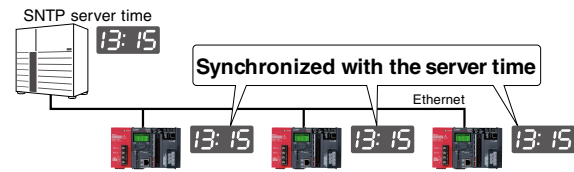

## Program-less device data transfer

### Simple PLC communication function\*2



Using the programming tool, a simple parameter setting is all that is needed to transfer device data such as production information with no programming required.

This function makes it possible to easily establish communications not only with L Series, but also Q Series and QnA/A Series controllers.

\*2: CPU module whose first five serial number digits are "13042" or later is required.

| Item                  | Description  |
|-----------------------|--|
| Communication pattern | Read<br>Read the data of the specified destination device (transmission source) to the specified device of the host station (transmission destination).  |
|                       | Write<br>Write the data of the specified device of the host station (transmission source) to the specified destination device (transmission destination).  |
|                       | Transfer<br>Read the data of the specified destination device (transmission source) and write it to another specified destination device (transmission destination).   |
| Communication setting | Execution interval<br>Set between 10 ms and 65535 ms (1 ms unit)   |
|                       | Request contact<br>Data send/receive is executed at the rising edge (OFF to ON) of the specified device (X, M, B).   |
|                       | Setting No.<br>Set between 1 and 64.   |
| Available devices     | Device points<br>The maximum number that can be set for each setting No. is 512 words. (Maximum points of a word device: 256 points + Maximum points of a bit device: 4096 points)<br>The total of setting No. 1...64 is maximum 4096 words. |

### Simple PLC Communication Setting

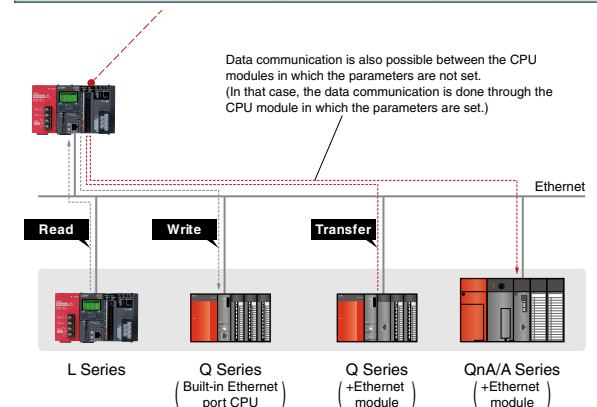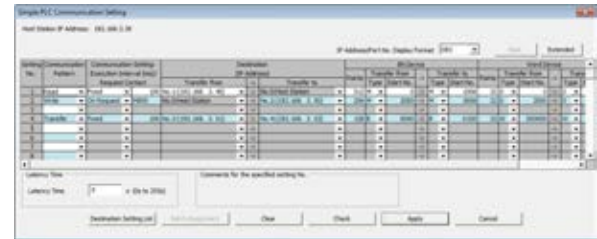

## SD memory card special features

Use the SD/SDHC compatible memory card to quickly and easily back-up the CPU programs and parameters.

The backups can then be just as easily restored or used to program other CPUs. The memory card can also be used to hold data captured with the data logging function\*3.

\*3: For details about the data logging function, please refer to page 9.

## Save/load programs directly into the Programmable Controller

### Multiple project save/load function\*4

Parameters, program files, etc., can be saved/read onto an SD memory card by simply using the onboard display unit, without having to connect to a separate PC. Once saved on the SD memory card, files can be sent via e-mail, for example, when requiring off-site editing of the files.

\*4: Supported by CPU module whose first five serial number digits are "14042" or later.








### Gain more flexibility with an integrated system bus structure

Save space in control panels by utilizing the integrated system bus structure. Flexibility in system design is made possible by choosing only the required expansion modules for the application.

### Expand L Series systems with no base unit restrictions


L Series modules do not require a base unit. The installation space is not restricted by base size, and the system can be installed with minimal required space.

Furthermore, the addition of modules to the system is not restricted by the number of available base unit slots and costs may be reduced due to the elimination of extension base units.

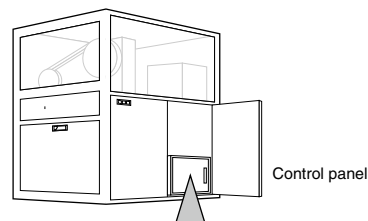

Control panel

### Base unit not required!

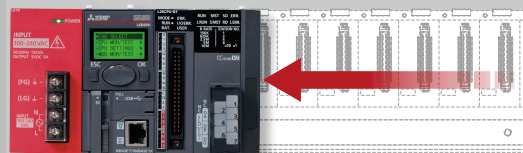


Installation space is reduced in the control panel

### Identify important information easily

Every L Series module has the serial number printed on the front surface of the module to allow viewing even during system operation (modules do not need to be removed).

\*: Serial numbers can also be checked using GX Works2.



Function version

A serial number is printed on the front surface.

## System expandable according to production equipment scale

Up to three extension blocks connectable to the main block using branch and extension modules. A maximum of 40 modules\*<sup>1</sup> caters a wide range of production equipment and line scale.

| CPU module* <sup>2</sup>  | Number of extension blocks | Number of connectable modules* <sup>3</sup>           |
|---------------------------|----------------------------|---|
| L02SCPU(-P)<br>L02CPU(-P) | Up to 2 blocks             | Main block: 10 modules<br>Extension block: 11 modules |
| L06CPU(-P)<br>L26CPU(-P)  | Up to 3 blocks             |   |
| L26CPU(-P)BT              |                            |   |

\*1: In the case of L06CPU(-P), L26CPU(-P), and L26CPU(-P)BT.


\*2: CPU modules whose first five serial number digits are 13072 or later.

\*3: Total number of I/O modules, intelligent function modules, network modules and branch modules.

This does not include the following: Power supply, CPU, display units, extension modules, RS-232 adapter, RS-422/485 adapter, and END covers.

When adding a branch module to a fully occupied block, relocate one of the other modules to a new block to give way to the branch module.

### Example of largest system configuration of L26CPU-BT

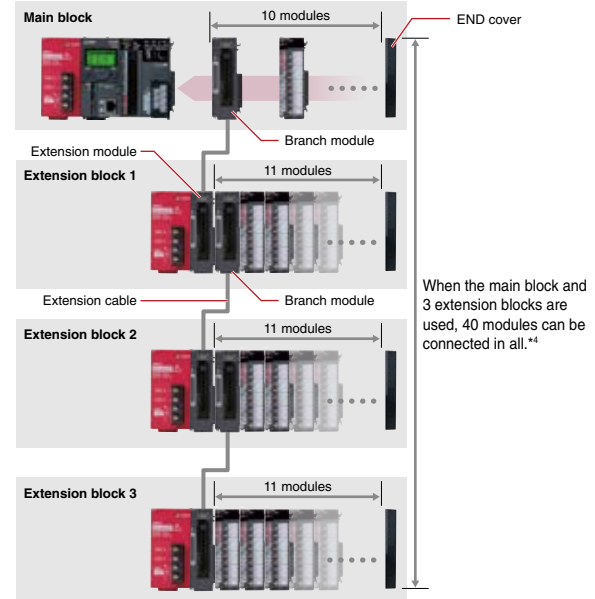

\*4: Total number of I/O modules, intelligent function modules and network modules, excluding branch modules.


## Well-organized control panel with minimum wiring

Branch module can be strategically placed in a block to minimize wiring space. Extension cables are available in 0.6-, 1.0- and 3.0-m. The maximum extension length is 3.0 m\*<sup>5</sup>.


The extension cable is a one-touch type which can be easily connected and disconnected.

\*5: The total length of extension cables should be within 3.0 m.



### Example of vertical system configuration

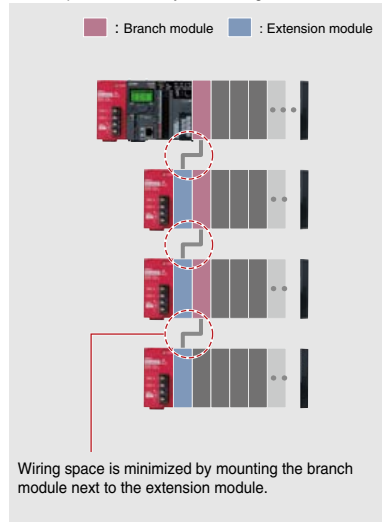

### Example of horizontal system configuration

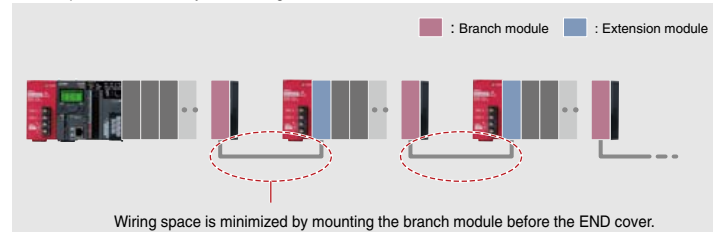

### Example of vertical and horizontal mixed system

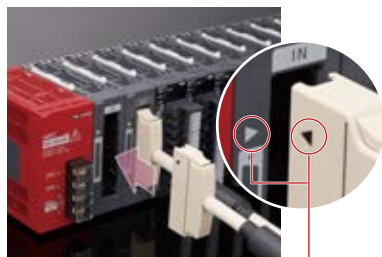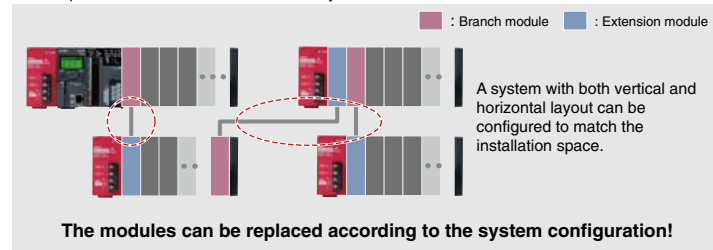

Matching marks on the slot and the cable

### Installation position when branch or extension module is used

| Modules          | Installed block | Possible installation position                           |
|------------------|-----------------|--|
| Branch module    | Main block      | Right side of CPU module or left side of END cover       |
|                  | Extension block | Right side of extension module or left side of END cover |
| Extension module | Main block      | Not applicable   |
|                  | Extension block | Right side of power supply module                        |

## Historical trend and live feeds of production


The data logging function\*1 embedded in the CPU module allows collected data to be saved in CSV format on an SD memory card simply by using the dedicated setting tool wizard. Additionally, the real-time feature enables live feeds of production data with setup options enabling adjustment of data capture timings.

\*1: Not equipped in L02SCPU(-P).



## Easily collect production data


Utilizing the installed SD memory card or a direct live connection to the CPU module, logging data can be easily realized just by simply registering parameters. Logged data can be saved in CSV format and utilized in a number of ways, such as for using on third-party spreadsheet software or as a real-time feed data for analyzing various manufacturing processes. The real-time feature of GX LogViewer also enables live feeds showing device status changes, helping to improve traceability, smooth startup, and debugging.

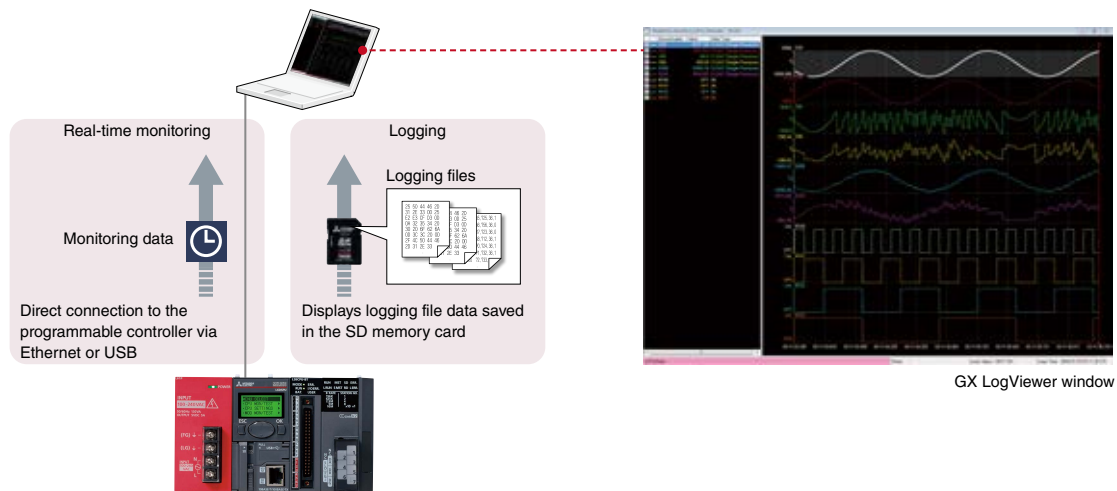

## Logging of control data variances

Data is collected during each scan or within millisecond intervals allowing detection of control deviation even at very high speeds. Therefore, identification of errors can be conducted faster and in more detail.


- Generic sample data from a PC or external device at 100 ms intervals
- L Series data logging function is capable of sampling data at much higher intervals as to detect fast changing values.

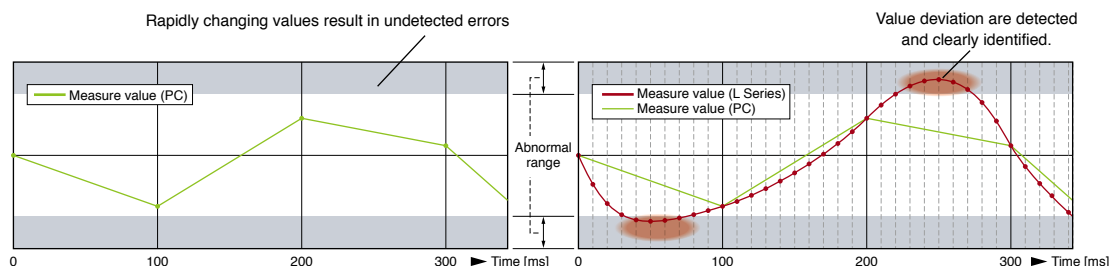



## Auto logging function


Automatic data logging realized just by inserting the SD memory card into the CPU, which is achieved as the memory card includes the logging configuration file. Instructing data logging remotely is also realized just by sending the configuration file by e-mail and copying onto the SD memory card.

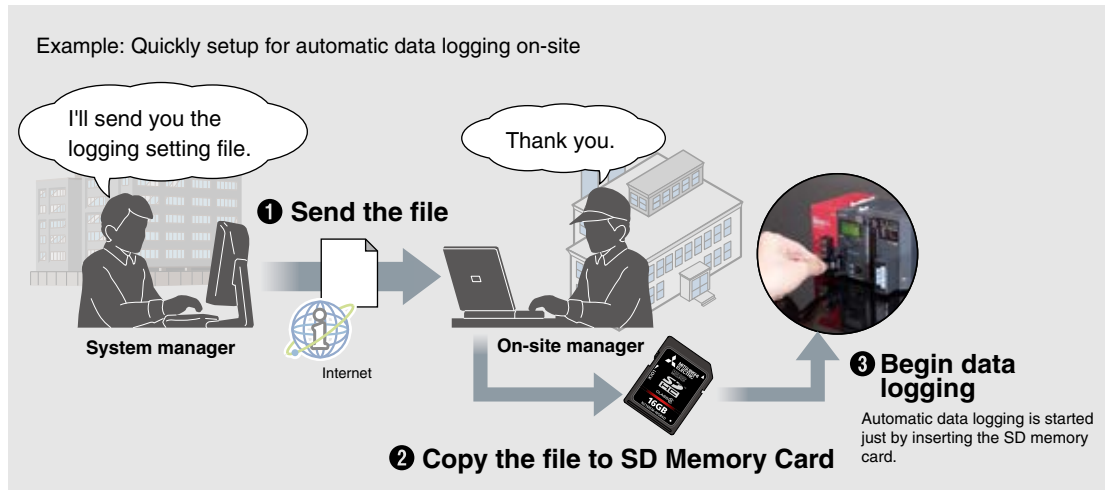

## Automatically send logging files to FTP server

Data logging files saved on the SD memory card can be sent to the FTP server just by making a simple setting with the logging configuration tool. As the logging server can handle multiple files, management and maintenance tasks can be reduced.


### File transfer feature\*1

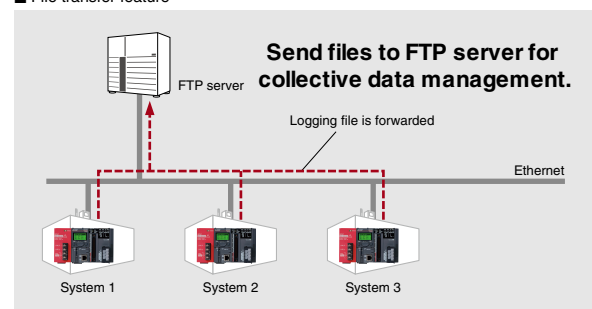

\*1: Using a CPU module with the first 5 digits of the serial number "12112" or later.


## Trigger logging function

Error causes and solutions can be quickly done as only the required data related to the problem is extracted, without having to spend time on filtering large volumes of diagnostic data.

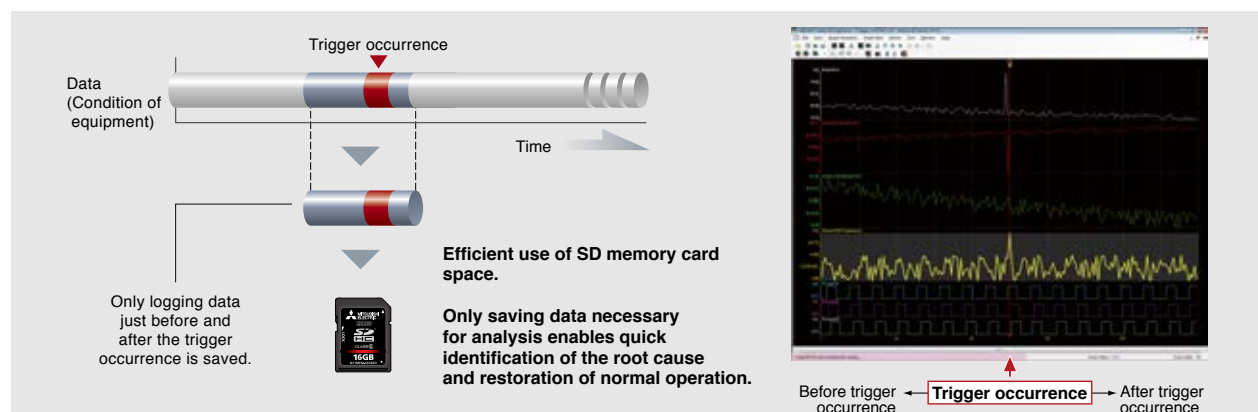

To receive a copy of GX LogViewer, contact your local Mitsubishi Electric representative.

## L Series Features

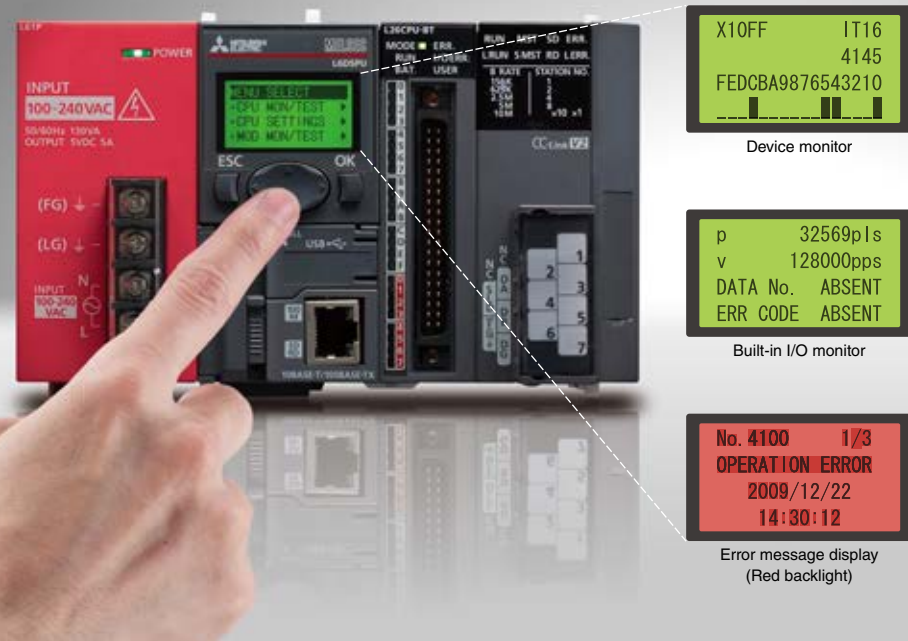

## Feature rich and easy to use display


Check the system status and make setting changes directly from the display. Error status is clearly identified and troubleshooting and error investigation can be performed all without the need for any connections or engineering software.

\*: Not available for L02SCPU(-P).

L02CPU(-P) L06CPU(-P) L26CPU(-P) L26CPU(-P)BT


### Instant error information check

Error history and detailed error information are available directly from the display unit.

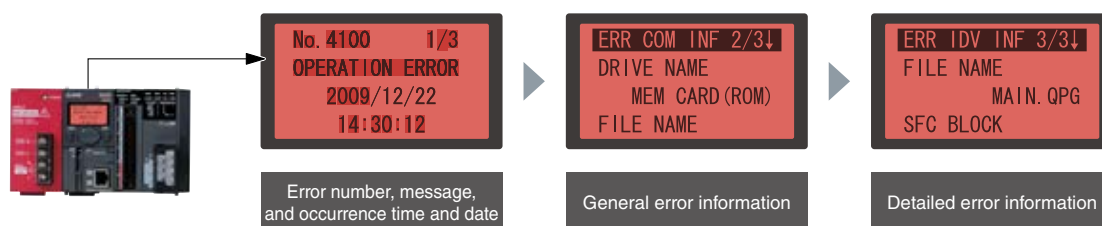

## Intuitive menu navigation

The menu navigation guide shows the current menu tree location and an arrow to indicate the scroll direction at the top of the display.

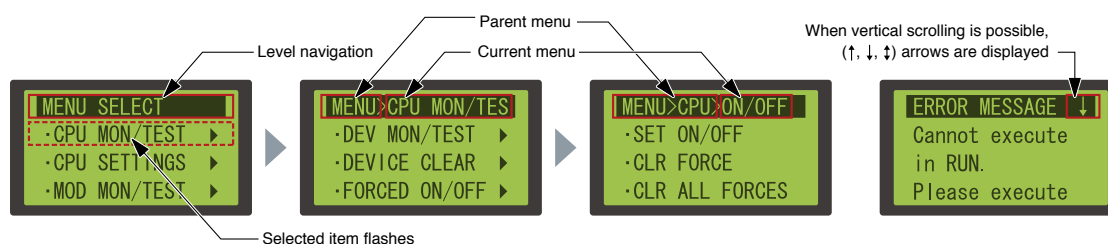

## Multilingual operation

The display unit language can be selected (Japanese or English).






## An easy-to-use modular design

The L Series module labeling design has been created to ensure clear legibility and identification of information at a glance to avoid mistakes.

### Universal design

#### Adopting a universal font

A high visibility font has been chosen for characters printed on system modules.



#### ■ Regular Gothic font

0 1 2 3 4  
5 6 7 8 9  
A B C D E

The characters are thick enough, however the numbers "3, 6, 8, 9" and the alphabet "C" are not clearly distinguishable because the spacing indicated with a red circle is not large enough.


#### ■ Font for L Series

0 1 2 3 4  
5 6 7 8 9  
A B C D E


The space indicated with a red circle has been enlarged. The numbers "3, 6, 8, 9" and the alphabet "C" are clearly distinguishable. Characters are legible even in small print.

### Module design

White and red are used to distinguish inputs from outputs respectively to allow for easy identification of terminal connection type.



White for input module



Red for output module

### Easily identify module status

LEDs display the current status of modules including run and error states.



LEDs are located on the top front surface of the modules.



## CPU Modules

Communication interface:  
RS-232

**L02SCPU**

General-purpose output: Sink type  
Program capacity: 20K steps  
Basic operation processing speed: 60 ns  
\*: End cover is enclosed.  
Cannot be mounted on display unit (L6DSPU), RS-232 adapter, RS-422/485 adapter.

**L02SCPU-P**

General-purpose output: Source type  
Program capacity: 20K steps  
Basic operation processing speed: 60 ns

Communication interface:  
Ethernet

**L02CPU**

General-purpose output: Sink type  
Program capacity: 20K steps  
Basic operation processing speed: 40 ns  
\*: END cover is included.

**L02CPU-P**

General-purpose output: Source type  
Program capacity: 20K steps  
Basic operation processing speed: 40 ns

**L06CPU**

General-purpose output: Sink type  
Program capacity: 60K steps  
Basic operation processing speed: 9.5 ns  
\*: END cover is included.

**L06CPU-P**

General-purpose output: Source type  
Program capacity: 60K steps  
Basic operation processing speed: 9.5 ns

**L26CPU**

General-purpose output: Sink type  
Program capacity: 260K steps  
Basic operation processing speed: 9.5 ns  
\*: END cover is included.

**L26CPU-P**

General-purpose output: Source type  
Program capacity: 260K steps  
Basic operation processing speed: 9.5 ns



Communication interface:  
Ethernet port and a  
built-in CC-Link interface

**L26CPU-BT**

General-purpose output: Sink type  
Program capacity: 260K steps  
Basic operation processing speed: 9.5 ns  
\*: END cover is included.

**L26CPU-PBT**

General-purpose output: Source type  
Program capacity: 260K steps  
Basic operation processing speed: 9.5 ns

| Model      | General-purpose output | Number of I/O points | Program capacity | Basic operation processing speed (LD instruction) | Peripheral connection ports | Built-in network  |
|------------|------------------------|----------------------|------------------|---|-----------------------------|---|
| L02SCPU    | Sink type              | 1024 points          | 20K steps        | 60 ns   | USB/RS-232                  | —   |
| L02CPU     |                        |                      |                  | 40 ns   | USB/Ethernet                | —   |
| L06CPU     |                        | 4096 points          | 60K steps        | 9.5 ns  |                             | —   |
| L26CPU     |                        |                      | 260K steps       |   |                             | —   |
| L26CPU-BT  |                        |                      |                  |   |                             |  |
| L02SCPU-P  | Source type            | 1024 points          | 20K steps        | 60 ns   | USB/RS-232                  | —   |
| L02CPU-P   |                        |                      |                  | 40 ns   | USB/Ethernet                | —   |
| L06CPU-P   |                        | 4096 points          | 60K steps        | 9.5 ns  |                             | —   |
| L26CPU-P   |                        |                      | 260K steps       |   |                             | —   |
| L26CPU-PBT |                        |                      |                  |   |                             |  |

## CPU packages

## ■ L02CPU-SET

Includes CPU (L02CPU), power supply module (L61P), and display unit (L6DSPU).

## ■ L02CPU-P-SET

Includes CPU (L02CPU-P), power supply module (L61P), and display unit (L6DSPU).



## ■ L26CPU-SET

Includes CPU (L26CPU), power supply module (L61P), and display unit (L6DSPU).

## ■ L26CPU-P-SET

Includes CPU (L26CPU-P), power supply module (L61P), and display unit (L6DSPU).



## ■ L06CPU-SET

Includes CPU (L06CPU), power supply module (L61P), and display unit (L6DSPU).

## ■ L06CPU-P-SET

Includes CPU (L06CPU-P), power supply module (L61P), and display unit (L6DSPU).



## ■ L26CPU-BT-SET

Includes CPU (L26CPU-BT), power supply module (L61P), and display unit (L6DSPU).

## ■ L26CPU-PBT-SET

Includes CPU (L26CPU-PBT), power supply module (L61P), and display unit (L6DSPU).



## ■ General specifications

General specifications indicate the environmental specifications in which this product can be installed and operated. Unless otherwise specified, these general specifications apply to all L Series products.  
\*: General specifications of jointly developed products are different from those of MELSEC products. For more information, please refer to the product manuals or contact your local Mitsubishi Electric representative.

| Item                          | Specification  |                              |                            |                       |                |                                     |
|-------------------------------|--|------------------------------|----------------------------|-----------------------|----------------|-------------------------------------|
| Operating ambient temperature | 0...55°C   |                              |                            |                       |                |                                     |
| Storage ambient temperature   | -25...75°C   |                              |                            |                       |                |                                     |
| Operating ambient humidity    | 5...95%RH, non-condensing  |                              |                            |                       |                |                                     |
| Storage ambient humidity      |  |                              |                            |                       |                |                                     |
| Vibration resistance          | Compliant with JIS B 3502 and IEC 61131-2  |                              | Frequency                  | Constant acceleration | Half amplitude | Sweep count                         |
|                               |  | Under intermittent vibration | 5...8.4 Hz                 | —                     | 3.5 mm         | 10 times each in X, Y, Z directions |
|                               |  |                              | Under continuous vibration | 8.4...150 Hz          | 9.8 m/s²       |                                     |
|                               |  | 5...8.4 Hz                   |                            | —                     | 1.75 mm        | —                                   |
| 8.4...150 Hz                  | 4.9 m/s²   | —                            |                            |                       |                |                                     |
| Shock resistance              | Compliant with JIS B 3502 and IEC 61131-2 (147 m/s², 3 times each in directions X, Y, Z) |                              |                            |                       |                |                                     |
| Operating atmosphere          | No corrosive gases   |                              |                            |                       |                |                                     |
| Operating altitude*1          | 0...2000 m   |                              |                            |                       |                |                                     |
| Installation location         | Inside a control panel   |                              |                            |                       |                |                                     |
| Overvoltage category*2        | ≤ II   |                              |                            |                       |                |                                     |
| Pollution degree*3            | ≤ 2  |                              |                            |                       |                |                                     |
| Equipment class               | Class I  |                              |                            |                       |                |                                     |

\*1: Do not use or store the programmable controller under pressure higher than the atmospheric pressure of altitude 0 m.

Doing so may cause malfunction. When using the programmable controller under pressure, please consult your local Mitsubishi Electric representative.

\*2: This indicates the section of the power supply to which the equipment is assumed to be connected between the public electrical power distribution network and the machinery within premises.

Category II applies to equipment for which electrical power is supplied from fixed facilities. The surge voltage withstand level for up to the rated voltage of 300 V is 2500 V.

\*3: This index indicates the degree to which conductive material is generated in terms of the environment in which the equipment is used.

Pollution level 2 is when only non-conductive pollution occurs. A temporary conductivity caused by condensing must be expected occasionally.

## ■ CPU module specifications

| Item  |  |                      | L02SCPU<br>L02SCPU-P   | L02CPU<br>L02CPU-P   | L06CPU<br>L06CPU-P     | L26CPU<br>L26CPU-P       | L26CPU-BT<br>L26CPU-PBT   |
|---|--|----------------------|--|--|------------------------|--------------------------|---|
| Control method                                      |  |                      | Stored program cyclic operation  |  |                        |                          |   |
| I/O control mode                                    |  |                      | Refresh mode<br>(The direct access input/output is available by specifying the direct access input/output (DX, DY).)                         |  |                        |                          |   |
| Programming language<br>(sequence control language) |  |                      | Function block, relay symbol language, MELSP3 (SFC), MELSP-L, structured text (ST), logic symbolic language                                  |  |                        |                          |   |
| Processing speed*4<br>(sequence instruction)        | LD instruction   |                      | 60 ns  | 40 ns  | 9.5 ns                 |                          |   |
|   | MOV instruction  |                      | 120 ns   | 80 ns  | 19 ns                  |                          |   |
| Constant scan                                       |  |                      | 0.5...2000 ms (Setting is available in increments of 0.5 ms by parameter.)   |  |                        |                          |   |
| Program capacity                                    |  |                      | 20K steps (80K bytes)  |  | 60K steps (240K bytes) | 260K steps (1040K bytes) |   |
| Memory capacity                                     | Program memory (drive 0)                                 |                      | 80K bytes  |  | 240K bytes             | 1040K bytes              |   |
|   | Memory card (RAM) (drive 1)                              |                      | —  |  |                        |                          |   |
|   | Memory card (ROM) (drive 2)                              |                      | —  | Depends on the SD/SDHC memory card used.*5                                   |                        |                          |   |
|   | Standard RAM (drive 3)                                   |                      | 128K bytes   |  | 768K bytes             |                          |   |
|   | Standard ROM (drive 4)                                   |                      | 512K bytes   |  | 1024K bytes            | 2048K bytes              |   |
| Maximum number of files stored                      | Program memory   |                      | 64 files   |  | 124 files              | 252 files                |   |
|   | Memory card (RAM)  |                      | —  |  |                        |                          |   |
|   | Memory card (ROM)  | SD                   | —  | Root directory: 511 files (maximum)<br>Subdirectory: 65533 files (maximum)   |                        |                          |   |
|   |  | SDHC                 | —  | Root directory: 65534 files (maximum)<br>Subdirectory: 65533 files (maximum) |                        |                          |   |
|   | Standard RAM   |                      | 4 files (each one of the following files: file register file, local device file, sampling trace file, and module error collection file)      |  |                        |                          |   |
|   | Standard ROM   |                      | 128 files  |  | 256 files              |                          |   |
|   | Maximum number of intelligent function module parameters | Initial setting      | 2048 parameters  |  | 4096 parameters        |                          |   |
| Refresh   |  | 1024 parameters      |  | 2048 parameters  |                        |                          |   |
| Maximum number of installable modules*6             |  |                      | 30   |  | 40                     |                          |   |
| Built-in I/O function                               |  |                      | Refer to the built-in I/O specifications ➡ P.16 to P.18  |  |                        |                          |   |
| Data logging function                               |  |                      | —  | Refer to the data logging function specifications ➡ P.17                     |                        |                          |   |
| Built-in Ethernet function                          |  |                      | —  | Refer to the built-in Ethernet specifications ➡ P.18                         |                        |                          |   |
| Built-in serial communication function              |  |                      | Refer to the built-in serial communication specifications ➡ P.18   | —  |                        |                          |   |
| Built-in CC-Link function                           |  |                      | —  |  |                        |                          | Refer to the CC-Link Master/Local Module specifications. ➡ P.55 |
| Clock function                                      | Displayed information                                    |                      | Year, month, date, hour, minute, second, and day of the week (automatic leap year detection)   |  |                        |                          |   |
|   | Accuracy   |                      | 0°C: -2.96...+3.74 s (TYP. +1.42 s) per day<br>25°C: -3.18...+3.74 s (TYP. +1.50 s) per day<br>55°C: -13.20...+2.12 s (TYP. -3.54 s) per day |  |                        |                          |   |
| 5 V DC internal current consumption                 | CPU  | With display unit    | —  | 1.00 A   | 1.06 A                 |                          | 1.43 A  |
|   |  | Without display unit | 0.75 A   | 0.94 A   | 1.00 A                 |                          | 1.37 A  |
|   | END cover (Accessory)*7                                  |                      | 0.04 A   |  |                        |                          |   |
| Weight  | CPU  | With display unit    | —  | 0.40 kg  |                        |                          | 0.50 kg   |
|   |  | Without display unit | 0.32 kg  | 0.37 kg  |                        |                          | 0.47 kg   |
|   | END cover (Accessory)*7                                  |                      | 0.06 kg  |  |                        |                          |   |

\*4: Indexing devices does not delay processing time.

\*5: The operation of devices that are not manufactured or recommended as compatible products by Mitsubishi Electric cannot be guaranteed.

\*6: The total number of modules that can be installed onto a CPU module. Also refer to the "Module size allocation" for each module.

(Power supply modules, CPU module, Display unit, Extension module, RS-232 adapter, RS-422/485 adapter, END cover, and END cover with error terminal are not included. Note that only one CPU per system is possible.)

\*7: The END cover is included with the CPU module and must be placed on the right end of the last module in the system.

### ■ CPU module device specifications

| Item   |      | L02SCPU<br>L02SCPU-P  | L02CPU<br>L02CPU-P | L06CPU<br>L06CPU-P   | L26CPU<br>L26CPU-P | L26CPU-BT<br>L26CPU-PBT |
|--|------|---|--------------------|--|--------------------|-------------------------|
| Number of I/O device points<br>(number of points available on a program) |      | 8192 points (X/Y0...X/Y1FFF)  |                    |  |                    |                         |
| Number of I/O points   |      | 1024 points (X/Y0...X/Y3FF)   |                    | 4096 points (X/Y0...X/YFFF)  |                    |                         |
| Internal relay (M)   |      | 8192 points (M0...M8191) by default (changeable)  |                    |  |                    |                         |
| Latch relay (L)  |      | 8192 points (L0...L8191) by default (changeable)  |                    |  |                    |                         |
| Link relay (B)   |      | 8192 points (B0...B1FFF) by default (changeable)  |                    |  |                    |                         |
| Timer (T)  |      | 2048 points (T0...T2047) by default (changeable) (Low-speed and high-speed timers available)<br>(Low-speed timer: 1...1000 ms (in increments of 1 ms), default: 100 ms)<br>(High-speed timer: 0.1...100 ms (in increments of 0.1 ms), default: 10 ms)             |                    |  |                    |                         |
| Retentive timer (ST)   |      | 0 point by default (changeable)(Low-speed and high-speed retentive timers available)<br>(Low-speed retentive timer: 1...1000 ms (in increments of 1 ms), default: 100 ms)<br>(High-speed retentive timer: 0.1...100 ms (in increments of 0.1 ms), default: 10 ms) |                    |  |                    |                         |
| Counter (C)  |      | Normal counter 1024 points (C0...C1023) by default (changeable)   |                    |  |                    |                         |
| Data register (D)  |      | 12288 points (D0...D12287) by default (changeable)  |                    |  |                    |                         |
| Extended data register (D)   |      | 32768 points (D12288...D45055) by default (changeable)  |                    | 131072 points (D12288...D143359) by default (changeable)                                 |                    |                         |
| Link register (W)  |      | 8192 points (W0...W1FFF) by default (changeable)  |                    |  |                    |                         |
| Extended link register (W)   |      | 0 point by default (changeable)   |                    |  |                    |                         |
| Annunciator (F)  |      | 2048 points (F0...F2047) by default (changeable)  |                    |  |                    |                         |
| Edge relay (V)   |      | 2048 points (V0...V2047) by default (changeable)  |                    |  |                    |                         |
| Link special relay (SB)  |      | 2048 points (SB0...SB7FF) by default (changeable)   |                    |  |                    |                         |
| Link special register (SW)   |      | 2048 points (SW0...SW7FF) by default (changeable)   |                    |  |                    |                         |
| File register  | (R)  | 32768 points (R0...R32767)<br>(Maximum 65536 points are available by switching blocks.)   |                    | 32768 points (R0...R32767)<br>(Maximum 393216 points are available by switching blocks.) |                    |                         |
|  | (ZR) | 65536 points (ZR0...ZR65535)<br>(Blocks do not need to be switched.)  |                    | 393216 points (ZR0...ZR393215)<br>(Blocks do not need to be switched.)                   |                    |                         |
| Step relay (S)   |      | 8192 points (S0...S8191) by default   |                    |  |                    |                         |
| Index register/standard device register (Z)                              |      | 20 point (Z0...Z19) (maximum)   |                    |  |                    |                         |
| Index register (Z)   |      | 10 point (Z0...Z18) (maximum)   |                    |  |                    |                         |
| (32-bit index modification of ZR device)                                 |      | (The index register is used as a double-word device.)   |                    |  |                    |                         |
| Pointer (P)  |      | 4096 points (P0...P4095) (The local pointer range and the common pointer range can be set by parameter.)  |                    |  |                    |                         |
| Interrupt pointer (I)  |      | 256 points (I0...I255)<br>(The fixed scan interval for the system interrupt pointer I28...I31 can be set by parameter.)<br>0.5...1000 ms (in increments of 0.5 ms)<br>Default I28: 100 ms, I29: 40 ms, I30: 20 ms, I31: 10 ms                                     |                    |  |                    |                         |
| Special relay (SM)   |      | 2048 points (SM0...SM2047) (The number of device points is fixed.)  |                    |  |                    |                         |
| Special register (SD)  |      | 2048 points (SD0...SD2047) (The number of device points is fixed.)  |                    |  |                    |                         |
| Function input (FX)  |      | 16 points (FX0...FX F) (The number of device points is fixed.)  |                    |  |                    |                         |
| Function output (FY)   |      | 16 points (FY0...FY F) (The number of device points is fixed.)  |                    |  |                    |                         |
| Function register (FD)   |      | 5 points (FD0...FD4) (The number of device points is fixed.)  |                    |  |                    |                         |
| Intelligent function module device                                       |      | Device that directly accesses the buffer memory of an intelligent function module<br>Specification format: U□□/G□□  |                    |  |                    |                         |
| Latch (data retention during power failure) range                        |      | 8192 points (L0...L8191) by default<br>(The latch range can be set for the devices, B, F, V, T, ST, C, D, W, and R by parameter.)   |                    |  |                    |                         |



## ■ CPU built-in I/O function – input specifications (general-purpose input/interrupt input/pulse catch function)

| Item             |                             |                    | Description  |
|------------------|-----------------------------|--------------------|--|
| Standard input   | Points                      |                    | 10   |
|                  | Input voltage/current       |                    | 24 V DC 4.1 mA (TYP.)  |
|                  | Minimum input response time |                    | 100 µs   |
|                  | Input response time setting |                    | 0.1 ms, 1 ms, 5 ms, 10 ms, 20 ms, 70 ms  |
|                  | Common terminal arrangement |                    | 10 points/common (Positive or negative common)   |
| High-speed input | Points                      |                    | 6  |
|                  | Input voltage/current       | DC input           | 24 V DC 6.0 mA (TYP.)  |
|                  |                             | Differential input | EIA Standard RS-422-A Differential line driver level<br>AM26L31 (manufactured by Texas Instruments Incorporated) or equivalent |
|                  | Minimum input response time |                    | 10 µs  |
|                  | Input response time setting |                    | 0.01 ms/0.1 ms/0.2 ms/0.4 ms/0.6 ms/1 ms   |
|                  | Common terminal arrangement |                    | Independent  |

## ■ CPU built-in I/O function – output specifications (general-purpose output function)

| Item                        |           |  | Description   |
|-----------------------------|-----------|--|---|
| Points                      |           |  | 8   |
| Output voltage/current      |           |  | 5...24 V DC 0.1 A   |
| Response time               | OFF to ON |  | ≤ 1 µs (rated load, resistance load)  |
|                             | ON to OFF |  |   |
| Common terminal arrangement |           |  | L02SCPU, L02CPU, L06CPU, L26CPU, L26CPU-BT: 8 points/common (Sink type)<br>L02SCPU-P, L02CPU-P, L06CPU-P, L26CPU-P, L26CPU-PBT: 8 points/common (Source type) |

## ■ CPU built-in I/O function – positioning function specifications

| Item                                  |   |                                  | Description   |
|---------------------------------------|---|----------------------------------|---|
| Number of controlled axes             |   |                                  | 2   |
| Control unit                          |   |                                  | pulse   |
| Operation pattern                     |   | PTP*1 control                    | Available   |
|                                       |   | Path control                     | Not usable  |
| Number of positioning data            |   |                                  | 10 data/axis  |
| Positioning control                   | Positioning control method                  | PTP*1 control                    | ABS/INC   |
|                                       |   | Speed/position switching control | INC   |
|                                       | Positioning range                           | PTP*1 control                    | -2147483648...2147483647 pulses   |
|                                       |   | Speed/position switching control | 0...2147483647 pulses   |
|                                       | Speed command                               |                                  | 0...200k pulses/s   |
|                                       | Acceleration/deceleration system selection  |                                  | Automatic trapezoid acceleration/deceleration and S-curve acceleration/deceleration   |
| Acceleration/deceleration time        |   | 0...32767 ms                     |   |
| OPR method                            |   |                                  | 6 types   |
| Starting time (1-axis linear control) |   |                                  | Trapezoid acceleration/deceleration (single-axis start): 30 μs/axis<br>S-curve acceleration/deceleration (single-axis start): 35 μs/axis                        |
| Command pulse output                  | Pulse output method                         |                                  | L02SCPU, L02CPU, L06CPU, L26CPU, L26CPU-BT: 5...24V DC (Sink type)<br>L02SCPU-P, L02CPU-P, L06CPU-P, L26CPU-P, L26CPU-PBT: 5...24V DC (Source type)             |
|                                       | Pulse output mode                           |                                  | 4 types   |
|                                       | Maximum output pulse                        |                                  | 200k pulses/s   |
|                                       | Maximum connection distance with drive unit |                                  | 2 m   |
| External input                        | Zero signal                                 | DC input                         | 24 V DC 6.0 mA (TYP.)   |
|                                       |   | Differential input               | EIA RS-422-A differential line driver level<br>AM26L31 (manufactured by Texas Instruments Incorporated) or equivalent   |
|                                       | Speed/position switching signal             |                                  | 24 V DC 4.1 mA (TYP.)   |
|                                       | Near-point dog signal                       |                                  |   |
|                                       | Upper and lower limit signal                |                                  |   |
|                                       | Drive unit ready signal                     |                                  |   |
|                                       | Input response time                         |                                  | Zero signal: 10 μs<br>Speed/position switching control, near-point dog signal: 100 μs<br>Upper and lower limit signal, drive unit ready signal: 2 ms            |
| External output                       | Deviation counter clear signal              |                                  | L02SCPU, L02CPU, L06CPU, L26CPU, L26CPU-BT: 5...24 V DC 0.1A (Sink type)<br>L02SCPU-P, L02CPU-P, L06CPU-P, L26CPU-P, L26CPU-PBT: 5...24 V DC 0.1A (Source type) |
|                                       | Response time                               | OFF to ON<br>ON to OFF           | ≤ 1 μs (rated load, resistive load)   |

\*1: Abbreviation for "Point to Point." This is a type of position control.

### ■ CPU built-in I/O function – high-speed counter specifications

| Item                    |  |                                       | Description  |
|-------------------------|--|---------------------------------------|--|
| Number of channels      |  |                                       | 2  |
| Count input signal      | Phase                                      |                                       | 1-phase input (1 multiple/2 multiples)<br>CW/CCW,<br>2-phase input (1 multiple/2 multiples/4 multiples)                        |
|                         | Signal level                               | DC input                              | 24 V DC 6.0 mA (TYP.)  |
|                         |  | Differential input                    | EIA Standard RS-422-A Differential line driver level<br>AM26L31 (manufactured by Texas Instruments Incorporated) or equivalent |
| Counter                 | Maximum counting speed                     |                                       | 200k pulses/s (for 2 multiples of 1 phase and 4 multiples of 2 phases)   |
|                         | Counting range                             |                                       | -2147483648...2147483647   |
|                         | Model                                      |                                       | UP/DOWN preset counter (with ring counter function)  |
|                         | Minimum count pulse width (Duty ratio 50%) | 1 phase                               | 5 $\mu$ s  |
|                         |  | 2 phases                              | 10 $\mu$ s   |
|                         | Min. phase differential for 2-phase input  |                                       | 5 $\mu$ s  |
| External input          | Phase Z (preset)                           | DC input                              | 24 V DC 6.0 mA (TYP.)  |
|                         |  | Differential input                    | EIA Standard RS-422-A Differential line driver level<br>AM26L31 (manufactured by Texas Instruments Incorporated) or equivalent |
|                         | Function start                             |                                       | 24 V DC 4.1 mA (TYP.)  |
|                         | Latch                                      |                                       |  |
| External output         | Input response time                        |                                       | Phase Z: 10 $\mu$ s<br>Function start, latch: 100 $\mu$ s  |
|                         | Output format                              |                                       | L02SCPU, L02CPU, L06CPU, L26CPU, L26CPU-BT: Sink type<br>L02SCPU-P, L02CPU-P, L06CPU-P, L26CPU-P, L26CPU-PBT: Source type      |
|                         | Output voltage/current                     | Coincidence output No. 1 / PWM output | 5...24 V DC/0.25 A <sup>*1</sup>   |
|                         |  | Coincidence output No. 2              | 5...24 V DC/0.1 A  |
|                         | Response time                              | OFF to ON                             | $\leq 1 \mu$ s (Rated load, resistance load)   |
|                         |  | ON to OFF                             |  |
| Coincidence output      | Comparison range                           |                                       | -2147483648...2147483647   |
|                         | Comparison result                          |                                       | Set value < Counted value<br>Set value = Counted value<br>Set value > Counted value  |
|                         | Output points                              |                                       | 2 points/channel   |
| PWM output              | Output frequency range                     |                                       | DC...200 kHz   |
|                         | ON width                                   |                                       | 1 $\mu$ s  |
|                         | Duty ratio                                 |                                       | On width can be set in increments of 0.1 $\mu$ s.  |
|                         | Output points                              |                                       | 1 point/channel  |
| Pulse width measurement | Measurement item                           |                                       | Pulse width (On width: $\geq 200 \mu$ s, Off width: $\geq 200 \mu$ s)  |
|                         | Measurement resolution                     |                                       | 5 $\mu$ s  |
|                         | Measurement points                         |                                       | 1 point/channel  |

\*1: For units where the first six digits of the serial number are "120722" or later. The specification for previous serial numbers is 5 to 24 V DC/0.1 A.

### ■ CPU data logging function specifications

| Item                            |                               |                                   | L02CPU<br>L02CPU-P  | L06CPU<br>L06CPU-P  | L26CPU<br>L26CPU-P   | L26CPU-BT<br>L26CPU-PBT |
|---------------------------------|-------------------------------|-----------------------------------|---|---|--|-------------------------|
| Number of data logging settings |                               |                                   | 10  |   |  |                         |
| Data logging buffer capacity    |                               |                                   | For each setting, any of 32 to 4832K bytes (in units of 1K byte) can be specified.<br>The total value of settings No.1 to No.10 is up to 5120K bytes.   |   |  |                         |
| Data storage location           |                               |                                   | Standard ROM (configuration files only), SD Memory Card   |   |  |                         |
| Logging type                    |                               |                                   | <ul style="list-style-type: none"> <li>Continuous logging</li> <li>Trigger logging</li> </ul>   |   |  |                         |
| Data sampling                   | Sampling interval             |                                   | <ul style="list-style-type: none"> <li>Each scanning cycle</li> <li>Time specification</li> <li>Condition specification (Device specification, Step No. specification)</li> </ul>                                       |   |  |                         |
|                                 | No. of data sampling points   |                                   | Up to 1280 (128 points per setting)   |   |  |                         |
|                                 | AND conjunction               |                                   | In the Sampling interval setting, Device and Step No. under "Condition specification" can be specified in combination (AND conjunction).  |   |  |                         |
| Data processing                 | Trigger logging               | Trigger condition                 | <ul style="list-style-type: none"> <li>Condition specification (Device change specification, Step No. specification)</li> <li>When trigger instruction executed</li> <li>When data logging trigger activated</li> </ul> |   |  |                         |
|                                 |                               | AND conjunction                   | In the Trigger setting, Device data change and Step No. under "Condition specification" can be specified in combination (AND conjunction).  |   |  |                         |
|                                 |                               | Trigger logging range             | Data of the specified number of records are logged before and after a trigger.  |   |  |                         |
|                                 |                               | Number of triggers                | 1   |   |  |                         |
|                                 |                               | Number of trigger logging records | Up to 1000000   |   |  |                         |
| File output                     | File name                     |                                   | Up to 48 one-byte characters can be used for the following.<br>• File number (serial number) <sup>*2</sup> • Character string (name) <sup>*3</sup> • Date and time <sup>*3</sup>  |   |  |                         |
|                                 | File format                   |                                   | CSV file  |   |  |                         |
|                                 | Data type                     |                                   | <ul style="list-style-type: none"> <li>Bit</li> <li>Double word (unsigned)</li> <li>FLOAT (double precision)</li> </ul>   | <ul style="list-style-type: none"> <li>Word (unsigned)</li> <li>Double word (signed)</li> <li>Character string: 1...256 characters</li> </ul> | <ul style="list-style-type: none"> <li>Word (signed)</li> <li>FLOAT (single precision)</li> <li>Numeric string: 1...256 bytes</li> </ul> |                         |
|                                 | Data output format (CSV file) |                                   | <ul style="list-style-type: none"> <li>Decimal format</li> </ul>  | <ul style="list-style-type: none"> <li>Hexadecimal format</li> <li>Exponential format</li> </ul>  |  |                         |
| Handling of output files        | File switching                | File switching timing             | <ul style="list-style-type: none"> <li>No. of records</li> <li>File size</li> </ul>   |   |  |                         |
|                                 |                               | Number of saved files             | 1...65535   |   |  |                         |

\*2: Part of the saved file name, this number is automatically assigned.

\*3: Optional data to be appended to the saved file name.

## ■ CPU built-in Ethernet function specifications

| Item                        |                                       |            | L02CPU<br>L02CPU-P  | L06CPU<br>L06CPU-P | L26CPU<br>L26CPU-P | L26CPU-BT<br>L26CPU-PBT |
|-----------------------------|---------------------------------------|------------|---|--------------------|--------------------|-------------------------|
| Transmission specifications | Data transfer speed                   |            | 100 or 10 Mbps  |                    |                    |                         |
|                             | Communication mode                    |            | Full-duplex or half-duplex  |                    |                    |                         |
|                             | Transmission method                   |            | Base band   |                    |                    |                         |
|                             | Maximum distance between hub and node |            | 100 m   |                    |                    |                         |
|                             | Maximum number of nodes/connection    | 10BASE-T   | Cascade connection: Up to four  |                    |                    |                         |
|                             |                                       | 100BASE-TX | Cascade connection: Up to two   |                    |                    |                         |
| Number of connections       | TCP/IP                                |            | Total of 16 for socket communications, MELSOFT connections, and MC protocol.*1<br>One for FTP |                    |                    |                         |
|                             | UDP/IP                                |            |   |                    |                    |                         |
| Connection cable*2          | 10BASE-T                              |            | Ethernet cable of category 3 or higher (STP/UTP cable)*3                                      |                    |                    |                         |
|                             | 100BASE-TX                            |            | Ethernet cable of category 5 or higher (STP cable)  |                    |                    |                         |

\*1: Only the QnA-compatible 3E frame may be used.

\*2: Standard (straight type) cable. Also, when the CPU is connected directly with a GOT(HMI), a cross cable (category 5e or less) may be used.

\*3: The use of STP (Shielded Twisted Pair) cables is recommended in noisy environments.

## ■ Communication performance comparison (Comparison of LCPU with built-in Ethernet port and Ethernet interface module)

| Function/performance                        | LCPU with built-in Ethernet port | Ethernet interface module    |
|---|----------------------------------|------------------------------|
| Communication speed                         | 100 Mbps                         | 100 Mbps                     |
| MC protocol communication                   | ●*4                              | ●                            |
| Socket communication                        | ●*5                              | (Fixed buffer communication) |
| Communications using a random access buffer | —                                | ●                            |
| E-mail function                             | —                                | ●                            |
| Communications using data link instructions | —                                | ●                            |
| File transfer (FTP server) function         | ●*6                              | ●                            |
| Web function                                | —                                | ●                            |
| MELSOFT products and GOT(HMI) connection    | ●                                | ●                            |

\*4: QnA compatible 3E frame device memory access commands only. Refer to the relevant manual for details.

\*5: There are some differences regarding the fixed buffer communications function. Refer to the relevant manual for details.

\*6: The "quote cpuchg" command is not supported.

## ■ CPU built-in serial communication function specifications

| Item                                      | L02SCPU<br>L02SCPU-P   |
|---|--|
| Communication mode                        | Full duplex  |
| Synchronization method                    | Asynchronous method  |
| Transmission speed                        | 9.6 kbps, 19.2 kbps, 38.4 kbps, 57.6 kbps, 115.2 kbps  |
| Data format                               | <ul style="list-style-type: none"> <li>Start bits: 1</li> <li>Data bits: 8</li> <li>Parity bits: Odd number</li> <li>Stop bits: 1</li> </ul> |
| MC protocol format*7 (automatic judgment) | <ul style="list-style-type: none"> <li>Formats 4 (ASCII)</li> <li>Formats 5 (Binary)</li> </ul>  |
| Frame*7                                   | <ul style="list-style-type: none"> <li>QnA compatible 3C frame</li> <li>QnA compatible 4C frame</li> </ul>                                   |
| Transmission control                      | DTR/DSR control  |
| Transmission distance (Overall distance)  | Maximum 15 m   |

\*7: Information relevant to the MC protocol format and frame are shown below.

●: Supported —: Not supported

| Function                       |                         | Formats 4 | Formats 5 |
|--------------------------------|-------------------------|-----------|-----------|
| Communication with ASCII code  | QnA compatible 3C frame | ●         | —         |
|                                | QnA compatible 4C frame | ●         | —         |
| Communication with binary code | QnA compatible 4C frame | ●         | ●         |

## ■ How to read the product code

**L 26 □ CPU - P BT - SET**

① ② ③ ④ ⑤ ⑥

| Number | Item                       | Code  | Specification   |
|--------|----------------------------|-------|---|
| ①      | Program memory capacity    | 02    | 20K steps   |
|        |                            | 06    | 60K steps   |
|        |                            | 26    | 260K steps  |
| Number | Item                       | Code  | Specification   |
| ②      | Communication interface    | Blank | Built-in Ethernet model   |
|        |                            | S     | Built-in RS-232 model   |
| Number | Item                       | Code  | Specification   |
| ③      | Type of module             | CPU   | CPU module  |
| Number | Item                       | Code  | Specification   |
| ④      | Built-in I/O output format | Blank | Sink type   |
|        |                            | P     | Source type   |
| Number | Item                       | Code  | Specification   |
| ⑤      | Built-in CC-Link function  | Blank | —   |
|        |                            | BT    | ●   |
| Number | Item                       | Code  | Specification   |
| ⑥      | Product set                | Blank | —   |
|        |                            | SET   | Set includes a power supply module (L61P) and display unit (L6DSPU) |

## Branch/Extension Modules




### ■ Branch and extension module specifications

| Item                                | L6EXB [ Branch module ] | L6EXE [ Extension module ] |
|-------------------------------------|-------------------------|----------------------------|
| 5 V DC internal current consumption | 0.08 A                  | 0.08 A                     |
| Weight                              | 0.12 kg                 | 0.13 kg                    |

### ■ Extension cable specifications

| Item         | LC06E   | LC10E   | LC30E   |
|--------------|---------|---------|---------|
| Cable length | 0.6 m   | 1.0 m   | 3.0 m   |
| Weight       | 0.19 kg | 0.23 kg | 0.45 kg |

## Power Supply Modules

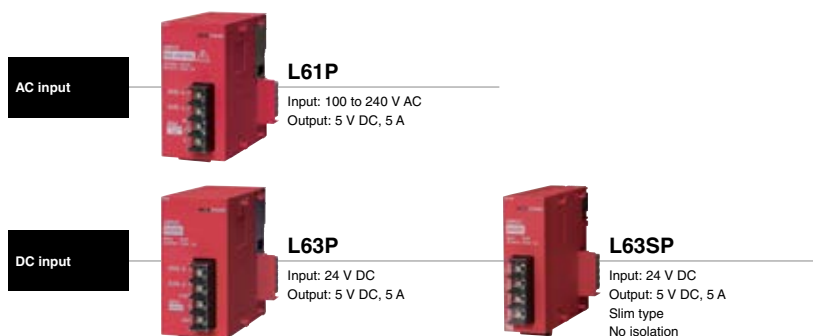

### ■ Power supply module specifications

| Item                                   | L61P  | L63P   | L63SP   |
|--|---|--|---------|
| Input power supply                     | 100...240 V AC (-15%...+10%)  | 24 V DC (-35%...+30%)  |         |
| Input frequency                        | 50/60 Hz (-5%...+5%)  | —  |         |
| Input voltage distortion               | ≤ 5%  | —  |         |
| Maximum input apparent power           | 130 VA  | —  |         |
| Maximum input power                    | —   | 45 W   |         |
| Inrush current                         | 20 A, ≤ 8 ms  | 100 A, ≤ 1 ms (24 V DC input)  |         |
| Rated output current (5 V DC)          | 5 A   |  |         |
| Overcurrent protection (5 V DC)        | ≥ 5.5 A   |  |         |
| Overvoltage protection                 | 5.5...6.5 V   |  |         |
| Efficiency                             | ≥ 70%   |  |         |
| Allowable momentary power failure time | ≤ 10 ms   | ≤ 10 ms (24 V DC input)  |         |
| Withstand voltage                      | 2300 V AC per minute<br>(altitude 0...2000 m)<br>Between the combined<br>"line input/LG terminals"<br>and the "FG terminal and output".   | 510 V AC per minute<br>(altitude 0...2000 m)<br>Between the combined<br>"line input/LG terminals"<br>and the "FG terminal and output". | —*1     |
| Insulation resistance                  | 10 MΩ or higher by 500 V DC insulation resistance tester<br>• Between the combined "line input/LG terminals" and the "FG terminal and output".<br>• The line input and LG terminals.<br>• The FG terminal and output. |  | —*1     |
| Weight                                 | 0.32 kg   | 0.29 kg  | 0.19 kg |

\*1: There is no isolation between the primary side 24 V DC and secondary side 5 V DC.



## RS-232 Adapter

RS-232  
adapter



### L6ADP-R2

Transmission speed: 115.2 kbps  
GOT(HMI) connection  
MELSOFT<sup>™</sup> connection

Predefined protocol support function  
Serial communication function

**MODBUS®**

\*1: Please refer to each MELSOFT product manual for details on the supported software.

### ■ RS-232 adapter specifications

| Item                                | Specification |
|-------------------------------------|---------------|
| Maximum data transmission speed     | 115.2 kbps    |
| 5 V DC internal current consumption | 0.02 A        |
| Weight                              | 0.10 kg       |

## RS-422/485 Adapter

RS-422/485  
adapter



### L6ADP-R4

Transmission speed: 115.2 kbps  
GOT(HMI) connection

Predefined protocol support function  
Serial Communication function

**MODBUS®**

### ■ RS-422/485 adapter specifications

| Item                                | Specification |
|-------------------------------------|---------------|
| Maximum data transmission speed     | 115.2 kbps    |
| 5 V DC internal current consumption | 0.15 A        |
| Weight                              | 0.12 kg       |

## END Cover with Error Terminal

END cover with  
error terminal



### L6EC-ET

Error output relay

### ■ END cover with error terminal specifications

| Item                                |                                  |            | Specification  |
|-------------------------------------|----------------------------------|------------|--|
| ERR. terminal                       | Rated switching voltage, current |            | 24 V DC 0.5 A  |
|                                     | Minimum switching load           |            | 5 V DC, 1 mA   |
|                                     | Response time                    | OFF to ON  | ≤ 10 ms  |
|                                     |                                  | ON to OFF  | ≤ 12 ms  |
|                                     | Life                             | Mechanical | ≥ 20 million times   |
|                                     |                                  | Electrical | Rated switching voltage/current: 10 million times or more        |
|                                     | Surge suppressor                 |            | —  |
|                                     | Fuse                             |            | —  |
| Applicable wire size                |                                  |            | 0.3...2.0 mm <sup>2</sup> (AWG22...14) (Twisted wire/Solid wire) |
| External interface                  |                                  |            | Spring clamp terminal block                                      |
| 5 V DC internal current consumption |                                  |            | 0.06 A   |
| Weight                              |                                  |            | 0.11 kg  |

## Display Unit

Display unit



### L6DSPU

### ■ Display Unit specifications

| Item                           | Specification   |
|--------------------------------|---|
| Number of displayed characters | 16 one-byte characters × 4 lines                            |
| Displayed characters           | • Alphanumeric (two-byte/one-byte character)                |
|                                | • Japanese character Katakana (two-byte/one-byte character) |
|                                | • Japanese character Hiragana (two-byte character)          |
|                                | • Chinese character (two-byte character)                    |
|                                | • Symbol (two-byte/one-byte character)                      |
| Language                       | Japanese/English  |
| Backlight                      | Green (normal), red (error)                                 |
| Weight                         | 0.03 kg   |

## Input Modules

### AC input



#### LX10

Number of inputs: 16 points  
100 to 120 V AC  
18-point terminal block



#### LX28

Number of inputs: 8 points  
100 to 240 V AC  
18-point terminal block

### DC input



#### LX40C6

Number of inputs: 16 points  
24 V DC  
18-point terminal block



#### LX41C4

Number of inputs: 32 points  
24 V DC  
40-pin connector



#### LX42C4

Number of inputs: 64 points  
24 V DC  
40-pin connector x2

## Output Modules

### Contact output



#### LY10R2

Number of outputs: 16 points  
24 V DC/240 V AC  
Rated switching current: 2 A/point  
18-point terminal block



#### LY18R2A

Number of outputs: 8 points  
(all points independent)  
24 V DC/240 V AC  
Rated switching current: 2 A/point  
18-point terminal block

### Triac output



#### LY20S6

Number of outputs: 16 points  
100 to 240 V AC  
Max. load current: 0.6 A/point  
18-point terminal block



#### LY28S1A

Number of outputs: 8 points  
(all points independent)  
100 to 240 V AC  
Max. load current: 1 A/point  
18-point terminal block

### Transistor output (Sink type)



#### LY40NT5P

Number of outputs: 16 points  
12 to 24 V DC  
Max. load current: 0.5 A/point  
Protection function  
18-point terminal block



#### LY41NT1P

Number of outputs: 32 points  
12 to 24 V DC  
Max. load current: 0.1 A/point  
Protection function  
40-pin connector



#### LY42NT1P

Number of outputs: 64 points  
12 to 24 V DC  
Max. load current: 0.1 A/point  
Protection function  
40-pin connector x2

### Transistor output (Source type)



#### LY40PT5P

Number of outputs: 16 points  
12 to 24 V DC  
Max. load current: 0.5 A/point  
Protection function  
18-point terminal block



#### LY41PT1P

Number of outputs: 32 points  
12 to 24 V DC  
Max. load current: 0.1 A/point  
Protection function  
40-pin connector



#### LY42PT1P

Number of outputs: 64 points  
12 to 24 V DC  
Max. load current: 0.1 A/point  
Protection function  
40-pin connector x2

## I/O Combined Modules

### DC input / Transistor output (Sink type)



#### LH42C4NT1P

Input specifications  
Number of inputs: 32 points  
24 V DC  
40-pin connector

Output specifications  
Number of outputs: 32 points  
12 to 24 V DC  
Max. load current: 0.1 A/point  
Protection function  
40-pin connector

### DC input / Transistor output (Source type)



#### LH42C4PT1P

Input specifications  
Number of inputs: 32 points  
24 V DC  
40-pin connector

Output specifications  
Number of outputs: 32 points  
12 to 24 V DC  
Max. load current: 0.1 A/point  
Protection function  
40-pin connector

## Spring clamp terminal block (push-in type): L6TE-18S

The screw terminal block of installed modules can be replaced with a push-in type spring clamp terminal block. This terminal block type helps to reduce the amount of wiring and maintenance time.

■ Push-in type for reduced wiring  
Easier to wire just by inserting into the terminal block.



■ Simple to confirm signal integrity  
Includes dedicated terminals for insertion of a test probe, for example.



## Input module specifications

### AC input module

| Item                                | LX10  | LX28  |
|-------------------------------------|---|---|
| Number of input points              | 16 points   | 8 points  |
| Rated input voltage, frequency      | 100...120 V AC<br>(+10%/-15%), 50/60Hz (±3 Hz)        | 100...240 V AC<br>(+10%/-15%), 50/60 Hz(±3 Hz)  |
| Input voltage distortion            | ≤ 5%  |   |
| Rated input current                 | 8.2 mA (100 V AC, 60 Hz),<br>6.8 mA (100 V AC, 50 Hz) | 16.4 mA (200 V AC, 60 Hz),<br>13.7 mA (200 V AC, 50 Hz),<br>8.2 mA (100 V AC, 60 Hz),<br>6.8 mA (100 V AC, 50 Hz) |
| Inrush current                      | Max. 200 mA ≤ 1 ms                                    | Max. 950 mA ≤ 1 ms  |
| ON voltage/ON current               | ≥ 80 V AC /≥ 5 mA (50 Hz, 60 Hz)                      |   |
| OFF voltage/OFF current             | ≤ 30 V AC /≤ 1.7 mA (50 Hz, 60 Hz)                    |   |
| Input resistance                    | 12.2 kΩ (60 Hz), 14.6 kΩ (50 Hz)                      |   |
| Response time                       | OFF to ON   | ≤ 15 ms (100 V AC 50 Hz, 60 Hz)<br>≤ 10 ms (200 V AC 50 Hz, 60 Hz)  |
|                                     | ON to OFF   | ≤ 20 ms (100 V AC 50 Hz, 60 Hz)<br>≤ 20 ms (100/200 V AC 50 Hz, 60 Hz)  |
| Common terminal arrangement         | 16 points/common                                      | 8 points/common   |
| Module size allocation              | 1   |   |
| Number of occupied I/O points       | 16 points (I/O assignment: input 16 points)           |   |
| External interface                  | 18-point terminal block                               |   |
| 5 V DC internal current consumption | 90 mA (TYP. all points ON)                            | 80 mA (TYP. all points ON)  |
| Weight                              | 0.17 kg   | 0.15 kg   |

### DC input module

| Item                                | LX40C6  | LX41C4   | LX42C4                                      |
|-------------------------------------|---|--|---|
| Number of input points              | 16 points   | 32 points  | 64 points                                   |
| Rated input voltage                 | 24 V DC (ripple rate: ≤ 5%) (allowable voltage range: 20.4...28.8 V DC) |  |   |
| Rated input current                 | 6.0 mA TYP. (at 24 V DC)  | 4.0 mA TYP. (at 24 V DC)   |   |
| ON voltage/ON current               | ≥ 15 V DC /≥ 4 mA   | ≥ 19 V DC/≥ 3 mA   |   |
| OFF voltage/OFF current             | ≤ 8 V DC /≤ 2 mA  | ≤ 9 V DC /≤ 1.7 mA   |   |
| Input resistance                    | 3.8 kΩ  | 5.7 kΩ   |   |
| Response time                       | OFF to ON   | 1 ms, 5 ms, 10 ms, 20 ms, 70 ms or less<br>Initial setting is 10 ms. |   |
|                                     | ON to OFF   |  |   |
| Common terminal arrangement         | 16 points/common  | 32 points/common   |   |
| Module size allocation              | 1   |  |   |
| Number of occupied I/O points       | 16 points (I/O allocation: input 16 points)                             | 32 points (I/O assignment: input 32 points)                          | 64 points (I/O allocation: input 64 points) |
| External interface                  | 18-point terminal block   | 40-pin connector   | 40-pin connector × 2                        |
| 5 V DC internal current consumption | 90 mA (TYP. all points ON)  | 100 mA (TYP. all points ON)  | 120 mA (TYP. all points ON)                 |
| Weight                              | 0.15 kg   | 0.11 kg  | 0.12 kg                                     |

## Output module specifications

### Contact output module

| Item  |                    | LY10R2  | LY18R2A   |
|---|--------------------|---|---|
| Number of output points                     |                    | 16 points   | 8 points  |
| Rated switching voltage, current            |                    | 24 V DC 2 A (resistive load)/point, 8 A/common<br>240 V AC 2 A (COSφ=1)/point, 8 A/common | 24 V DC 2 A (resistive load)/point, 8 A/module<br>240 V AC 2 A (COSφ=1)/point, 8 A/module |
| Minimum switching load                      |                    | 5 V DC 1 mA   |   |
| Maximum switching load                      |                    | 264 V AC 125 V DC   |   |
| Response time                               | OFF to ON          | ≤ 10 ms   |   |
|   | ON to OFF          | ≤ 12 ms   |   |
| Life  | Mechanical         | ≥ 20 million times  |   |
|   | Electrical         | Usage environment   | Switching life  |
|   |                    | Rated switching voltage/current, rated load   | 100 thousand times  |
|   |                    | 200 V AC 1.5 A, 240 V AC 1 A (COSφ = 0.7)   | 100 thousand times  |
|   |                    | 200 V AC 0.4 A, 240 V AC 0.3 A (COSφ = 0.7)   | 300 thousand times  |
|   |                    | 200 V AC 1 A, 240 V AC 0.5 A (COSφ = 0.35)  | 100 thousand times  |
|   |                    | 200 V AC 0.3 A, 240 V AC 0.15 A (COSφ = 0.35)   | 300 thousand times  |
|   |                    | 24 V DC 1 A, 100 V DC 0.1 A (L/R = 7 ms)  | 100 thousand times  |
| 24 V DC 0.3 A, 100 V DC 0.03 A (L/R = 7 ms) | 300 thousand times |   |   |
| Maximum switching frequency                 |                    | 3600 times/hour   |   |
| Surge suppressor                            |                    | —   |   |
| Fuse  | —                  | (a fuse is recommended to be installed for each external wiring point)                    |   |
| Common terminal arrangement                 |                    | 16 points/common  | No common (all points independent)  |
| Module size allocation                      |                    | 1   |   |
| Number of occupied I/O points               |                    | 16 points (I/O assignment: 16 output points)  |   |
| External interface                          |                    | 18-point terminal block   |   |
| 5 V DC internal current consumption         |                    | 460 mA (TYP. all points ON)   | 260 mA(TYP.all points ON)   |
| Weight                                      |                    | 0.21 kg   | 0.18 kg   |

## ■ Output module specifications

### Triac output

| Item                                |           | LY20S6  | LY28S1A                            |
|-------------------------------------|-----------|---|------------------------------------|
| Number of output points             |           | 16 points   | 8 points                           |
| Rated load voltage, frequency       |           | 100...240 V AC (+10%/-15%), 50/60 Hz(±3 Hz)                     |                                    |
| Maximum load current                |           | 0.6 A/point, 4.8 A/common                                       | 1 A/point, 8 A/module              |
| Load voltage distortion ratio       |           | ≤ 5%  |                                    |
| Maximum load voltage                |           | 264 V AC  |                                    |
| Minimum load voltage/current        |           | 24 V AC/100 mA, 100 V AC/25 mA, 240 V AC/25 mA                  |                                    |
| Maximum inrush current              |           | ≤ 20 A/cycle  |                                    |
| Leakage current at OFF              |           | ≤ 3 mA (at 240 V, 60 Hz), ≤ 1.5 mA (at 120 V, 60 Hz)            |                                    |
| Maximum voltage drop at ON          |           | ≤ 1.5 V (at load current of 0.6 A)                              |                                    |
| Response time                       | OFF to ON | Total of 1 ms and 0.5 cycles or less                            |                                    |
|                                     | ON to OFF |   |                                    |
| Surge suppressor                    |           | CR absorber   |                                    |
| Fuse                                |           | None (Attaching a fuse to each external wiring is recommended.) |                                    |
| Common terminal arrangement         |           | 16 points/common  | No common (all points independent) |
| Module size allocation              |           | 1   |                                    |
| Number of occupied I/O points       |           | 16 points (I/O assignment: output 16 points)                    |                                    |
| External interface                  |           | 18-point terminal block   |                                    |
| 5 V DC internal current consumption |           | 300 mA (TYP. all points ON)                                     | 200 mA (TYP. all points ON)        |
| Weight                              |           | 0.22 kg   | 0.19 kg                            |

### Transistor output (Sink type)

| Item                                |                     | LY40NT5P   | LY41NT1P  | LY42NT1P  |
|-------------------------------------|---------------------|--|---|---|
| Number of output points             |                     | 16 points  | 32 points   | 64 points                                       |
| Rated load voltage                  |                     | 10.2...28.8 V DC   |   |   |
| Maximum load current                |                     | 0.5 A/point, 5 A/common  | 0.1 A/point, 2 A/common   |   |
| Maximum inrush current              |                     | Current is limited by the overload protection function.  |   |   |
| Leakage current at OFF              |                     | ≤ 0.1 mA   |   |   |
| Maximum voltage drop at ON          |                     | 0.2 V DC(TYP.) 0.5 A,<br>0.3 V DC(MAX.) 0.5 A  | 0.1 V DC (TYP.) 0.1 A,<br>0.2 V DC (MAX.) 0.1 A   |   |
| Response time                       | OFF to ON           | ≤ 0.5 ms   |   |   |
|                                     | ON to OFF           |  |   |   |
| Surge suppressor                    |                     | Zener diode  |   |   |
| Fuse                                |                     | —  |   |   |
| External power supply               | Voltage             | 12/24 V DC (ripple rate: ≤ 5%) (allowable voltage range: 10.2...28.8 V DC)   |   |   |
|                                     | Current             | 9 mA (at 24 V DC)/common   | 13 mA (at 24 V DC)/common   | 9 mA (at 24 V DC)/common                        |
| Common terminal arrangement         |                     | 16 points/common   | 32 points/common  |   |
| Module size allocation              |                     | 1  |   |   |
| Number of occupied I/O points       |                     | 16 points<br>(I/O assignment: 16 output points)  | 32 points<br>(I/O assignment: 32 output points)   | 64 points<br>(I/O assignment: 64 output points) |
| Protection function                 | Overload protection | Limited current when detecting overcurrent (overload protection):<br>1.5...3.5 A/point.<br>Activated in increments of 1 point. | Limited current when detecting overcurrent (overload protection): 1...3 A/point.<br>Activated in increments of 1 point. |   |
|                                     | Overheat protection | Activated in increments of 1 point   |   |   |
| External interface                  |                     | 18-point terminal block  | 40-pin connector  | 40-pin connector x2                             |
| 5 V DC internal current consumption |                     | 100 mA (TYP. all points ON)  | 140 mA (TYP. all points ON)   | 190 mA (TYP. all points ON)                     |
| Weight                              |                     | 0.15 kg  | 0.11 kg   | 0.12 kg   |

### Transistor output (Source type)

| Item                                |                     | LY40PT5P   | LY41PT1P   | LY42PT1P  |
|-------------------------------------|---------------------|--|--|---|
| Number of output points             |                     | 16 points  | 32 points  | 64 points                                       |
| Rated load voltage                  |                     | 10.2...28.8 V DC   |  |   |
| Maximum load current                |                     | 0.5 A/point, 5 A/common  | 0.1 A/point, 2 A/common  |   |
| Maximum inrush current              |                     | Current is limited by the overload protection function.                      |  |   |
| Leakage current at OFF              |                     | ≤ 0.1 mA   |  |   |
| Maximum voltage drop at ON          |                     | 0.2 V DC(TYP.)0.5 A,<br>0.3 V DC(MAX.)0.5 A                                  | 0.1 V DC (TYP.) 0.1 A,<br>0.2 V DC (MAX.) 0.1 A  |   |
| Response time                       | OFF to ON           | ≤ 0.5 ms   |  |   |
|                                     | ON to OFF           |  |  |   |
| Surge suppressor                    |                     | ≤ 1 ms (rated load, resistance load)   |  |   |
| Fuse                                |                     | Zener diode  |  |   |
| Fuse                                |                     | —  |  |   |
| External power supply               | Voltage             | 12/24 V DC (ripple rate: ≤ 5%) (allowable voltage range: 10.2...28.8 V DC)   |  |   |
|                                     | Current             | 17 mA (at 24 V DC)/common  | 20 mA (at 24 V DC)/common  |   |
| Common terminal arrangement         |                     | 16 points/common   | 32 points/common   |   |
| Module size allocation              |                     | 1  |  |   |
| Number of occupied I/O points       |                     | 16 points<br>(I/O assignment: 16 output points)                              | 32 points<br>(I/O assignment: 32 output points)  | 64 points<br>(I/O assignment: 64 output points) |
| Protection function                 | Overload protection | Overcurrent detection: ≥ 1.5 A/point.<br>Activated in increments of 1 point. | Limited current when detecting overcurrent (overload protection):<br>1...3 A/point.<br>Activated in increments of 1 point. |   |
|                                     | Overheat protection | Activated in increments of 1 point.  | Activated in increments of 2 points.   |   |
| External interface                  |                     | 18-point terminal block  | 40-pin connector   | 40-pin connector x2                             |
| 5 V DC internal current consumption |                     | 100 mA (TYP. all points ON)  | 140 mA (TYP. all points ON)  | 190 mA (TYP. all points ON)                     |
| Weight                              |                     | 0.15 kg  | 0.11 kg  | 0.12 kg   |

## ■ I/O combined module specifications DC input/transistor output combined module

| Item                                |                     | LH42C4NT1P  | LH42C4PT1P                                      |
|-------------------------------------|---------------------|---|---|
| ■ Input specifications              |                     |   |   |
| Number of input points              |                     | 32 points   |   |
| Rated input voltage                 |                     | 24 V DC (ripple rate: ≤ 5%) (allowable voltage range: 20.4...28.8 V DC)   |   |
| Rated input current                 |                     | 4.0 mA TYP. (at 24 V DC)  |   |
| Input ON voltage/ON current         |                     | ≥ 19 V DC/≥ 3 mA  |   |
| Input OFF voltage/OFF current       |                     | ≤ 9 V DC/≤ 1.7 mA   |   |
| Input resistance                    |                     | 5.7 kΩ  |   |
| Input response time                 | OFF to ON           | 1 ms, 5 ms, 10 ms, 20 ms, 70 ms or less<br>(Initial setting is 10 ms)   |   |
|                                     | ON to OFF           |   |   |
| Input common terminal arrangement   |                     | 32 points/common  |   |
| ■ Output specifications             |                     |   |   |
| Output format                       |                     | Transistor output combined module (Sink type)   | Transistor output combined module (Source type) |
| Number of output points             |                     | 32 points   |   |
| Rated load voltage                  |                     | 10.2...28.8 V DC  |   |
| Maximum load current                |                     | 0.1 A/point, 2 A/common   |   |
| Maximum inrush current              |                     | Current is limited by the overload protection function.   |   |
| Leakage current at OFF              |                     | ≤ 0.1 mA  |   |
| Maximum voltage drop at ON          |                     | 0.1 V DC (TYP.) 0.1 A,<br>0.2 V DC (MAX.) 0.1 A   |   |
| Output response time                | OFF to ON           | ≤ 0.5 ms  |   |
|                                     | ON to OFF           |   |   |
|                                     |                     | ≤ 1 ms (rated load, resistance load)  |   |
| Surge suppressor                    |                     | Zener diode   |   |
| Fuse                                |                     | —   |   |
| Protection function                 | Overload protection | Limited current when detecting overcurrent (overload protection): 1...3 A/point, activated in increments of 1 point<br>Activated in increments of 1 point |   |
|                                     | Overheat protection |   |   |
|                                     |                     | Activated in increments of 2 points   |   |
| Output common terminal arrangement  |                     | 32 points/common  |   |
| ■ Common specifications             |                     |   |   |
| External power supply               | Voltage             | 12/24 V DC (ripple rate: ≤ 5%) (allowable voltage range: 10.2...28.8 V DC)  |   |
|                                     | Current             | 9 mA (at 24 V DC)/common  | 20 mA (at 24 V DC)/common                       |
| Module size allocation              |                     | 1   |   |
| Number of occupied I/O points       |                     | 32 points (I/O assignment: input/output 32 points)  |   |
| External interface                  |                     | 40-pin connector x2   |   |
| 5 V DC internal current consumption |                     | 160 mA (TYP. all points ON)   | 150 mA (TYP. all points ON)                     |
| Weight                              |                     | 0.12 kg   |   |

## ■ How to read the product code

• For input module or output module

**L Y 4 0 NT 5 P**

① ② ③ ④ ⑤ ⑥

• For I/O combined module

**L H 4 2 C4 NT1 P**

① ② ③ ④ ⑤ ④ ⑤ ⑥

| Number | Item                  | Code  | Specification                              |         |                       |                |              |
|--------|-----------------------|-------|--|---------|-----------------------|----------------|--------------|
| ①      | Module type           | X     | Input                                      |         |                       |                |              |
|        |                       | Y     | Output                                     |         |                       |                |              |
|        |                       | H     | I/O combined                               |         |                       |                |              |
| Number | Item                  | Code  | Input specifications                       |         | Output specifications |                |              |
| ②      | Voltage specification | 1     | 100...120 V AC                             | —       | 24 V DC/240 V AC      | —              | —            |
|        |                       | 2     | 100...240 V AC                             | —       | —                     | 100...240 V AC | —            |
|        |                       | 4     | —  | 24 V DC | —                     | —              | 12...24 V DC |
| Number | Item                  | Code  | Specification                              |         |                       |                |              |
| ③      | I/O points            | 0     | 16 points                                  |         |                       |                |              |
|        |                       | 1     | 32 points                                  |         |                       |                |              |
|        |                       | 2     | 64 points                                  |         |                       |                |              |
|        |                       | 8     | 8 points                                   |         |                       |                |              |
| Number | Item                  | Code  | Specification                              |         |                       |                |              |
| ④      | I/O type              | Blank | AC input                                   |         |                       |                |              |
|        |                       | C     | DC input (positive/negative shared common) |         |                       |                |              |
|        |                       | NT    | Transistor output module (Sink type)       |         |                       |                |              |
|        |                       | PT    | Transistor output module (Source type)     |         |                       |                |              |
|        |                       | R     | Contact output                             |         |                       |                |              |
|        |                       | S     | Triac output                               |         |                       |                |              |
| Number | Item                  | Code  | Input specifications                       |         | Output specifications |                |              |
| ⑤      | Current specification | 1     | —  | —       | —                     | 1 A            | 0.1 A        |
|        |                       | 2     | —  | —       | 2 A                   | —              | —            |
|        |                       | 4     | —  | 4 mA    | —                     | —              | —            |
|        |                       | 5     | —  | —       | —                     | —              | 0.5 A        |
|        |                       | 6     | —  | 6 mA    | —                     | 0.6 A          | —            |
| Number | Item                  | Code  | Specification                              |         |                       |                |              |
| ⑥      | Extra specifications  | P     | Includes protection function               |         |                       |                |              |
|        |                       | A     | Independent common                         |         |                       |                |              |



## Multiple Input (Voltage/Current/Temperature) Module

Channel  
isolated  
multiple input



### L60MD4-G

Number of inputs: 4 channels  
Input voltage: -10 to 10 V DC  
Input current: 0 to 20 mA DC  
Input micro voltage: -100 to 100 mV  
Input thermocouple: K, J, T, E, N, R, S, B, U, L, PL II, W5Re/W26Re  
Input RTD: Pt1000, Pt100, JPt100, Pt50  
Conversion speed: 50 ms/channel  
Resolution  
Voltage/Current/micro voltage: 1/20000  
Thermocouple: B, R, S, N, PL II, W5Re/W26Re: 0.3°C,  
K, E, J, T, U, L: 0.1°C  
RTD: Pt100, JPt100: 0.03°C/0.1°C,  
Pt1000, Pt50: 0.1°C

## Analog Input Modules

Analog Input



### L60AD4

Number of inputs: 4 channels  
Input voltage: -10 to 10 V DC  
Input current: 0 to 20 mA DC  
Conversion speed: 20 µs/channel  
Resolution: 1/20000



### L60ADVL8

Number of inputs: 8 channels  
Input voltage: -10 to 10 V DC  
Conversion speed: 1 ms/channel  
Resolution: 1/16000



### L60ADIL8

Number of inputs: 8 channels  
Input current: 0 to 20 mA DC  
Conversion speed: 1 ms/channel  
Resolution: 1/8000

Dual channel  
Isolation Analog  
Input



### L60AD4-2GH

Number of inputs: 4 channels  
Input voltage: -10 to 10 V DC  
Input current: 0 to 20 mA DC  
Conversion speed: 40 µs/2 channels  
Resolution: 1/32000

## Analog Output Modules

Analog Output



### L60DA4

Number of outputs: 4 channels  
Output voltage: -10 to 10 V DC  
Output current: 0 to 20 mA DC  
Conversion speed: 20 µs/channel  
Resolution: 1/20000



### L60DAVL8 NEW

Number of outputs: 8 channels  
Output voltage: -10 to 10 V DC  
Conversion speed: 200 µs/channel  
Resolution: 1/16000



### L60DAIL8 NEW

Number of outputs: 8 channels  
Output current: 0 to 20 mA DC  
Conversion speed: 200 µs/channel  
Resolution: 1/8000

## Analog I/O Module

Analog I/O



### L60AD2DA2

Analog input specifications  
Number of inputs: 2 channels  
Input voltage: -10 to 10 V DC  
Input current: 0 to 20 mA DC  
Conversion speed: 80 µs/channel  
Resolution: 1/12000

Analog output specifications  
Number of outputs: 2 channels  
Output voltage: -10 to 10 V DC  
Output current: 0 to 20 mA DC  
Conversion speed: 80 µs/channel  
Resolution: 1/12000

## Temperature Input Module

RTD input



### L60RD8

Number of inputs: 8 channels  
Input RTD: Pt1000, Pt100 (JIS C 1604–2013), JPt100 (JIS C 1604–1981), Pt50 (JIS C 1604–1981), Ni500 (DIN 43760 1987), Ni120 (DIN 43760 1987), Ni100 (DIN 43760 1987), Cu100 (GOST 6651-2009,  $\alpha=0.00428$ ), Cu50 (GOST 6651-2009,  $\alpha=0.00428$ )  
Conversion speed: 40 ms/ch  
Resolution: 0.1°C

### Multiple/analog/temperature input features

| Function   |                         |                   | Multiple input<br>(voltage/current/<br>temperature)<br>module | Analog input module |                 |                 |                 | Analog I/O<br>module | Temperature<br>input module |
|--|-------------------------|-------------------|---|---------------------|-----------------|-----------------|-----------------|----------------------|-----------------------------|
|  |                         |                   | L60MD4-G  | L60AD4              | L60ADVL8        | L60ADIL8        | L60AD4-2GH      | L60AD2DA2            | L60RD8                      |
| Channel isolation  |                         |                   | ●   | —                   | —               | —               | ● <sup>*1</sup> | —                    | —                           |
| AD conversion method   | Sampling processing     |                   | ●   | ●                   | ●               | ●               | ●               | ●                    | ●                           |
|  | Averaging<br>processing | Time<br>average   | ●   | ●                   | ●               | ●               | ●               | ●                    | ●                           |
|  |                         | Count<br>average  | ●   | ●                   | ●               | ●               | ●               | ●                    | ●                           |
|  |                         | Moving<br>average | ●   | ●                   | ●               | ●               | ●               | ●                    | ●                           |
| Time lag filter function   |                         |                   | —   | —                   | —               | —               | ●               | —                    |                             |
| Digital filtering function   |                         |                   | —   | —                   | —               | —               | ●               | —                    |                             |
| Conversion speed switch function   |                         |                   | —   | ●                   | —               | —               | —               | —                    | —                           |
| Input range extended mode function   |                         |                   | ●   | ● <sup>*2</sup>     | ●               | ●               | ●               | ●                    | —                           |
| Maximum value/minimum value hold function                                      |                         |                   | ●   | ●                   | ●               | ●               | ●               | ●                    | ●                           |
| Disconnection detection function   |                         |                   | ●   | —                   | —               | —               | —               | —                    | ●                           |
| Input signal error detection function  |                         |                   | ●   | ●                   | ●               | ●               | ●               | ●                    | —                           |
| Input signal error detection extension function                                |                         |                   | —   | ● <sup>*2</sup>     | ●               | ●               | —               | —                    | —                           |
| Warning output function  | Process alarm           |                   | ●   | ●                   | ●               | ●               | ●               | —                    | ●                           |
|  | Rate alarm              |                   | ●   | —                   | —               | —               | ●               | —                    | ●                           |
| Scaling function   |                         |                   | ●   | ●                   | ●               | ●               | ●               | ●                    | ●                           |
| 2-point sensor compensation function   |                         |                   | —   | —                   | —               | —               | —               | —                    | ●                           |
| Shift function   |                         |                   | — <sup>*3</sup>   | ● <sup>*2</sup>     | — <sup>*3</sup> | — <sup>*3</sup> | ●               | — <sup>*3</sup>      | ●                           |
| Digital clipping function  |                         |                   | — <sup>*3</sup>   | ●                   | — <sup>*3</sup> | — <sup>*3</sup> | ●               | — <sup>*3</sup>      | —                           |
| Difference conversion function   |                         |                   | — <sup>*3</sup>   | ● <sup>*2</sup>     | — <sup>*3</sup> | — <sup>*3</sup> | ●               | — <sup>*3</sup>      | —                           |
| Logging function   |                         |                   | — <sup>*4</sup>   | ● <sup>*2</sup>     | — <sup>*4</sup> | — <sup>*4</sup> | ●               | ●                    | — <sup>*4</sup>             |
| Flow amount integration function   |                         |                   | —   | ● <sup>*2</sup>     | —               | —               | —               | —                    | —                           |
| Trigger conversion function  |                         |                   | —   | —                   | —               | —               | ●               | —                    | —                           |
| Variable arithmetic function   |                         |                   | —   | —                   | —               | —               | —               | ● <sup>*5</sup>      | —                           |
| Variable conversion characteristics function                                   |                         |                   | —   | —                   | —               | —               | —               | ● <sup>*5</sup>      | —                           |
| Variable conversion characteristics function +<br>variable arithmetic function |                         |                   | —   | —                   | —               | —               | —               | ● <sup>*5</sup>      | —                           |

### Analog output features

| Function   |                                     | Analog output module |                     |                     | Analog I/O module |
|--|-------------------------------------|----------------------|---------------------|---------------------|-------------------|
|  |                                     | L60DA4               | L60DAVL8 <b>NEW</b> | L60DAIL8 <b>NEW</b> | L60AD2DA2         |
| Analog output HOLD/CLEAR function  |                                     | ●                    | ●                   | ●                   | ●                 |
| Scaling function   |                                     | ●                    | ●                   | ●                   | ●                 |
| Warning output<br>function   | Process alarm                       | ●                    | ●                   | ●                   | ●                 |
| Wave output function   |                                     | ● <sup>*6</sup>      | ●                   | ●                   | ●                 |
|  | Wave output step action<br>function | ● <sup>*6</sup>      | ●                   | ●                   | ●                 |
| Variable arithmetic function   |                                     | —                    | —                   | —                   | ● <sup>*5</sup>   |
| Variable conversion characteristics function                                   |                                     | —                    | —                   | —                   | ● <sup>*5</sup>   |
| Variable conversion characteristics function +<br>variable arithmetic function |                                     | —                    | —                   | —                   | ● <sup>*5</sup>   |

\*1: Every two channels are isolated. (CH1 and CH2 are isolated from CH3 and CH4).

\*2: Supported by models whose first five serial number digits are "13041" or later.

\*3: Please use function blocks (FB) for the shift function, digital clipping function, and difference conversion function. The function blocks (FB) can be downloaded for free from the MELSOFT Library on the Mitsubishi Electric FA site.

\*4: For logging, please use the data logging function of the CPU module.

\*5: Supported by models whose first five serial number digits are "17042" or later.

\*6: Supported by models whose first five serial number digits are "14041" or later.



## Easily and finely adjust the system startup time with the shift function

### Shift function

Using this function, the set shifting amount to conversion value can be added (shifted) to the digital output value. When the shifting amount to conversion value is changed, it is reflected to the scaling value (digital operation value) in real time. Therefore, fine adjustment can be easily performed when the system starts.

#### For L60AD4

| ■ Before adjustment                      |   |
|--|---|
| Input voltage (V)                        | Digital output value                    |
| 0  | -10                                     |
| 5  | 19990                                   |
| Shifting amount to conversion value: +10 |   |
| ■ After adjustment                       |   |
| Input voltage (V)                        | Scaling value (digital operation value) |
| 0  | 0                                       |
| 5  | 20000                                   |

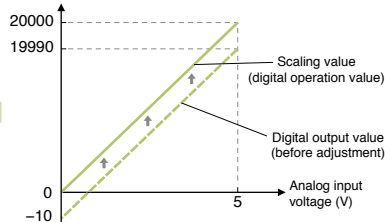


## Reduce the time taken for programming

### Scaling function

The scaling function converts values directly to easy-to-understand units without requiring any programming. Since a separate conversion program is not required, the number of overall programming steps can be reduced.

#### Scaling settings example (L60AD4)

Normally an analog input of 4 to 20 mA is converted to a digital value from 0 to 20000. Using the scaling feature, the same input can result in a digital value of  $\pm 20000$ .

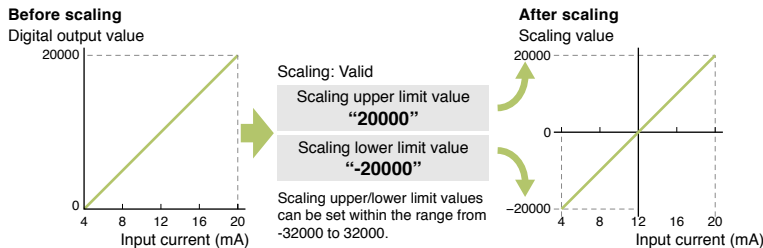

| Input current (mA) | Digital output value | Scaling value |
|--------------------|----------------------|---------------|
| 4                  | 0                    | -20000        |
| 8                  | 5000                 | -10000        |
| 12                 | 10000                | 0             |
| 16                 | 15000                | 10000         |
| 20                 | 20000                | 20000         |

### Digital filtering function

This function eliminates unnecessary frequency elements with simple parameter settings. Select from low pass filter, high pass filter or band pass filter.

Programming steps can be further reduced as extra ladder code is not required to achieve the filter processing. The filtered A/D conversion program is available at the same time as conversion completion, reducing the overall conversion to filter process time.

**Measurement of flatness**  
Eliminate parts with different flatness.

■ When low pass is processed with ladder  
When requiring a filter processing program, more than 300 lines are necessary.

Not required when using digital filter function

■ Total time when processing digital filter with ladder

Processing time is reduced by using the digital filter function

### First-delay filter function

The first-delay filter function constant outputs a digital value which filters out (smooths) the excessive noise.

## Log data for up to 10,000 points

### Logging function

Data is continuously collected at the set cycle and stored in the buffer memory.


Data stored in the buffer memory can be used for debugging, and to periodically confirm data variations.

| Item                         | Description   |                       |                    |
|------------------------------|---|-----------------------|--------------------|
|                              | L60AD4  | L60AD4-2GH            | L60AD2DA2          |
| Collectable points           | 10000 points/channel  |                       |                    |
| Collectable data             | Digital output value or scaling value (digital operation value) |                       |                    |
| Logging cycle*1              | 80...32767 $\mu$ s  | 40...32767 $\mu$ s    | 80...32767 $\mu$ s |
|                              | 1...32767 ms  | 1...32767 ms          | 1...32767 ms       |
|                              | 1...3600 s  | 1...3600 s            | 1...3600 s         |
| Conversion speed             | 80 $\mu$ s, or 1 ms   | 40 $\mu$ s/2 channels | 80 $\mu$ s         |
| Level trigger condition      | Above, Below, Pass Through                                      |                       |                    |
| Logging points after trigger | 1...10000   |                       |                    |

\*1: The actual logging cycle is "an integral multiple of the conversion cycle of each A/D conversion method".  
Ex.) When using the sampling processing: Conversion cycle = conversion speed  $\times$  number of channels in use.

The logging data can be analyzed with the GX LogViewer.

### When an error is detected in the digital value:

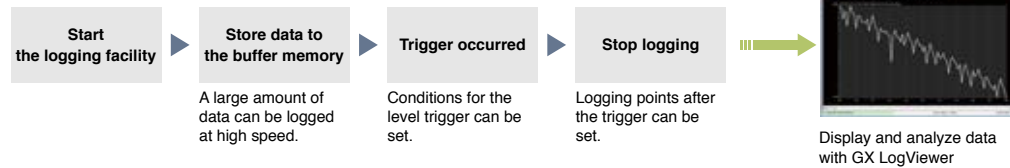


Logging data can be transferred to the CPU device memory while still logging.

Logging and data transmission can be executed simultaneously so the next logging session can be started right away.

### Logging for 10,000 points and greater

When logging of 1001 - 2000 points of data commences, the first 1000 points (1 - 1000) are stored into the CPU device memory. By storing every 1000 points of data in the CPU, overall logging of total data larger than 1000 points can be logged.

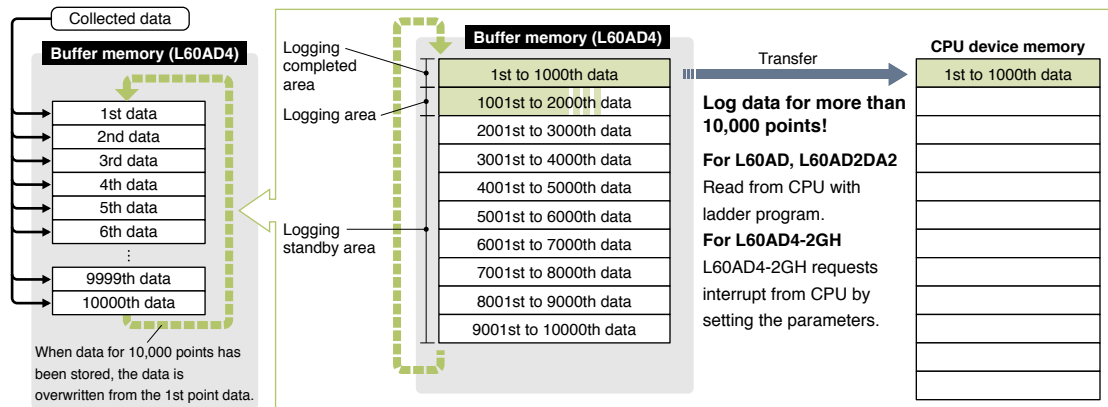


## Easily measure part thicknesses!

### Difference conversion function

When the difference conversion starts, the scaling value (digital operation value) at that time is determined as the difference conversion reference value. The value acquired by subtracting the difference conversion reference value from the scaling value (digital operation value) is stored as the scaling value (digital operation value) after difference conversion.

### For L60AD4

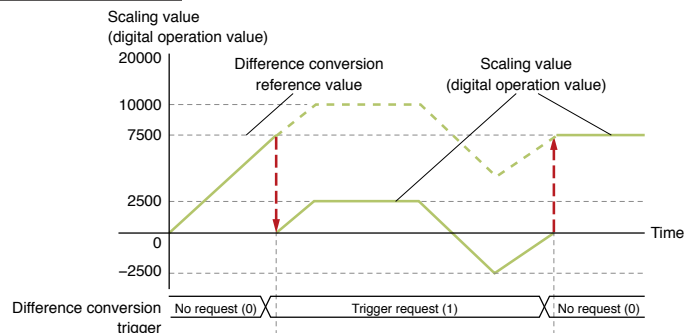

$$\text{Scaling value (digital operation value) after difference conversion} = \text{Scaling value (digital operation value)} - \text{Difference conversion reference value}$$

## Extend the detection method according to applications

### Input signal error detection extension function

Using this function, the detection method of the input signal error detection function can be extended. Use this function to detect an input signal error only at the lower or upper limit, or to execute the disconnection detection.

### Input range extension function


The input range can be extended. By combining this function with the input signal error detection function, simple disconnection detection can be executed.

## Connected devices monitoring alarm

### Warning output function


#### ■ Process alarm

Outputs an alarm when the digital output value enters a preset alarm range.

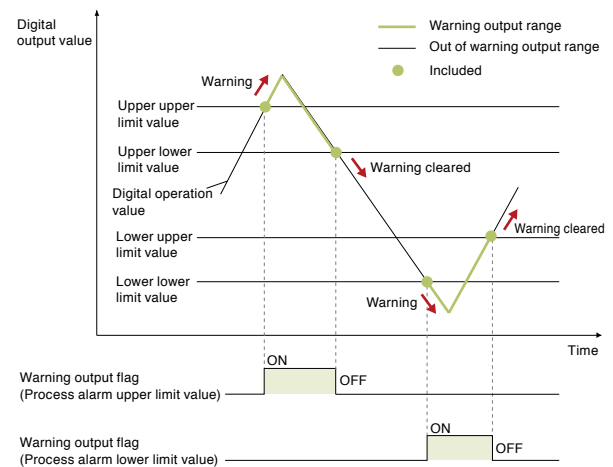

#### ■ Rate alarm

An alarm is generated if the digital output value's variation rate is larger than the rate alarm upper limit value, or if it is smaller than the rate alarm lower limit value.

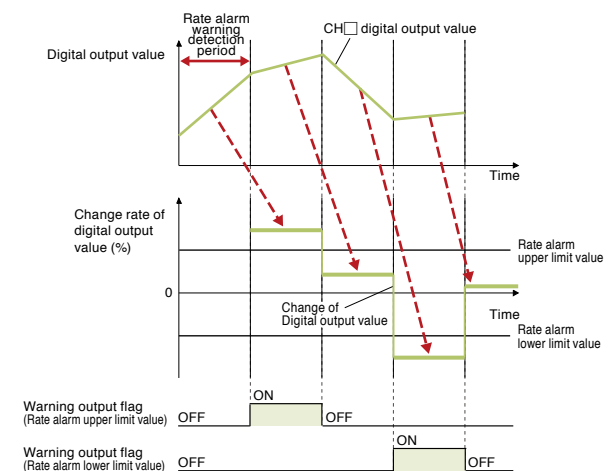


## Noise isolation for smoother system operation

L60AD4-2GH

### Channel isolation

Each channel is isolated preventing any noise interference between channels resulting in more stable measurements.

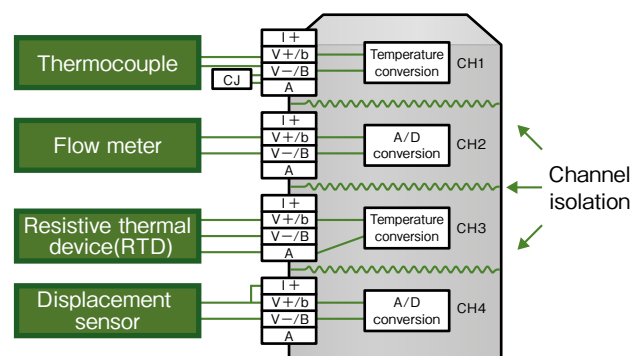



## A/D variable conversion timing


### Trigger conversion function

A/D conversion is processed at the rising edge of the trigger position timing.

This function enables easier use of the converter and enhances the overall program performance.

There are two types of trigger conversion request:

“External trigger conversion request (external input terminal)” or “internal trigger conversion request (buffer memory)”.

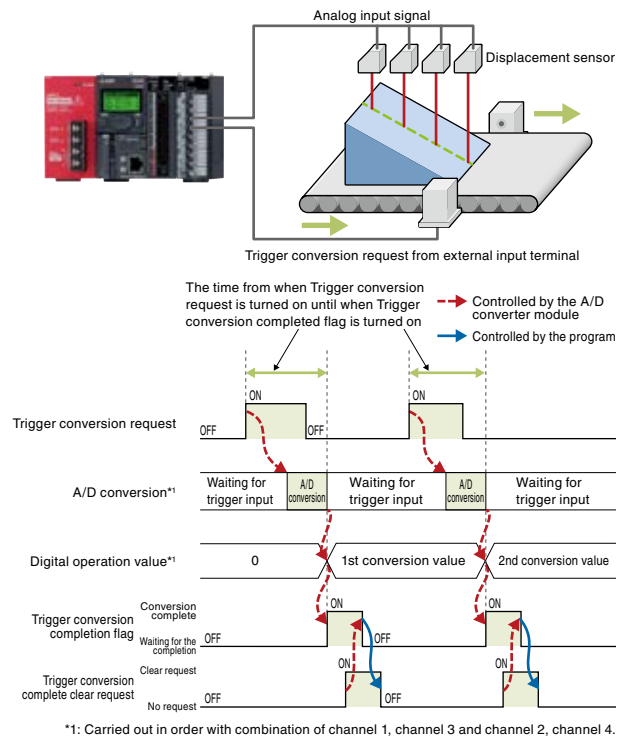

## Quickly calculate and record flow amount


### Flow amount integration function

This function performs the A/D conversion of analog input value (voltage or current) from a flow meter and others, and integrates the scaling value (digital operation value) by every integration cycle. In this function, integral processing is performed regarding the scaling value (digital operation value) as the instantaneous flow amount.

#### ■ Concept of integral processing

With this function, integral processing is performed using the following formula.

$$\text{Integrated flow amount} = \left( \text{Instantaneous flow amount} \times \frac{\Delta T}{T} \times \text{Unit scaling} \right) + \text{Previous amount}$$

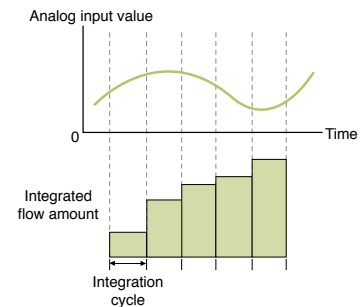

| Item  | Description   |  |  |        |    |   |      |      |     |       |      |   |         |
|---|---|--|--|--------|----|---|------|------|-----|-------|------|---|---------|
| Integrated flow amount  | Result of integral processing   |  |  |        |    |   |      |      |     |       |      |   |         |
| Instantaneous flow amount   | Instantaneous flow amount value output in analog from flow meter  |  |  |        |    |   |      |      |     |       |      |   |         |
| $\Delta T$  | Integration cycle (ms)  |  |  |        |    |   |      |      |     |       |      |   |         |
| T   | Conversion value to convert time unit of instantaneous flow amount to ms unit   |  |  |        |    |   |      |      |     |       |      |   |         |
|   | <table><tr><th>Range of flow meter</th><th>Setting value to specify flow amount time unit</th><th>T (ms)</th></tr><tr><td>/s</td><td>0</td><td>1000</td></tr><tr><td>/min</td><td>1</td><td>60000</td></tr><tr><td>/h</td><td>2</td><td>3600000</td></tr></table> | Range of flow meter                            | Setting value to specify flow amount time unit | T (ms) | /s | 0 | 1000 | /min | 1   | 60000 | /h   | 2 | 3600000 |
|   | Range of flow meter   | Setting value to specify flow amount time unit | T (ms)   |        |    |   |      |      |     |       |      |   |         |
|   | /s  | 0  | 1000   |        |    |   |      |      |     |       |      |   |         |
|   | /min  | 1  | 60000  |        |    |   |      |      |     |       |      |   |         |
| /h  | 2   | 3600000  |  |        |    |   |      |      |     |       |      |   |         |
| Unit scaling for integrated flow amount   |   |  |  |        |    |   |      |      |     |       |      |   |         |
| This is used when the value of instantaneous flow amount $\times \Delta T/T$ is 0 to 1. |   |  |  |        |    |   |      |      |     |       |      |   |         |
| Unit scaling  | <table><tr><th>Setting value to specify unit scaling</th><th>Unit scaling</th></tr><tr><td>0</td><td>1</td></tr><tr><td>1</td><td>10</td></tr><tr><td>2</td><td>100</td></tr><tr><td>3</td><td>1000</td></tr><tr><td>4</td><td>10000</td></tr></table>            | Setting value to specify unit scaling          | Unit scaling                                   | 0      | 1  | 1 | 10   | 2    | 100 | 3     | 1000 | 4 | 10000   |
| Setting value to specify unit scaling   | Unit scaling  |  |  |        |    |   |      |      |     |       |      |   |         |
| 0   | 1   |  |  |        |    |   |      |      |     |       |      |   |         |
| 1   | 10  |  |  |        |    |   |      |      |     |       |      |   |         |
| 2   | 100   |  |  |        |    |   |      |      |     |       |      |   |         |
| 3   | 1000  |  |  |        |    |   |      |      |     |       |      |   |         |
| 4   | 10000   |  |  |        |    |   |      |      |     |       |      |   |         |
| Previous amount   | Stored integrated flow amount value before integral processing  |  |  |        |    |   |      |      |     |       |      |   |         |

## Realize fast and smooth continuous analog output

### Wave output function

The industry's first<sup>\*1</sup> waveform output function is included.


This function enables control wave data that is faster than the program control to be directly registered in the D/A converter module and output the data at a set conversion cycle.

Therefore, the analog output value is not affected by the scan time of the CPU module resulting in faster and smoother analog control.

\*1: Mitsubishi Electric survey dated April 2012.

#### Analog output from sequence program

Analog values are output at each scan time.

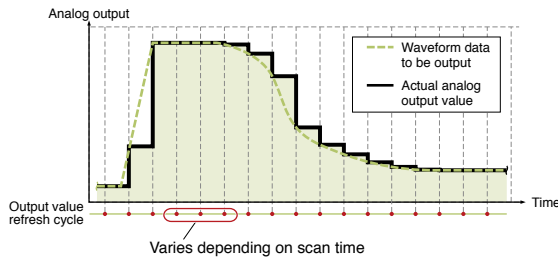


The actual waveform and the output waveform deviate.



#### Analog output with waveform output function


Analog values are output at set interval.

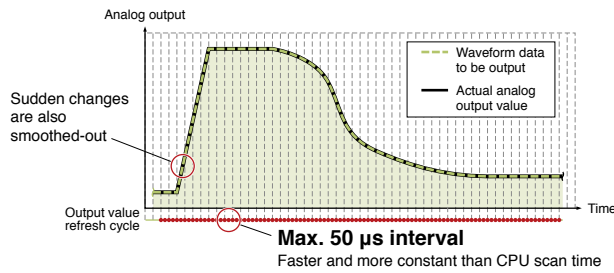

The output waveform is closer to the actual waveform (less deviation).


Register up to 50000 points of waveform output data

### ① Using GX Works2 to create the waveform output data to be analog output

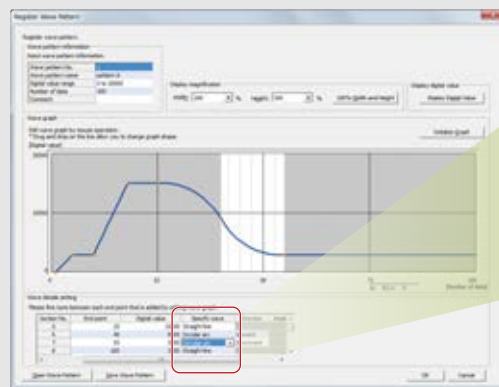


By registering the waveform patterns (multiple), they can be combined freely with the tool.

### ② Save waveform output data into CPU module's file register (or SD memory card)

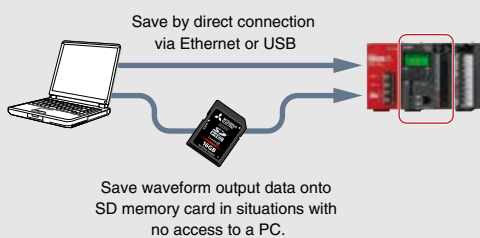

### ③ Execute the function block (FB)<sup>\*2</sup> and register into analog output module

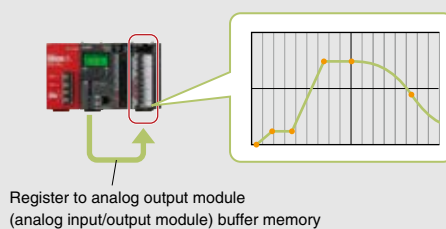

\*2: Contact your local Mitsubishi Electric sales office or representative.


## More flexible calculation and conversion reduce programming time

L60AD2DA2

### Conversion by polynomial expressions

The variable arithmetic function enables the analog I/O module to perform polynomial calculations, eliminating the need of such calculations programmed by ladder. With the calculations performed on the analog I/O module side, advanced calculations are possible without being restricted by the scan time.

Make polynomial expressions using brackets, operators, constants, and data saved in buffer memory.

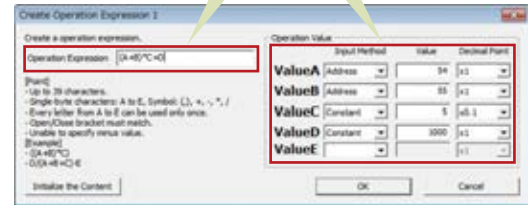


### Graph-form conversion characteristics

The variable conversion characteristics function enables conversion characteristics for analog input, analog output, and analog I/O to be easily set on graphs. This means that conversion characteristics do not need to be programmed by ladder, which leads to reduced programming time.

| Item          | Description  |
|---------------|--|
| Analog input  | Conversion characteristics can be easily set for the A-D conversion channels (CH1, CH2).   |
| Analog output | Conversion characteristics can be easily set for the D-A conversion channels (CH3, CH4).   |
| Analog I/O    | Conversion characteristics for the analog input-output conversion can be easily set in simple steps, eliminating the need of creating ladder programs. |

#### Previous control method


Ex.) Analog output module

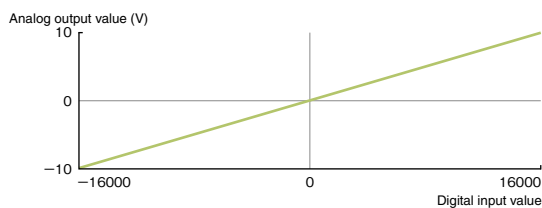

Straight line between the offset and gain values was the conversion characteristics

#### Control using graph-form conversion characteristics

Ex.) Analog I/O module

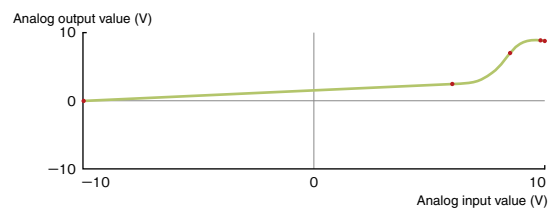


Conversion characteristics can be easily set


### Conversion by graph-form conversion characteristics plus polynomial expressions

The two functions described above can also be combined; the digital values are first converted according to graph-form conversion characteristics and then by polynomial expressions. These two levels of conversion realize full adjustment of analog values at the time of output rather than adjusting them post-conversion.

Ex.) Obtaining intended analog output using the conversion by graph-form conversion characteristics plus polynomial expressions

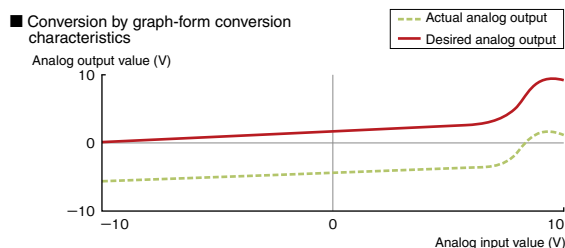

Gap still exists between desired and actual analog outputs

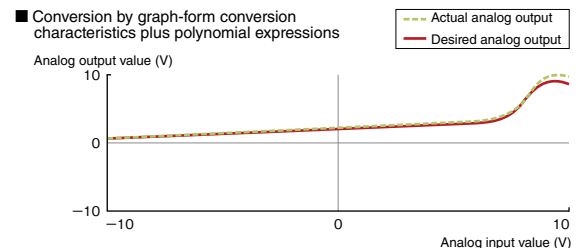


Analog output values are adjusted towards the desired output

## One module covering voltage, current, micro-voltage, thermocouples and RTD

For each channel, it is possible to select from voltage, current, micro-voltage, thermocouples or RTD. As a result, dedicated modules required for each type of sensor can now be integrated into a single module.

**Example** System with up to four channels (including analog and temperature input channels)

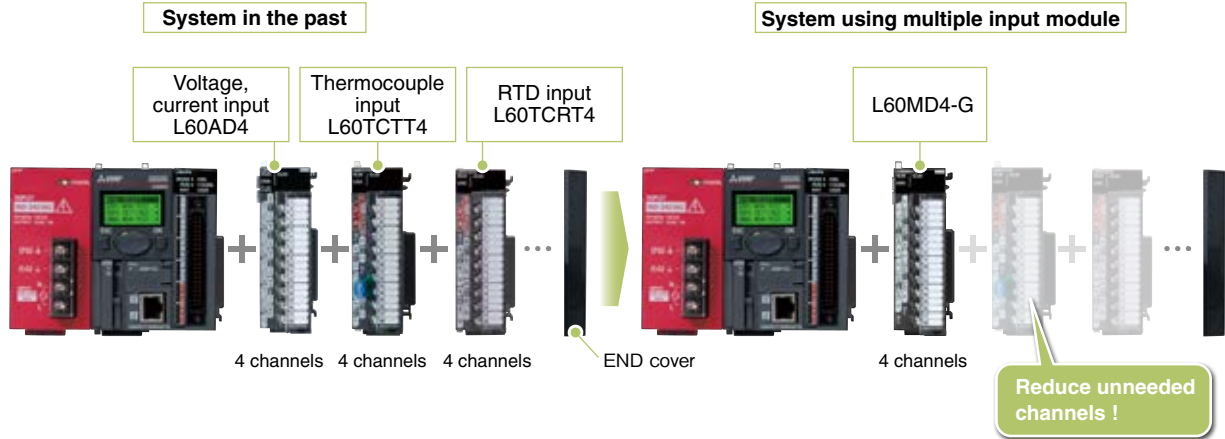

The multiple input module also supports the Pt50 and JPt100 sensors, which are compatible with the former JIS standards. Modules can be replaced without altering the already existing sensor equipment.

|              |   |
|--------------|---|
| Thermocouple | K, J, T, E, N, R, S, B, U, L, PL II, W5Re/W26Re |
| RTD          | Pt1000, Pt100, JPt100, Pt50                     |

## 8 input channels with wider input ranges

L60RD8


Single L60RD8 can measure temperatures of up to 8 channels. With the number of supported channels doubled compared to before (L60MD4-G), space and cost savings can be realized. The input range is expanded to meet the DIN standards, GOST standards, and Pt1000 range in addition to Pt100, JPt100, and Pt50, bringing new application possibilities.

|     |  |
|-----|--|
| RTD | Pt1000, Pt100, JPt100, Pt50, Ni (DIN standards), Cu (GOST standards) |
|-----|--|

## Reduced wiring time with no screw tightening

L60RD8


The module is equipped with a spring clamp terminal block, which does not require screw tightening. This push-in type terminal block does not require any dedicated wiring tool and significantly reduces the installation time.

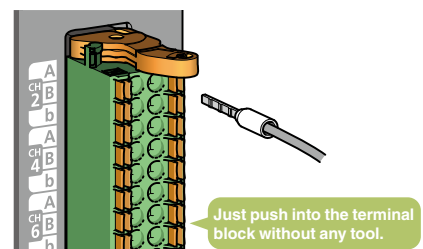

## Easier calibration

L60RD8

Measured temperatures can be easily calibrated towards the actual temperature using the sensor calibration function (shift function, 2-point sensor compensation function).

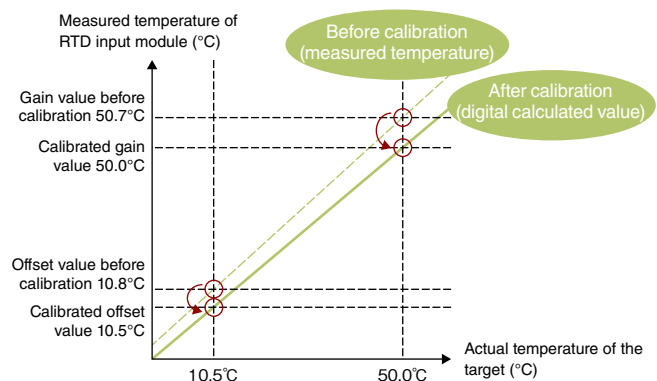

The measured temperature of 10.8 to 50.7 (°C) is calibrated to be 10.5 to 50.0 (°C) by digital calculation. A temperature closer to the one input to RTD is obtained.

## Multiple input (voltage/current/temperature) module specifications

| Item                                |                                 | L60MD4-G  |  |   |                      |            |
|-------------------------------------|---------------------------------|---|--|---|----------------------|------------|
| Number of analog input channels     |                                 | 4 channels  |  |   |                      |            |
| Analog input                        | Voltage                         | -10...10 V DC (Input resistance value 1 MΩ)   |  |   |                      |            |
|                                     | Current                         | 0...20 mA DC (Input resistance value 250 Ω)   |  |   |                      |            |
|                                     | micro voltage                   | -100...100 mV DC  |  |   |                      |            |
|                                     | Thermocouple                    | Available type  | K, J, T, E, N, R, S, B, U, L, PL II , W5Re/W26Re   |   |                      |            |
|                                     |                                 | Cold junction compensation resistor   | Use the included cold junction compensation resistor (CJ)  |   |                      |            |
|                                     | Resistive thermal device        | Available type  | Pt1000, Pt100, JPt100, Pt50  |   |                      |            |
| Measurement method                  |                                 | 3-wire system   |  |   |                      |            |
| Digital output                      |                                 | Voltage, Current, micro voltage   | -20480...20479   |   |                      |            |
|                                     |                                 | Resistive thermal device Pt100 (-20...120°C), JPt100 (-20...120°C)  | -2000...20000: Value rounded off to two decimal places × 100 times   |   |                      |            |
|                                     |                                 | Thermocouple, Resistive thermal device (other than the above)   | -4000...32000: Value rounded off to one decimal place × 10 times   |   |                      |            |
|                                     | When using the scaling function | -32768...32767  |  |   |                      |            |
| I/O characteristics, resolution     |                                 |   |  |   |                      |            |
|                                     |                                 | Voltage   | Analog input range   |   | Digital output value | Resolution |
|                                     |                                 |   | 0...10 V   |   | 0...20000            | 500 μV     |
|                                     |                                 |   | 0...5 V  |   | 0...20000            | 250 μV     |
|                                     |                                 |   | 1...5 V  |   | 0...20000            | 200 μV     |
|                                     |                                 |   | -10...10 V   |   | -20000...20000       | 500 μV     |
|                                     |                                 | 1...5 V (Extended mode)   |  | -5000...22500                                       | 200 μV               |            |
|                                     |                                 | Current   | 0...20 mA  |   | 0...20000            | 1000 nA    |
|                                     |                                 |   | 4...20 mA  |   |                      | 800 nA     |
|                                     |                                 |   | 4...20 mA (Extended mode)  |   | -5000...22500        | 800 nA     |
|                                     |                                 | micro voltage   | -100...100 mV  |   | -20000...20000       | 5 μV       |
|                                     |                                 | Thermocouple  | B, R, S, N, PL II, W5Re/W26Re: 0.3°C<br>K, E, J, T, U, L: 0.1°C  |   |                      |            |
|                                     |                                 | Resistive thermal device (RTD)  | Pt100 (-20...120°C),<br>JPt100 (-20...120°C) : 0.03°C<br>Pt100 (-200...850°C),<br>JPt100 (-200...600°C), Pt1000, Pt50: 0.1°C   |   |                      |            |
| Accuracy <sup>*1,2</sup>            |                                 | Voltage/Current/<br>micro voltage   | Ambient temperature 25 ± 5°C   | Maximum value of the measurement<br>rangex (± 0.3%) |                      |            |
|                                     |                                 |   | Ambient temperature 0...55°C   | Maximum value of the measurement<br>rangex (± 0.9%) |                      |            |
|                                     |                                 | Thermocouple  | Ambient temperature 25 ± 5°C   | Full scalex (± 0.15%)                               |                      |            |
|                                     |                                 |   | Ambient temperature 0...55°C   | Full scalex (± 0.3%) <sup>*3</sup>                  |                      |            |
|                                     |                                 | Cold junction<br>compensation<br>resistor <sup>*4</sup>   | Temperature measured value:<br>-100°C or higher  | ≤ ± 1.0°C   |                      |            |
|                                     |                                 |   | Temperature measured value:<br>-150°C...-100°C   | ≤ ± 2.0°C   |                      |            |
|                                     |                                 |   | Temperature measured value:<br>-200°C...-150°C   | ≤ ± 3.0°C   |                      |            |
|                                     |                                 | Resistive thermal<br>device   | (Accuracy) <sup>*5</sup> = (Conversion accuracy) + (Temperature characteristics) ×<br>(Operating ambient temperature change)<br>+ (Allowable difference of resistance temperature detector used) |   |                      |            |
|                                     |                                 | Conversion speed  |  | 50 ms/ch  |                      |            |
|                                     |                                 | Output current for temperature detection  |  | Pt100, JPt100, Pt50: 1 mA, Pt1000: 0.2 mA           |                      |            |
| Absolute maximum input              |                                 | Voltage: ±15 V, Current: 30 mA <sup>*6</sup>  |  |   |                      |            |
| Isolation method                    |                                 | Between I/O terminals and programmable controller power supply: photocoupler isolation<br>Between input channels: transformer isolation |  |   |                      |            |
| Module size allocation              |                                 | 1   |  |   |                      |            |
| Number of occupied I/O points       |                                 | 16 points (I/O assignment: 16 points for intelligent)   |  |   |                      |            |
| External interface                  |                                 | 18-point terminal block   |  |   |                      |            |
| 5 V DC internal current consumption |                                 | 0.49 A  |  |   |                      |            |
| Weight                              |                                 | 0.19 kg   |  |   |                      |            |

\*1: Except when influenced by noise.

\*2: To acquire sufficient accuracy, a warm-up (conduction) for 15 minutes is required.

\*3: The accuracy for when the measured temperature of the type W5Re/W26Re thermocouple is 2000°C or higher is ±0.5%.

\*4: The following table shows the accuracy of the cold junction compensation for when the type "T" thermocouple or type "U" thermocouple is used.

| Measured temperature | T Thermocouple | U Thermocouple |
|----------------------|----------------|----------------|
| 0°C or higher        | ± 1.0°C        |                |
| -100°C...0°C         | ± 2.0°C        |                |
| -150°C...-100°C      | ± 3.0°C        |                |
| -200°C...-150°C      | ± 5.0°C        | ± 4.0°C        |

\*5: The following table shows RTD types and values for each item.

| RTD type | Celsius                    |   |  | Fahrenheit                 |   |  |
|----------|----------------------------|---|--|----------------------------|---|--|
|          | Measured temperature range | Conversion accuracy (operating ambient temperature: 25±5°C) | Temperature characteristics (for a change of 1°C in the operating ambient temperature) | Measured temperature range | Conversion accuracy (operating ambient temperature: 25±5°C) | Temperature characteristics (for a change of 1°C in the operating ambient temperature) |
| Pt100    | -20...-120°C               | 1°C   | 0.1°C  | 0...200°F                  | 1°F   | 0.1°F  |
|          | -200...850°C               | 2°C   | 0.2°C  | -300...1500°F              | 3°F   | 0.3°F  |
| JPt100   | -20...-120°C               | 1°C   | 0.1°C  | 0...200°F                  | 1°F   | 0.1°F  |
|          | -200...600°C               | 2°C   | 0.2°C  | -300...1100°F              | 3°F   | 0.3°F  |
| Pt1000   | -200...850°C               | 2°C   | 0.2°C  | -300...1500°F              | 3°F   | 0.3°F  |
| Pt50     | -200...650°C               | 2°C   | 0.2°C  | -300...1200°F              | 3°F   | 0.2°F  |

\*6: A momentary current value which does not cause damage to internal resistors of the module, although the maximum continuous input current is 24 mA.



## Analog input module specifications

### L60AD4

| Item                                |                              | L60AD4   |                           |                      |            |
|-------------------------------------|------------------------------|--|---------------------------|----------------------|------------|
| Number of analog input channels     |                              | 4 channels   |                           |                      |            |
| Analog input                        | Voltage                      | -10...10 V DC (Input resistance value 1 MΩ)  |                           |                      |            |
|                                     | Current                      | 0...20 mA DC (Input resistance value 250 Ω)  |                           |                      |            |
| Digital output                      |                              | -20480...20479   |                           |                      |            |
| When using the scaling function     |                              | -32768...32767   |                           |                      |            |
| I/O characteristics, resolution     |                              |  |                           |                      |            |
|                                     |                              | Voltage  | Analog input range        | Digital output value | Resolution |
|                                     |                              |  | 0...10 V                  | 0...20000            | 500 μV     |
|                                     |                              |  | 0...5 V                   |                      | 250 μV     |
|                                     |                              |  | 1...5 V                   |                      | 200 μV     |
|                                     |                              |  | -10...10 V                | -20000...20000       | 500 μV     |
|                                     |                              |  | 1...5 V (Extended mode)   | -5000...22500        | 200 μV     |
|                                     |                              | Users range setting  | -20000...20000            | 307 μV*1             |            |
|                                     |                              | Current  | 0...20 mA                 | 0...20000            | 1000 nA    |
|                                     |                              |  | 4...20 mA                 |                      | 800 nA     |
|                                     |                              |  | 4...20 mA (Extended mode) | -5000...22500        | 800 nA     |
|                                     |                              |  | Users range setting       | -20000...20000       | 1230 nA*1  |
| Accuracy*2                          | Ambient temperature 25 ± 5°C | ≤ ± 0.1% (± 20 digit)  |                           |                      |            |
|                                     | Ambient temperature 0...55°C | ≤ ± 0.2% (± 40 digit)  |                           |                      |            |
| Conversion speed*3*4*5              |                              | High speed: 20 μs/channel Medium speed: 80 μs/channel Low speed: 1 ms/channel  |                           |                      |            |
| Absolute maximum input              |                              | Voltage: ± 15 V, Current: 30 mA*6  |                           |                      |            |
| Isolation method                    |                              | Between I/O terminals and programmable controller power supply: photocoupler isolation<br>Between input channels: no isolation |                           |                      |            |
| Module size allocation              |                              | 1  |                           |                      |            |
| Number of occupied I/O points       |                              | 16 points (I/O assignment: 16 points for intelligent)  |                           |                      |            |
| External interface                  |                              | 18-point terminal block  |                           |                      |            |
| 5 V DC internal current consumption |                              | 0.52 A   |                           |                      |            |
| Weight                              |                              | 0.19 kg  |                           |                      |            |

### L60ADVL8

| Item                                 |                              | L60ADVL8   |                        |                      |        |
|--------------------------------------|------------------------------|--|------------------------|----------------------|--------|
| Number of analog input channels      |                              | 8 channels   |                        |                      |        |
| Analog input                         |                              | Voltage  |                        |                      |        |
| Digital output                       |                              | -10...10 V DC (Input resistance value 1 MΩ)  |                        |                      |        |
| When using the scaling function      |                              | -16384...16383   |                        |                      |        |
|                                      |                              | -32768...32767   |                        |                      |        |
| I/O characteristics, resolution      |                              |  |                        |                      |        |
|                                      |                              | Analog input range   |                        | Digital output value |        |
|                                      |                              | Voltage  | 0...10 V               | 0...16000            | 625 μV |
|                                      |                              |  | 0...5 V                | 0...8000             | 625 μV |
|                                      |                              |  | 1...5 V                |                      | 500 μV |
|                                      |                              |  | -10...10 V             | -16000...16000       | 625 μV |
|                                      |                              |  | 1...5 V(Extended mode) | -2000...9000         | 500 μV |
| Users range setting                  |                              | -8000...8000   | 414 μV <sup>1</sup>    |                      |        |
| Accuracy <sup>*2</sup>               | Ambient temperature 25 ± 5°C |  | ≤ ± 0.2%               |                      |        |
|                                      | Ambient temperature 0...55°C |  | ≤ ± 1%                 |                      |        |
| Conversion speed <sup>*3,*4,*5</sup> |                              | 1 ms/ch  |                        |                      |        |
| Absolute maximum input               |                              | Voltage ± 15 V   |                        |                      |        |
| Isolation method                     |                              | Between I/O terminals and programmable controller power supply: photocoupler isolation |                        |                      |        |
|                                      |                              | Between input channels: no isolation   |                        |                      |        |
| Module size allocation               |                              | 1  |                        |                      |        |
| Number of occupied I/O points        |                              | 16 points(I/O assignment: 16 points for intelligent)                                   |                        |                      |        |
| External interface                   |                              | 18-point terminal block  |                        |                      |        |
| 5 V DC internal current consumption  |                              | 0.20 A   |                        |                      |        |
| Weight                               |                              | 0.19 kg  |                        |                      |        |

### L60ADIL8

| Item                                 |                                 | L60ADIL8   |                          |  |                      |            |
|--------------------------------------|---------------------------------|--|--------------------------|--|----------------------|------------|
| Number of analog input channels      |                                 | 8 channels   |                          |  |                      |            |
| Analog input                         | Current                         | 0...20 mA DC (Input resistance value 250 Ω)  |                          |  |                      |            |
| Digital output                       |                                 | -8192...8192   |                          |  |                      |            |
|                                      | When using the scaling function | -32768...32767   |                          |  |                      |            |
| I/O characteristics, resolution      |                                 |  |                          |  |                      |            |
|                                      |                                 | Current  | Analog input range       |  | Digital output value | Resolution |
|                                      |                                 |  | 0...20 mA                |  | 0...8000             | 2500 nA    |
|                                      |                                 |  | 4...20 mA                |  |                      | 2000 nA    |
|                                      |                                 |  | 4...20 mA(Extended mode) |  | -2000...9000         | 2000 nA    |
| Users range setting                  |                                 | -8000...8000   | 1660 nA <sup>*1</sup>    |  |                      |            |
| Accuracy <sup>*2</sup>               | Ambient temperature 25 ± 5°C    | ≤ ± 0.2%   |                          |  |                      |            |
|                                      | Ambient temperature 0...55°C    | ≤ ± 1%   |                          |  |                      |            |
| Conversion speed <sup>*3,*4,*5</sup> |                                 | 1 ms/ch  |                          |  |                      |            |
| Absolute maximum input               |                                 | Current 30 mA <sup>*6</sup>  |                          |  |                      |            |
| Isolation method                     |                                 | Between I/O terminals and programmable controller power supply: photocoupler isolation<br>Between input channels: no isolation |                          |  |                      |            |
| Module size allocation               |                                 | 1  |                          |  |                      |            |
| Number of occupied I/O points        |                                 | 16 points (I/O assignment: 16 points for intelligent)  |                          |  |                      |            |
| External interface                   |                                 | 18-point terminal block  |                          |  |                      |            |
| 5 V DC internal current consumption  |                                 | 0.21 A   |                          |  |                      |            |
| Weight                               |                                 | 0.19 kg  |                          |  |                      |            |

\*1: Maximum resolution in the user range setting.

\*2: Accuracy for the maximum value of the digital output value. Except when influenced by noise.

\*3: The default value is 80 μs/channel.

\*4: The logging function can be used only in the middle speed (80 μs/channel) or low speed (1 ms/channel).

\*5: The flow amount integration function can be used only in the low speed (1 ms/channel).

\*6: A momentary current value which does not cause damage to internal resistors of the module, although the maximum continuous input current is 24 mA.

## Dual channel isolation analog input module specifications

| Item                                    |                                       |           | L60AD4-2GH  |                           |                |                      |            |
|---|---------------------------------------|-----------|---|---------------------------|----------------|----------------------|------------|
| Number of analog input channels         |                                       |           | 4 channels  |                           |                |                      |            |
| Analog input                            | Voltage                               |           | -10...10 V DC (Input resistance value 1 MΩ)   |                           |                |                      |            |
|   | Current                               |           | 0...20 mA DC (Input resistance value 250 Ω)   |                           |                |                      |            |
| Digital output                          |                                       |           | -32000...32000  |                           |                |                      |            |
| When using the scaling function         |                                       |           | -32768...32767  |                           |                |                      |            |
| I/O characteristics, resolution         |                                       |           | Voltage   | Analog input range        |                | Digital output value | Resolution |
|   |                                       |           |   | 0...10 V                  |                | 0...32000            | 312.5 μV   |
|   |                                       |           |   | 0...5 V                   |                |                      | 156 μV     |
|   |                                       |           |   | 1...5 V                   |                |                      | 125 μV     |
|   |                                       |           |   | -10...10 V                |                |                      | 312.5 μV   |
|   |                                       |           |   | 1...5 V (Extended mode)   |                | -8000...32000        | 125 μV     |
|   |                                       |           | Users range setting (Bipolar: voltage)  |                           | -32000...32000 | 200 μV* <sup>1</sup> |            |
|   |                                       |           | Current   | 0...20 mA                 |                | 0...32000            | 625 nA     |
|   |                                       |           |   | 4...20 mA                 |                |                      | 500 nA     |
|   |                                       |           |   | 4...20 mA (Extended mode) |                | -8000...32000        | 500 nA     |
| Users range setting (Unipolar: Current) |                                       | 0...32000 |   | 400 nA* <sup>1</sup>      |                |                      |            |
| Accuracy* <sup>2</sup>                  | Reference accuracy* <sup>3</sup>      |           | ≤ ± 0.05% (± 16 digit)  |                           |                |                      |            |
|   | Temperature coefficient* <sup>4</sup> |           | ≤ ± 40.1 ppm/°C   |                           |                |                      |            |
| Conversion speed                        |                                       |           | 40 μs/2 channel   |                           |                |                      |            |
| Absolute maximum input                  |                                       |           | Voltage: ± 15 V, Current: 30 mA* <sup>5</sup>   |                           |                |                      |            |
| Isolation method                        |                                       |           | Between I/O terminals and programmable controller power supply: photocoupler isolation<br>Between analog input channels: dual channel transformer isolation |                           |                |                      |            |
| Module size allocation                  |                                       |           | 1   |                           |                |                      |            |
| Number of occupied I/O points           |                                       |           | 16 points (I/O assignment: 16 points for intelligent)   |                           |                |                      |            |
| External interface                      |                                       |           | 18-point terminal block   |                           |                |                      |            |
| 5 V DC internal current consumption     |                                       |           | 0.76 A  |                           |                |                      |            |
| Weight                                  |                                       |           | 0.20 kg   |                           |                |                      |            |
| External trigger input                  | Input points                          |           | 1 point   |                           |                |                      |            |
|   | Rated input voltage                   |           | 24 V DC (+ 20%/-15%, ripple ratio: ≤ 5%)  |                           |                |                      |            |
|   | Rated input current                   |           | 6.0 mA TYP. (at 24 V DC)  |                           |                |                      |            |
|   | ON voltage/ON current                 |           | ≥ 13 V, ≥ 3 mA  |                           |                |                      |            |
|   | OFF voltage/OFF current               |           | ≤ 8 V, ≤ 1.6 mA   |                           |                |                      |            |
|   | Input resistance                      |           | 3.9 kΩ  |                           |                |                      |            |
|   | Response time                         | OFF to ON | 40 μs   |                           |                |                      |            |
|   |                                       | ON to OFF | 40 μs   |                           |                |                      |            |

\*1: Maximum resolution in the user range setting.

\*2: Accuracy for the maximum value of the digital output value. Except when influenced by noise.

\*3: Accuracy under the ambient temperature when the offset/gain setting is performed.

\*4: Accuracy when the temperature changes 1°C.

Example: Accuracy when the temperature changes from 25°C to 30°C

$0.05\% + 0.00401\%/^{\circ}\text{C} (\text{temperature coefficient}) \times 5^{\circ}\text{C} (\text{temperature change}) = 0.070\%$

\*5: A momentary input current value which does not cause damage to internal resistors of the module. The maximum input current value for constant application is 24 mA.

## Analog output module specifications

### L60DA4

| Item                                |                              | L60DA4  |                     |                      |                      |  |               |            |         |         |           |        |         |        |            |        |                     |                      |         |           |           |         |           |        |                     |                      |
|-------------------------------------|------------------------------|---|---------------------|----------------------|----------------------|--|---------------|------------|---------|---------|-----------|--------|---------|--------|------------|--------|---------------------|----------------------|---------|-----------|-----------|---------|-----------|--------|---------------------|----------------------|
| Number of analog output channels    |                              | 4 channels  |                     |                      |                      |  |               |            |         |         |           |        |         |        |            |        |                     |                      |         |           |           |         |           |        |                     |                      |
| Digital input                       |                              | -20480...20479  |                     |                      |                      |  |               |            |         |         |           |        |         |        |            |        |                     |                      |         |           |           |         |           |        |                     |                      |
| When using the scaling function     |                              | -32768...32767  |                     |                      |                      |  |               |            |         |         |           |        |         |        |            |        |                     |                      |         |           |           |         |           |        |                     |                      |
| Analog output                       | Voltage                      | -10...10 V DC (External load resistance value 1 kΩ...1 MΩ)  |                     |                      |                      |  |               |            |         |         |           |        |         |        |            |        |                     |                      |         |           |           |         |           |        |                     |                      |
|                                     | Current                      | 0...20 mA DC (External load resistance value 0 Ω...600 Ω)   |                     |                      |                      |  |               |            |         |         |           |        |         |        |            |        |                     |                      |         |           |           |         |           |        |                     |                      |
| I/O characteristics, resolution     |                              | <table><tr><td colspan="2">Analog output range</td><td>Digital value</td><td>Resolution</td></tr><tr><td rowspan="4">Voltage</td><td>0...5 V</td><td rowspan="3">0...20000</td><td>250 μV</td></tr><tr><td>1...5 V</td><td>200 μV</td></tr><tr><td>-10...10 V</td><td>500 μV</td></tr><tr><td>Users range setting</td><td>333 μV*<sup>6</sup></td></tr><tr><td rowspan="3">Current</td><td>0...20 mA</td><td rowspan="3">0...20000</td><td>1000 nA</td></tr><tr><td>4...20 mA</td><td>800 nA</td></tr><tr><td>Users range setting</td><td>700 nA*<sup>6</sup></td></tr></table> |                     |                      | Analog output range  |  | Digital value | Resolution | Voltage | 0...5 V | 0...20000 | 250 μV | 1...5 V | 200 μV | -10...10 V | 500 μV | Users range setting | 333 μV* <sup>6</sup> | Current | 0...20 mA | 0...20000 | 1000 nA | 4...20 mA | 800 nA | Users range setting | 700 nA* <sup>6</sup> |
|                                     |                              | Analog output range   |                     | Digital value        | Resolution           |  |               |            |         |         |           |        |         |        |            |        |                     |                      |         |           |           |         |           |        |                     |                      |
|                                     |                              | Voltage   | 0...5 V             | 0...20000            | 250 μV               |  |               |            |         |         |           |        |         |        |            |        |                     |                      |         |           |           |         |           |        |                     |                      |
|                                     |                              |   | 1...5 V             |                      | 200 μV               |  |               |            |         |         |           |        |         |        |            |        |                     |                      |         |           |           |         |           |        |                     |                      |
|                                     |                              |   | -10...10 V          |                      | 500 μV               |  |               |            |         |         |           |        |         |        |            |        |                     |                      |         |           |           |         |           |        |                     |                      |
|                                     |                              |   | Users range setting | 333 μV* <sup>6</sup> |                      |  |               |            |         |         |           |        |         |        |            |        |                     |                      |         |           |           |         |           |        |                     |                      |
|                                     |                              | Current   | 0...20 mA           | 0...20000            | 1000 nA              |  |               |            |         |         |           |        |         |        |            |        |                     |                      |         |           |           |         |           |        |                     |                      |
|                                     |                              |   | 4...20 mA           |                      | 800 nA               |  |               |            |         |         |           |        |         |        |            |        |                     |                      |         |           |           |         |           |        |                     |                      |
|                                     |                              |   | Users range setting |                      | 700 nA* <sup>6</sup> |  |               |            |         |         |           |        |         |        |            |        |                     |                      |         |           |           |         |           |        |                     |                      |
| Accuracy <sup>*7</sup>              | Ambient temperature 25 ± 5°C | ≤ ± 0.1%  |                     |                      |                      |  |               |            |         |         |           |        |         |        |            |        |                     |                      |         |           |           |         |           |        |                     |                      |
|                                     | Ambient temperature 0...55°C | ≤ ± 0.3%  |                     |                      |                      |  |               |            |         |         |           |        |         |        |            |        |                     |                      |         |           |           |         |           |        |                     |                      |
| Conversion speed                    | Normal output mode           | 20 μs/channel   |                     |                      |                      |  |               |            |         |         |           |        |         |        |            |        |                     |                      |         |           |           |         |           |        |                     |                      |
|                                     | Wave output mode             | 50 μs/channel 80 μs/channel   |                     |                      |                      |  |               |            |         |         |           |        |         |        |            |        |                     |                      |         |           |           |         |           |        |                     |                      |
| Output short protection             |                              | Protected   |                     |                      |                      |  |               |            |         |         |           |        |         |        |            |        |                     |                      |         |           |           |         |           |        |                     |                      |
| Isolation method                    |                              | Between I/O terminals and programmable controller power supply: photocoupler isolation<br>Between output channels: no isolation<br>Between external power supply and analog output: transformer isolation   |                     |                      |                      |  |               |            |         |         |           |        |         |        |            |        |                     |                      |         |           |           |         |           |        |                     |                      |
| Module size allocation              |                              | 1   |                     |                      |                      |  |               |            |         |         |           |        |         |        |            |        |                     |                      |         |           |           |         |           |        |                     |                      |
| Number of occupied I/O points       |                              | 16 points (I/O assignment: 16 points for intelligent)   |                     |                      |                      |  |               |            |         |         |           |        |         |        |            |        |                     |                      |         |           |           |         |           |        |                     |                      |
| External interface                  |                              | 18-point terminal block<br>24 V DC (+20%, -15%)   |                     |                      |                      |  |               |            |         |         |           |        |         |        |            |        |                     |                      |         |           |           |         |           |        |                     |                      |
| External power supply               |                              | Ripple, spike 500 mV <sub>p-p</sub> or lower  |                     |                      |                      |  |               |            |         |         |           |        |         |        |            |        |                     |                      |         |           |           |         |           |        |                     |                      |
|                                     |                              | Inrush current: 4.3 A, 1000 μs or shorter   |                     |                      |                      |  |               |            |         |         |           |        |         |        |            |        |                     |                      |         |           |           |         |           |        |                     |                      |
|                                     |                              | Current consumption: 0.18 A   |                     |                      |                      |  |               |            |         |         |           |        |         |        |            |        |                     |                      |         |           |           |         |           |        |                     |                      |
| 5 V DC internal current consumption |                              | 0.16 A  |                     |                      |                      |  |               |            |         |         |           |        |         |        |            |        |                     |                      |         |           |           |         |           |        |                     |                      |
| Weight                              |                              | 0.20 kg   |                     |                      |                      |  |               |            |         |         |           |        |         |        |            |        |                     |                      |         |           |           |         |           |        |                     |                      |

\*6: Maximum resolution in the user range setting.

\*7: Accuracy for the maximum value of analog output value. Except when influenced by noise. Warm up (power on) the module for 30 minutes to satisfy the accuracy shown in the table.

## Analog output module specifications

### L60DAVL8

| Item                                |                                 | L60DAV/L8   | NEW        |                     |  |               |            |         |         |          |        |         |        |            |                |        |                     |              |          |
|-------------------------------------|---------------------------------|---|------------|---------------------|--|---------------|------------|---------|---------|----------|--------|---------|--------|------------|----------------|--------|---------------------|--------------|----------|
| Number of analog output channels    |                                 | 8 channels  |            |                     |  |               |            |         |         |          |        |         |        |            |                |        |                     |              |          |
| Digital input                       |                                 | -16384...16383  |            |                     |  |               |            |         |         |          |        |         |        |            |                |        |                     |              |          |
|                                     | When using the scaling function | -32768...32767  |            |                     |  |               |            |         |         |          |        |         |        |            |                |        |                     |              |          |
| Analog output                       | Voltage                         | -10...10 V DC (External load resistance value 1 kΩ...1 MΩ)  |            |                     |  |               |            |         |         |          |        |         |        |            |                |        |                     |              |          |
| I/O characteristics, resolution     |                                 | <table><tr><th colspan="2">Analog output range</th><th>Digital value</th><th>Resolution</th></tr><tr><td rowspan="4">Voltage</td><td>0...5 V</td><td rowspan="2">0...8000</td><td>625 μV</td></tr><tr><td>1...5 V</td><td>500 μV</td></tr><tr><td>-10...10 V</td><td>-16000...16000</td><td>625 μV</td></tr><tr><td>Users range setting</td><td>-8000...8000</td><td>320 μV*1</td></tr></table> |            | Analog output range |  | Digital value | Resolution | Voltage | 0...5 V | 0...8000 | 625 μV | 1...5 V | 500 μV | -10...10 V | -16000...16000 | 625 μV | Users range setting | -8000...8000 | 320 μV*1 |
| Analog output range                 |                                 | Digital value   | Resolution |                     |  |               |            |         |         |          |        |         |        |            |                |        |                     |              |          |
| Voltage                             | 0...5 V                         | 0...8000  | 625 μV     |                     |  |               |            |         |         |          |        |         |        |            |                |        |                     |              |          |
|                                     | 1...5 V                         |   | 500 μV     |                     |  |               |            |         |         |          |        |         |        |            |                |        |                     |              |          |
|                                     | -10...10 V                      | -16000...16000  | 625 μV     |                     |  |               |            |         |         |          |        |         |        |            |                |        |                     |              |          |
|                                     | Users range setting             | -8000...8000  | 320 μV*1   |                     |  |               |            |         |         |          |        |         |        |            |                |        |                     |              |          |
| Accuracy*2                          | Ambient temperature<br>25 ± 5°C | ≤ ± 0.3%  |            |                     |  |               |            |         |         |          |        |         |        |            |                |        |                     |              |          |
|                                     | Ambient temperature<br>0...55°C | ≤ ± 0.5%  |            |                     |  |               |            |         |         |          |        |         |        |            |                |        |                     |              |          |
| Conversion speed                    | Normal output mode              | 200 μs/channel  |            |                     |  |               |            |         |         |          |        |         |        |            |                |        |                     |              |          |
|                                     | Wave output mode                | 200 μs/channel  |            |                     |  |               |            |         |         |          |        |         |        |            |                |        |                     |              |          |
| Output short protection             |                                 | Protected   |            |                     |  |               |            |         |         |          |        |         |        |            |                |        |                     |              |          |
| Isolation method                    |                                 | Between I/O terminals and programmable controller power supply: photocoupler isolation<br>Between output channels: no isolation<br>Between external power supply and analog output: transformer isolation   |            |                     |  |               |            |         |         |          |        |         |        |            |                |        |                     |              |          |
| Module size allocation              |                                 | 2   |            |                     |  |               |            |         |         |          |        |         |        |            |                |        |                     |              |          |
| Number of occupied I/O points       |                                 | 16 points (I/O assignment: 16 points for intelligent)   |            |                     |  |               |            |         |         |          |        |         |        |            |                |        |                     |              |          |
| External interface                  |                                 | 18-point terminal block   |            |                     |  |               |            |         |         |          |        |         |        |            |                |        |                     |              |          |
| External power supply               |                                 | 24 V DC (+20%, -15%)  |            |                     |  |               |            |         |         |          |        |         |        |            |                |        |                     |              |          |
|                                     |                                 | Ripple, spike 500 mV <sub>p.p</sub> or lower  |            |                     |  |               |            |         |         |          |        |         |        |            |                |        |                     |              |          |
|                                     |                                 | Inrush current: 3.9 A, 2.0 ms or shorter  |            |                     |  |               |            |         |         |          |        |         |        |            |                |        |                     |              |          |
|                                     |                                 | Current consumption: 0.13 A   |            |                     |  |               |            |         |         |          |        |         |        |            |                |        |                     |              |          |
| 5 V DC internal current consumption |                                 | 0.15 A  |            |                     |  |               |            |         |         |          |        |         |        |            |                |        |                     |              |          |
| Weight                              |                                 | 0.22 kg   |            |                     |  |               |            |         |         |          |        |         |        |            |                |        |                     |              |          |

### L60DAIL8

| Item                                |  | L60DAI18 <small>NEW</small>  |                      |               |            |
|-------------------------------------|--|--|----------------------|---------------|------------|
| Number of analog output channels    |  | 8 channels   |                      |               |            |
| Digital input                       |  | -8192...8191   |                      |               |            |
|                                     | When using the scaling function              | -32768...32767   |                      |               |            |
| Analog output                       | Current                                      | 0...20 mA DC (External load resistance value 0 Ω...600 Ω)                              |                      |               |            |
| I/O characteristics, resolution     |  |  |                      |               |            |
|                                     |  | Analog output range  |                      | Digital value | Resolution |
|                                     |  | Current  | 0...20 mA            | 0...8000      | 2500 nA    |
|                                     |  |  | 4...20 mA            |               | 2000 nA    |
|                                     | Users range setting                          | -8000...8000   | 707 nA <sup>*1</sup> |               |            |
| Accuracy <sup>*2</sup>              | Ambient temperature<br>25 ± 5°C              | ≤ ± 0.3%   |                      |               |            |
|                                     | Ambient temperature<br>0...55°C              | ≤ ± 1.0%   |                      |               |            |
| Conversion speed                    | Normal output mode                           | 200 μs/channel   |                      |               |            |
|                                     | Wave output mode                             | 200 μs/channel   |                      |               |            |
| Output short protection             |  | Protected  |                      |               |            |
| Isolation method                    |  | Between I/O terminals and programmable controller power supply: photocoupler isolation |                      |               |            |
|                                     |  | Between output channels: no isolation  |                      |               |            |
|                                     |  | Between external power supply and analog output: transformer isolation                 |                      |               |            |
| Module size allocation              |  | 2  |                      |               |            |
| Number of occupied I/O points       |  | 16 points (I/O assignment: 16 points for intelligent)                                  |                      |               |            |
| External interface                  |  | 18-point terminal block  |                      |               |            |
|                                     |  | 24 V DC (+20%, -15%)   |                      |               |            |
| External power supply               | Ripple, spike 500 mV <sub>P-P</sub> or lower |  |                      |               |            |
|                                     | Inrush current: 3.9 A, 2.0 ms or shorter     |  |                      |               |            |
|                                     | Current consumption: 0.25 A                  |  |                      |               |            |
| 5 V DC internal current consumption |  | 0.15 A   |                      |               |            |
| Weight                              |  | 0.22 kg  |                      |               |            |

\*1: Maximum resolution in the user range setting.

\*2: Accuracy for the maximum value of analog output value. Except when influenced by noise.

## Analog input/output module specifications

| Item                                |   | L60AD2DA2   |  |                      |            |                     |          |
|-------------------------------------|---|---|--|----------------------|------------|---------------------|----------|
| ■ A/D conversion part               |   |   |  |                      |            |                     |          |
| Number of analog input channels     |   | 2 channels  |  |                      |            |                     |          |
| Analog input                        | Voltage   | -10...10 V DC (Input resistance value 1 MΩ)   |  |                      |            |                     |          |
|                                     | Current   | 0...20 mA DC (Input resistance value 250 Ω)   |  |                      |            |                     |          |
| Digital output                      |   | -16384...16383  |  |                      |            |                     |          |
|                                     | When using the scaling function   | -32768...32767  |  |                      |            |                     |          |
| I/O characteristics, resolution     | Voltage   | Analog input range  |  | Digital output value | Resolution |                     |          |
|                                     |   | 0...10 V  |  | 0...16000            | 625 μV     |                     |          |
|                                     |   | 0...5 V   |  | 0...12000            | 416 μV     |                     |          |
|                                     |   | 1...5 V   |  |                      | 333 μV     |                     |          |
|                                     |   | -10...10 V  |  | -16000...16000       | 625 μV     |                     |          |
|                                     |   | 1...5 V (Extended mode)   |  | -3000...13500        | 333 μV     |                     |          |
|                                     | Current   | Users range setting   |  | -12000...12000       | 321 μV*1   |                     |          |
|                                     |   | 0...20 mA   |  | 0...12000            | 1666 nA    |                     |          |
|                                     |   | 4...20 mA   |  |                      | 1333 nA    |                     |          |
|                                     |   | 4...20 mA (Extended mode)   |  | -3000...13500        | 1333 nA    |                     |          |
|                                     |   | Users range setting   |  | -12000...12000       | 1287 nA*1  |                     |          |
|                                     |   |   |  |                      |            |                     |          |
| Accuracy*2                          | Voltage   | Analog input range  |  | Ambient temperature  |            |                     |          |
|                                     |   |   |  | 25 ± 5°C             | 0...55°C   |                     |          |
|                                     |   | 0...10 V  |  | ≤ ± 0.2%             | ≤ ± 0.3%   |                     |          |
|                                     |   | -10...10 V  |  |                      |            |                     |          |
|                                     |   | 0...5 V   |  |                      |            |                     |          |
|                                     |   | 1...5 V   |  |                      |            |                     |          |
|                                     | Current   | 1...5 V (Extended mode)   |  | ≤ ± 0.2%             | ≤ ± 0.3%   |                     |          |
|                                     |   | 0...20 mA   |  |                      |            |                     |          |
|                                     |   | 4...20 mA   |  |                      |            |                     |          |
|                                     |   | 4...20 mA (Extended mode)   |  |                      |            |                     |          |
|                                     |   |   |  |                      |            |                     |          |
|                                     |   |   |  |                      |            |                     |          |
| Conversion speed                    | Logging function  | 80 μs/channel   |  |                      |            |                     |          |
|                                     | Wave output function  | 80 μs/channel   |  |                      |            |                     |          |
|                                     | Variable conversion characteristics function                                | 100 μs/channel  |  |                      |            |                     |          |
|                                     | Variable arithmetic function  | 100 μs/channel  |  |                      |            |                     |          |
|                                     | Variable conversion characteristics function + variable arithmetic function | 160 μs/channel  |  |                      |            |                     |          |
| Absolute maximum input              |   | Voltage: ± 15 V, Current: 30 mA*3   |  |                      |            |                     |          |
| ■ D/A conversion part               |   |   |  |                      |            |                     |          |
| Number of analog output channels    |   | 2 channels  |  |                      |            |                     |          |
| Digital input                       |   | -16384...16383  |  |                      |            |                     |          |
|                                     | When using the scaling function   | -32768...32767  |  |                      |            |                     |          |
| Analog output                       | Voltage   | -10...10 V DC (External load resistance value 1k to 1M Ω)   |  |                      |            |                     |          |
|                                     | Current   | 0...20 mA DC (External load resistance value 0 to 600 Ω)  |  |                      |            |                     |          |
| I/O characteristics, resolution     | Voltage   | Analog output range   |  | Digital value        | Resolution |                     |          |
|                                     |   | 0...5 V   |  | 0...12000            | 416 μV     |                     |          |
|                                     |   | 1...5 V   |  |                      | 333 μV     |                     |          |
|                                     |   | -10...10 V  |  | -16000...16000       | 625 μV     |                     |          |
|                                     |   | Users range setting   |  | -12000...12000       | 319 μV*1   |                     |          |
|                                     |   | 0...20 mA   |  | 0...12000            | 1666 nA    |                     |          |
|                                     | Current   | 4...20 mA   |  |                      | 1333 nA    |                     |          |
|                                     |   | Users range setting   |  | -12000...12000       | 696 nA*1   |                     |          |
|                                     |   |   |  |                      |            |                     |          |
|                                     |   | Accuracy*2  | Voltage                                      | Analog output range  |            | Ambient temperature |          |
|                                     |   |   |  |                      |            | 25 ± 5°C            | 0...55°C |
|                                     |   |   |  | 0...5 V              |            | ≤ ± 0.2%            | ≤ ± 0.4% |
| 1...5 V                             |   |   |  |                      |            |                     |          |
| -10...10 V                          |   |   |  |                      |            |                     |          |
| 0...20 mA                           |   |   |  |                      |            |                     |          |
| Current                             | 4...20 mA   |   | ≤ ± 0.2%                                     | ≤ ± 0.4%             |            |                     |          |
|                                     | 4...20 mA (Extended mode)   |   |  |                      |            |                     |          |
|                                     |   |   |  |                      |            |                     |          |
|                                     |   |   |  |                      |            |                     |          |
|                                     |   |   |  |                      |            |                     |          |
|                                     |   |   |  |                      |            |                     |          |
| Conversion speed                    | Normal output   | 80 μs/channel   |  |                      |            |                     |          |
|                                     | Wave output function  | 80 μs/channel   |  |                      |            |                     |          |
|                                     | Variable conversion characteristics function                                | 100 μs/channel  |  |                      |            |                     |          |
|                                     | Variable arithmetic function  | 100 μs/channel  |  |                      |            |                     |          |
|                                     | Variable conversion characteristics function + variable arithmetic function | 320 μs/2 channels*4   |  |                      |            |                     |          |
| Output short protection             |   | Protected   |  |                      |            |                     |          |
| ■ Common part                       |   |   |  |                      |            |                     |          |
| Isolation method                    |   | Between I/O terminals and programmable controller power supply: photocoupler isolation<br>Between output channels: no isolation<br>Between external power supply and analog output: transformer isolation |  |                      |            |                     |          |
| Module size allocation              |   | 1   |  |                      |            |                     |          |
| Number of occupied I/O points       |   | 16 points (I/O assignment: 16 points for intelligent)   |  |                      |            |                     |          |
| External interface                  |   | 18-point terminal block   |  |                      |            |                     |          |
| External power supply               |   |   | 24 V DC (+ 20%/ -15%)                        |                      |            |                     |          |
|                                     |   |   | Ripple, spike 500 mV <sub>P-P</sub> or lower |                      |            |                     |          |
|                                     |   |   | Inrush current: 3.5 A, 1000 μs or shorter    |                      |            |                     |          |
|                                     |   |   | Current consumption: 0.12 A                  |                      |            |                     |          |
| 5 V DC internal current consumption |   | 0.17 A  |  |                      |            |                     |          |
| Weight                              |   | 0.22 kg   |  |                      |            |                     |          |

\*1: Maximum resolution in the user range setting.

\*2: Accuracy for the maximum value of the digital /analog output value. Except when influenced by noise.

\*3: A momentary current value which does not cause damage to internal resistors of the module, although the maximum continuous input current 24 mA.

\*4: When the variable arithmetic function or the variable conversion characteristics function + variable arithmetic function is used, the operation speed for polynomial expressions is 320 μs. Since each operation result of two polynomial expressions is output on each D/A conversion channel, D/A conversion is executed at intervals of 320 μs regardless of the number of conversion enabled channels.

## Temperature input module specifications

| Item   |   | L60RD8  |                               |
|--|---|---|-------------------------------|
| Number of analog input channels                |   | 8 channels  |                               |
| Output   | Temperature measured value                    | -3280...15620   |                               |
|  | Digital operation value                       | -32768...32767  |                               |
| Applicable RTD                                 |   | 9 types<br>Pt1000, Pt100, JPt100, Pt50, Ni500, Ni120, Ni100, Cu100, Cu50  |                               |
| Measured temperature range, accuracy*1         |   | (Accuracy) = (Conversion accuracy) + (Allowable difference of RTD used)   |                               |
| Temperature detecting output current*2         | 1 mA  | Pt100, JPt100, Pt50, Ni120, Ni100, Cu100, Cu50  |                               |
|  | 100 μA  | Pt1000, Ni500   |                               |
| Resolution*3                                   |   | 0.1°C   |                               |
| Conversion speed                               |   | 40 ms/ch  |                               |
| Number of 2-point sensor compensation settings |   | 10000 times maximum   |                               |
| Isolation method                               |   | Between input terminals and programmable controller power supply: Photocoupler<br>Between input channels: Non-isolation |                               |
| Module size allocation                         |   | 1   |                               |
| Number of occupied I/O points                  |   | 16 points (I/O assignment: Intelligent 16 points)   |                               |
| External interface                             |   | 24-point spring clamp terminal block  |                               |
| Applicable cable type*4                        |   | Solid wire, stranded wire, bar solderless terminal  |                               |
| Applicable wire size                           | Core  | 0.5...1.5 mm² (AWG24...16)  |                               |
|  | Terminal hole size                            | 2.4 mm×1.5 mm   |                               |
| Applicable solderless terminal                 | Al 0.5-10WH [Applicable wire size: 0.5 mm²]   |   | PHOENIX CONTACT GmbH & Co. KG |
|  | Al 0.75-10GY [Applicable wire size: 0.75 mm²] |   |                               |
|  | A 1-10 [Applicable wire size: 1.0 mm²]        |   |                               |
|  | A 1.5-10 [Applicable wire size: 1.5 mm²]      |   |                               |
| Wire strip length                              |   | 10 mm   |                               |
| 5 V DC internal current consumption            |   | 0.22 A  |                               |
| Weight   |   | 0.15 kg   |                               |

\*1: The following table shows RTD types and values for each item.

| RTD type | Celsius                    |  |  | Fahrenheit                 |  |  |
|----------|----------------------------|--|--|----------------------------|--|--|
|          | Measured temperature range | Conversion accuracy  |  | Measured temperature range | Conversion accuracy  |  |
|          |                            | Operating ambient temperature<br>25±5°C                      | Operating ambient temperature<br>0...55°C                    |                            | Operating ambient temperature<br>25±5°C                      | Operating ambient temperature<br>0...55°C                    |
| Pt100    | -20...120°C                | ±0.6°C   | ±2.0°C   | -4...248°F                 | ±1.1°F   | ±3.6°F   |
|          | -200...850°C               | Specified temperature ×±0.3% or ±0.8°C, whichever is greater | Specified temperature ×±0.8% or ±2.7°C, whichever is greater | -328...1562°F              | Specified temperature ×±0.3% or ±1.5°F, whichever is greater | Specified temperature ×±0.8% or ±4.9°F, whichever is greater |
| JPt100   | -20...120°C                | ±0.6°C   | ±2.0°C   | -4...248°F                 | ±1.1°F   | ±3.6°F   |
|          | -200...600°C               | Specified temperature ×±0.3% or ±0.8°C, whichever is greater | Specified temperature ×±0.8% or ±2.7°C, whichever is greater | -328...1112°F              | Specified temperature ×±0.3% or ±1.5°F, whichever is greater | Specified temperature ×±0.8% or ±4.9°F, whichever is greater |
| Pt1000   | -200...850°C               | Specified temperature ×±0.3% or ±0.8°C, whichever is greater | Specified temperature ×±0.8% or ±2.7°C, whichever is greater | -328...1562°F              | Specified temperature ×±0.3% or ±1.5°F, whichever is greater | Specified temperature ×±0.8% or ±4.9°F, whichever is greater |
| Pt50     | -200...650°C               | Specified temperature ×±0.3% or ±0.8°C, whichever is greater | Specified temperature ×±0.8% or ±4.1°C, whichever is greater | -328...1202°F              | Specified temperature ×±0.3% or ±1.5°F, whichever is greater | Specified temperature ×±0.8% or ±7.4°F, whichever is greater |
| Ni100    | -60...250°C                | ±0.6°C   | Specified temperature ×±0.8% or ±1.4°C, whichever is greater | -76...482°F                | ±1.1°F   | Specified temperature ×±0.8% or ±2.6°F, whichever is greater |
| Ni120    | -60...250°C                | ±0.6°C   | Specified temperature ×±0.8% or ±1.4°C, whichever is greater | -76...482°F                | ±1.1°F   | Specified temperature ×±0.8% or ±2.6°F, whichever is greater |
| Ni500    | -60...250°C                | ±0.6°C   | Specified temperature ×±0.8% or ±1.4°C, whichever is greater | -76...482°F                | ±1.1°F   | Specified temperature ×±0.8% or ±2.6°F, whichever is greater |
| Cu100    | -180...200°C               | ±0.8°C   | ±2.7°C   | -292...392°F               | ±1.5°F   | ±4.9°F   |
| Cu50     | -180...200°C               | ±0.8°C   | ±2.7°C   | -292...392°F               | ±1.5°F   | ±4.9°F   |


\*2: Current is output only on channels in which conversion is being performed.

\*3: When the standard product (L60MD4-G) is replaced by this module, the resolution of Pt100 (-20 to 120°C) and JPt100 (-20 to 120°C) is different.

\*4: When a stranded wire is used, attach a bar solderless terminal.



## Temperature Control Modules

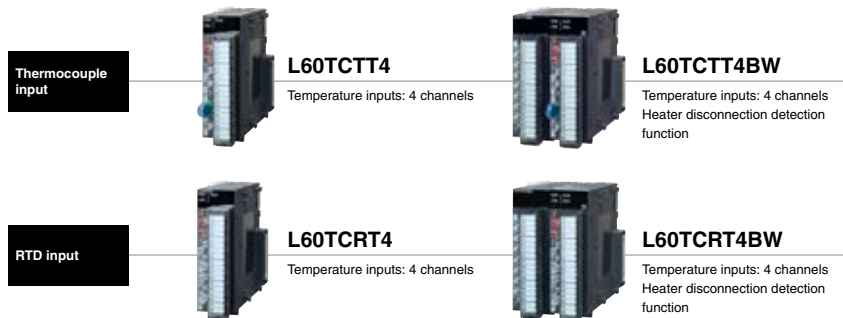

| Function                                | L60TCTT4           | L60TCTT4BW | L60TCRT4  | L60TCRT4BW |
|---|--------------------|------------|-----------|------------|
|   | Thermocouple input |            | RTD input |            |
| Standard control                        | ●                  | ●          | ●         | ●          |
| Heating-cooling control                 | ●                  | ●          | ●         | ●          |
| Self-tuning function                    | ●                  | ●          | ●         | ●          |
| Peak current suppression function       | ●                  | ●          | ●         | ●          |
| Simultaneous temperature rise function  | ●                  | ●          | ●         | ●          |
| Selectable sampling cycle               | ●                  | ●          | ●         | ●          |
| Temperature input mode                  | ●                  | ●          | ●         | ●          |
| Temperature control mode                | ●                  | ●          | ●         | ●          |
| Heater disconnection detection function | —                  | ●          | —         | ●          |

## Highly stable temperature control

### Standard control/heating and cooling control


Prevent overheating and overcooling in devices that require a high level of temperature stability, such as in an extrusion molding machine.

The following control methods can be selected according to the target device.

- Standard control (heating or cooling)
- Heating/cooling control (heating and cooling)
- Mix control (combination of standard control and heating-cooling control)


#### ■ Example: Standard control (heating only)

The temperature of the object is controlled by adjusting the heater output based on the PID calculations resulting from the temperature sensor input.

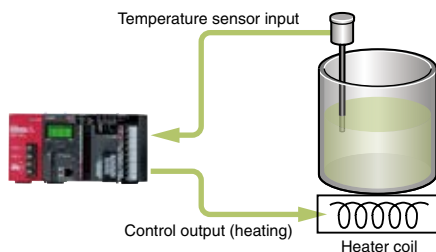

#### ■ Example: Heating-cooling control

**(heating and cooling elements controlled simultaneously)**  
Heating is performed when the control object's temperature is lower than the target temperature, and cooling is performed when it is hotter or the humidity needs to be reduced.

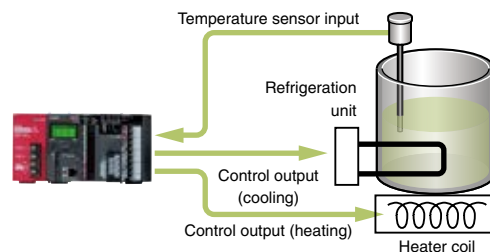

## Reduce running costs by taking advantage of the energy-saving effect


### Peak current control function

The peak current control function reduces the peak current by automatically changing the upper-output limit value for each channel, while dividing the transistor output timing\*. The energy conserved by reducing the peak current, such as a reduction in system power capacity and reduction in contracted power, can help to reduce running costs.


\*1: The timing can be split between two to four outputs.

When two or more loads are being controlled, the peak current can be minimized by spreading the total load out over time.

#### ■ Without peak current control function

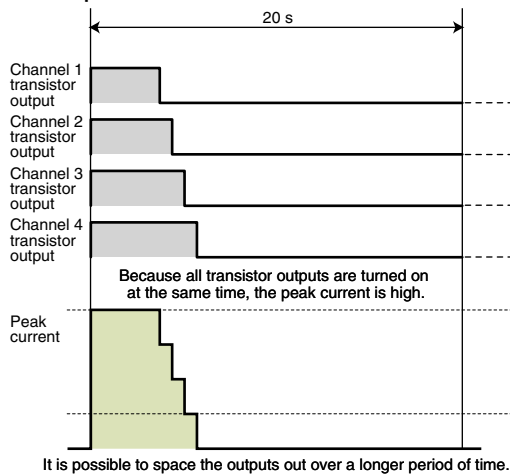

#### ■ With peak current control function

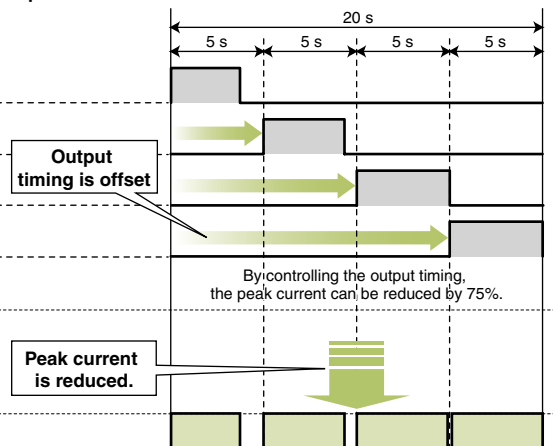

## Ensures uniform temperature control



### Simultaneous temperature rise function

Ensures uniform temperature control by synchronizing the temperature arrival times from multiple loops.

Perform a uniform temperature rise using two or more control loops without going over temperature or resulting in unexpected thermal expansion.


A "no idling" format increases energy efficiency and reduces running costs.

■ Example: Temperature control of injection molding machine ■ Example: Wafer heating process for semiconductor manufacturing

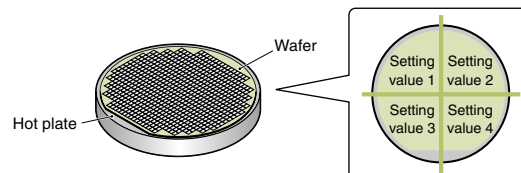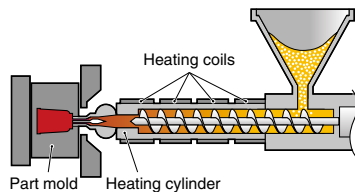


The running costs is reduced!

#### ■ Without the simultaneous temperature rise function

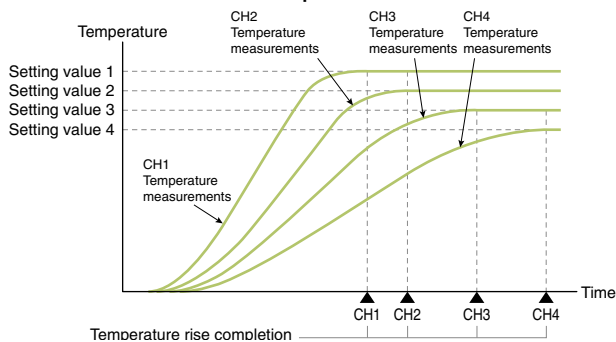

#### ■ With the simultaneous temperature rise function

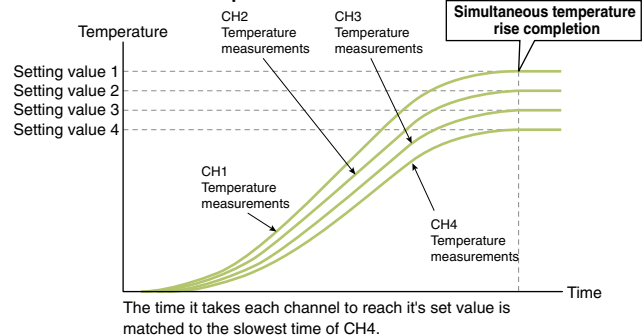

Using this function, it is possible to coordinate the control of two or more loops to reach their target values (SV) at the same time. Control the simultaneous rise in temperature of separate loops by setting a channel group (Max. 2 groups). This is an effective way to control applications where differing target temperature arrival times can result in undesirable temperature differentials.

## Specifications

| Item  |  |  | L60TCTT4  | L60TCTT4BW   | L60TCRT4                 | L60TCRT4BW   |
|---|--|--|---|--|--------------------------|--|
| Control output                                |  |  | Transistor output   |  |                          |  |
| Number of temperature input channels          |  |  | 4 channels  |  |                          |  |
| Applicable temperature sensors                |  |  | Thermocouple  |  | Resistive thermal device |  |
| Accuracy*1                                    | Indication accuracy  | Ambient temperature: 25 ± 5°C                  | Full scale × (± 0.3%)   |  |                          |  |
|   |  | Ambient temperature: 0...55°C                  | Full scale × (± 0.7%)   |  |                          |  |
|   | Cold junction temperature compensation accuracy: (ambient temperature: 0...55°C) | Temperature process value (PV): -100°C or more | ≤ ± 1.0°C   |  | —                        |  |
|   |  | Temperature process value (PV): -150...-100°C  | ≤ ± 2.0°C   |  |                          |  |
|   |  | Temperature process value (PV): -200...-150°C  | ≤ ± 3.0°C   |  |                          |  |
| Sampling cycle                                |  |  | 250 ms/4 channels<br>500 ms/4 channels  |  |                          |  |
| Control output cycle                          |  |  | 0.5...100.0 s   |  |                          |  |
| Input impedance                               |  |  | 1 MΩ  |  |                          |  |
| Input filter                                  |  |  | 0...100 s (0: Input filter OFF)   |  |                          |  |
| Sensor correction value setting               |  |  | -50.00...50.00%   |  |                          |  |
| Operation at sensor input disconnection       |  |  | Upscale processing  |  |                          |  |
| Temperature control method                    |  |  | PID ON/OFF pulse or two-position control  |  |                          |  |
| PID constants range                           | PID constants setting  |  | Can be set by auto tuning.  |  |                          |  |
|   | Proportional band (P)  |  | 0.0...1000.0% (0: Two-position control)   |  |                          |  |
|   | Integral time (I)  |  | 0...3600 s (set 0 for P control and PD control.)  |  |                          |  |
|   | Derivative time (D)  |  | 0...3600 s (set 0 for P control and PI control.)  |  |                          |  |
| Set value (SV) setting range                  |  |  | Within the temperature range set in the thermocouple/platinum resistance thermometer to be used   |  |                          |  |
| Dead band setting range                       |  |  | 0.1...10.0%   |  |                          |  |
| Transistor output                             | Output signal  |  | ON/OFF pulse  |  |                          |  |
|   | Rated load voltage   |  | 10...30 V DC  |  |                          |  |
|   | Max. load current  |  | 0.1 A/point, 0.4 A/common   |  |                          |  |
|   | Max. inrush current  |  | 0.4 A 10 ms   |  |                          |  |
|   | Leakage current at OFF   |  | ≤ 0.1 mA  |  |                          |  |
|   | Max. voltage drop at ON  |  | 1.0 V DC (TYP) at 0.1 A 2.5 V DC (MAX) at 0.1 A   |  |                          |  |
|   | Response time  |  | OFF→ON: ≤ 2 ms, ON→OFF: ≤ 2 ms  |  |                          |  |
| Number of accesses to non-volatile memory     |  |  | Max. 10 <sup>12</sup> times   |  |                          |  |
| Isolation method                              |  |  | Between input terminal and programmable controller power supply: Transformer isolation<br>Between input channels: Transformer isolation |  |                          |  |
| Heater disconnection detection specifications | Current sensor   |  | —   | • CTL-12-S36-10 (0.0...100.0 A)*2<br>• CTL-12-S56-10 (0.0...100.0 A)*2<br>• CTL-6-P-H (0.00...20.00 A)*2 | —                        | • CTL-12-S36-10 (0.0...100.0 A)*2<br>• CTL-12-S56-10 (0.0...100.0 A)*2<br>• CTL-6-P-H (0.00...20.00 A)*2 |
|   |  |  |   | Full scale × (± 1.0%)  |                          | Full scale × (± 1.0%)  |
|   | Input accuracy   | 3...255  |   | 3...255  |                          |  |
| Number of alert delay                         |  |  |   |  |                          |  |
| Module size allocation                        |  |  | 1   | 2  | 1                        | 2  |
| Number of occupied I/O points                 |  |  | 16 points (I/O assignment: Intelligent 16 points)   |  |                          |  |
| External interface                            |  |  | 18-point terminal block   | 18-point terminal block × 2  | 18-point terminal block  | 18-point terminal block × 2  |
| 5 V DC internal current consumption           |  |  | 0.30 A  | 0.33 A   | 0.31 A                   | 0.35 A   |
| Weight  |  |  | 0.18 kg   | 0.33 kg  | 0.18 kg                  | 0.33 kg  |

\*1: Calculate the accuracy in the following method (only when it is not affected by noise).

Accuracy (°C) = full scale × indication accuracy + cold junction temperature compensation accuracy

Ex.) Accuracy at the input range of 38 (-200.0 to 400.0°C), the operating ambient temperature of 35°C, and the temperature process value (PV) of 300°C

(Full scale) × (indication accuracy) + cold junction temperature compensation accuracy

= (400.0°C - (-200.0°C)) × (±0.007) + (±1.0°C)

= ± 5.2°C

\*2: U.R.D.Co., LTD. For more information, visit <http://www.u-rd.com>

## Control mode


| Control mode                            | Contents  | Number of controllable loops                                |
|---|---|---|
| Standard control                        | Performs the standard control of four channels.   | Standard control 4 loops                                    |
| Heating-cooling control (normal mode)   | Performs the heating-cooling control. CH3 and CH4 cannot be used.   | Heating-cooling control 2 loops                             |
| Heating-cooling control (expanded mode) | Performs the heating-cooling control. The number of loops is expanded using an output module and others in the system.                          | Heating-cooling control 4 loops                             |
| Mix control (normal mode)               | Performs the standard control and the heating-cooling control. CH2 cannot be used.  | Standard control 2 loops<br>Heating-cooling control 1 loop  |
| Mix control (expanded mode)             | Performs the standard control and the heating-cooling control. The number of loops is expanded using an output module and others in the system. | Standard control 2 loops<br>Heating-cooling control 2 loops |

Control for each channel is as follows.

| Channel | Standard control | Heating-cooling control |                           | Mix control             |                           |
|---------|------------------|-------------------------|---------------------------|-------------------------|---------------------------|
|         |                  | Normal mode             | Expanded mode             | Normal mode             | Expanded mode             |
| CH1     | Standard control | Heating-cooling control | Heating-cooling control   | Heating-cooling control | Heating-cooling control   |
| CH2     | Standard control | Heating-cooling control | Heating-cooling control   | —*3                     | Heating-cooling control*4 |
| CH3     | Standard control | —*3                     | Heating-cooling control*4 | Standard control        | Standard control          |
| CH4     | Standard control | —*3                     | Heating-cooling control*4 | Standard control        | Standard control          |

\*3: Only temperature measurement using a temperature input terminal can be performed.

\*4: Heating-cooling control is performed using an output module in the system.

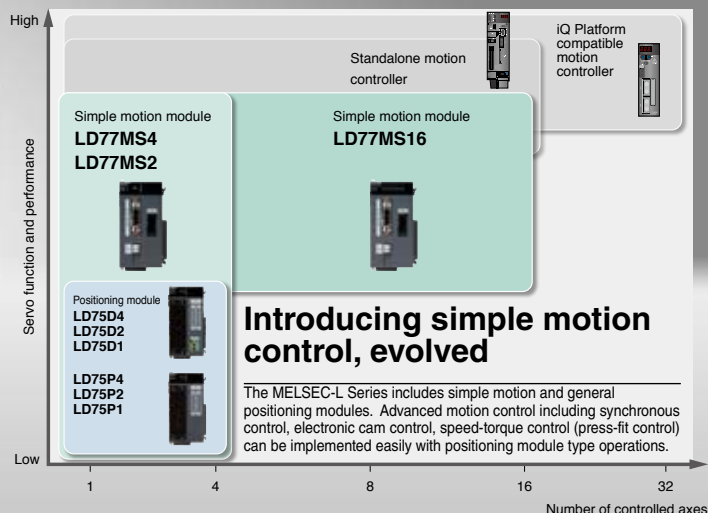

## Simple Motion Modules

SSCNET III/H-compatible



### LD77MS2

Number of control axes: 2 axes  
Communication cycle: 150 Mbps  
Positioning data: 600 data/axis  
Max. connection distance: 100 m



### LD77MS4

Number of control axes: 4 axes  
Communication cycle: 150 Mbps  
Positioning data: 600 data/axis  
Max. connection distance: 100 m



### LD77MS16

Number of control axes: 16 axes  
Communication cycle: 150 Mbps  
Positioning data: 600 data/axis  
Max. connection distance: 100 m



\*SSCNET(Servo System Controller NETwork)

| Function                                  | LD77MS2            | LD77MS4    | LD77MS16   |
|---|--------------------|------------|------------|
| Positioning control function              | ●                  | ●          | ●          |
| Speed/torque control function             | ●                  | ●          | ●          |
| Linear interpolation                      | 2 axes             | 2/3/4 axes | 2/3/4 axes |
| Circular interpolation                    | 2 axes             | 2 axes     | 2 axes     |
| Synchronous control function              | External encoder   | ●          | ●          |
|   | Cam                | ●          | ●          |
|   | Phase compensation | ●          | ●          |
| Manual pulse generator operation function | ●                  | ●          | ●          |
| OPR Control                               | ●                  | ●          | ●          |

## Positioning Modules

Open collector output



### LD75P1

Number of control axes: 1 axis  
Max. output pulses: 200K pulses/s  
Positioning data: 600 data/axis  
Max. connection distance: 2 m



### LD75P2

Number of control axes: 2 axis  
Max. output pulses: 200K pulses/s  
Positioning data: 600 data/axis  
Max. connection distance: 2 m



### LD75P4

Number of control axes: 4 axis  
Max. output pulses: 200K pulses/s  
Positioning data: 600 data/axis  
Max. connection distance: 2 m

Differential output



### LD75D1

Number of control axes: 1 axis  
Max. output pulses: 4M pulse/s  
Positioning data: 600 data/axis  
Max. connection distance: 10 m



### LD75D2

Number of control axes: 2 axis  
Max. output pulses: 4M pulse/s  
Positioning data: 600 data/axis  
Max. connection distance: 10 m



### LD75D4

Number of control axes: 4 axis  
Max. output pulses: 4M pulse/s  
Positioning data: 600 data/axis  
Max. connection distance: 10 m

| Function                     | LD75P1                | LD75P2 | LD75P4     | LD75D1              | LD75D2 | LD75D4     |
|------------------------------|-----------------------|--------|------------|---------------------|--------|------------|
|                              | Open collector output |        |            | Differential output |        |            |
| Positioning control function | ●                     | ●      | ●          | ●                   | ●      | ●          |
| Speed control function       | ●                     | ●      | ●          | ●                   | ●      | ●          |
| Linear interpolation         | —                     | 2 axes | 2/3/4 axes | —                   | 2 axes | 2/3/4 axes |
| Circular interpolation       | —                     | 2 axes | 2 axes     | —                   | 2 axes | 2 axes     |
| Helical interpolation        | —                     | —      | 3 axes     | —                   | —      | 3 axes     |
| OPR Control                  | ●                     | ●      | ●          | ●                   | ●      | ●          |


## Countless applications are possible

LD77MS□

A variety of control types including positioning control, speed-torque control, synchronous control and electronic cam control can be implemented easily with simple parameter settings and a sequence program.


### Positioning control

- Support for a multitude of applications thanks to a wide variety of control formats including linear interpolation control (up to 4 axes), 2-axis circular interpolation control, fixed feed control and continuous orbit control.
- Use a sequence program to set the positioning address, speed, etc. for easy automatic operation.
- Quickly implement powerful auxiliary functions such as step operation, target position change, M codes, and the skip function.

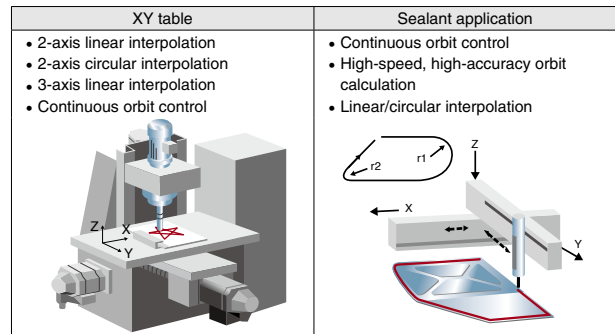

### Speed-torque control

- Tension control applications such as winding and rewinding are supported.
  - Switch from positioning control, to speed-torque control, and back to positioning control.
- Because the present location is tracked even in speed-torque control mode, it is possible to maintain the current absolute position when returning to positioning control.


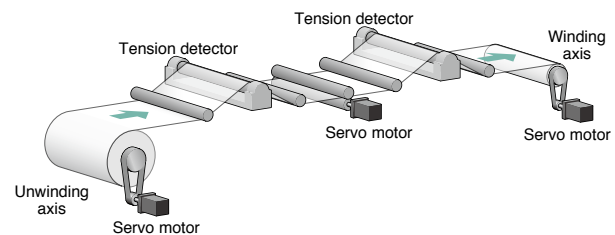


### Synchronous control and electronic cam control

- Electronic cam control may be used alone or combined with synchronous control.

#### Example application for electronic cam control:

To create a movement path around a workpiece using positioning control, axis 2 waits for axis 1 to complete the move from P1 to P2 before it begins moving from P2 to P3. By using electronic cam control, axis 2 does not need to wait for axis 1 to complete its movement and the in position time can be shortened.

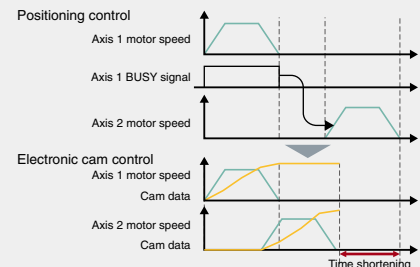

## Many functions in a compact design

LD77MS□

### Use a synchronous encoder with synchronous control


- Input pulses from a synchronous encoder can be used to perform synchronous control and electronic cam control.
- The incremental synchronous encoder can be used by using the LD77MS built-in interface. An option unit is not required.
- To further improve the synchronization accuracy, the phase compensation function, designed to compensate for synchronous encoder delays, can be used.

### Standard mark detection function

- The built-in mark detection signal interface allows these units to be used in packaging systems for example, without additional option modules.

### Automatic cam data generation for rotary cutter

- Complicated cam data for rotary cutters can be automatically generated just by specifying a few parameters like the sheet length and synchronization width.

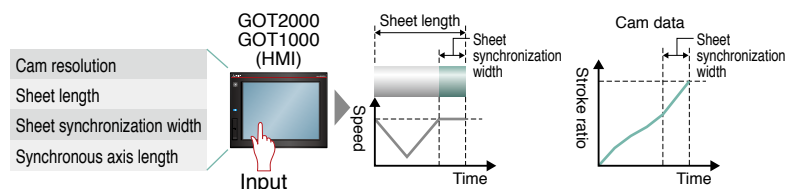


## Perfect synchronous control is easy to achieve

LD77MS□

Replace mechanical gears, shafts, speed change gears, cams, etc. and generate synchronous control operations using software.

- Complicated programs are unnecessary for synchronous control because it can be implemented easily using parameter settings.
- Start and stop synchronous control for each axis. Use the synchronous control axis and positioning control axis together.
- Convey the travel value of main shaft to the output axis via the clutch.

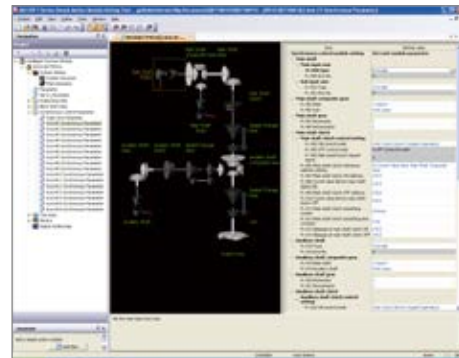


Synchronous Control Parameter Settings

## Cam control made simple


LD77MS□

Create cam data patterns easily.

- Create cam profiles unrestricted by existing concepts of electronic cam control.
- Change the acceleration, speed, stroke, and jerk while simultaneously seeing how it effects the profile.
- Easily check created cam data by viewing them as thumbnails.
- Import and export cam data in CSV format.

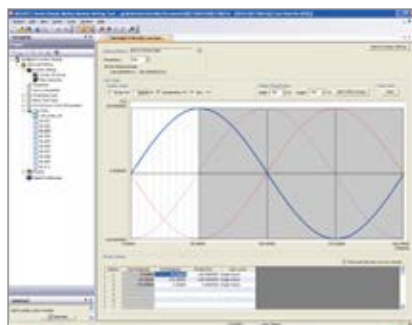

Cam Data

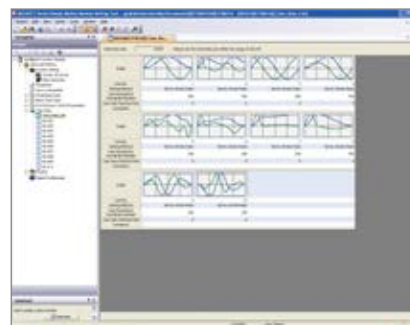


Cam Data List

## Simplified debugging and commissioning

LD77MS□

### Digital oscilloscope function


- Collection of data from the simple motion module is synchronized with the operation cycle and waveform displays to facilitate an efficient start up.
- The assistant function explains each step.
- Use the purpose-based probe setting to easily set frequently-viewed data.
- Sample 16CH word and 16CH bit data and display 8CH words and 8CH bits in real time.

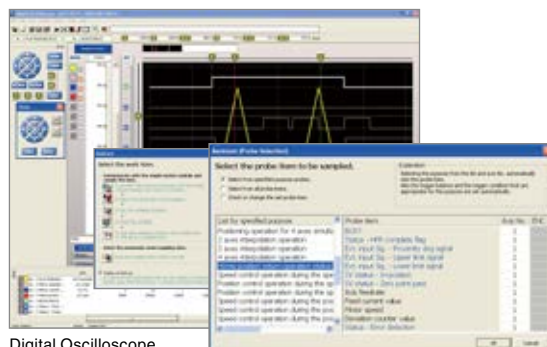

Digital Oscilloscope

### Monitor and test functions

- Complete the system installation and perform operational checks easily using powerful monitor and test functions.
- Select items to be displayed on the monitor using a wealth of information monitoring options.
- The test function can be used to check basic operations without a sequence program.

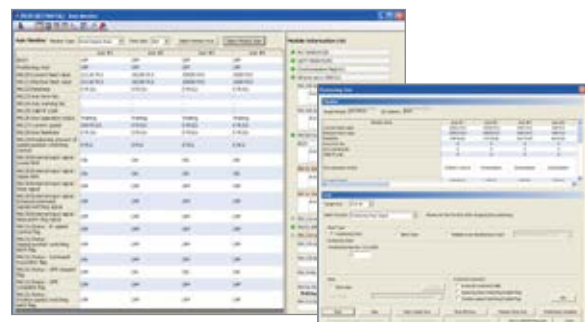

Axis Monitor

Positioning Test



## Specifications

| Item   |  | LD77MS2  | LD77MS4  | LD77MS16    |
|--|--|--|--|-------------|
| Number of control axes (Virtual servo amplifier axis included) |  | 2 axes   | 4 axes   | 16 axes     |
| Operation cycle (Operation cycle settings) *1                  |  | 0.88 ms/1.77 ms  |  |             |
| Interpolation function   |  | 2-axis linear interpolation,<br>2-axis circular interpolation  | 2-axis/3-axis/4-axis linear interpolation, 2-axis circular interpolation |             |
| Control modes  |  | PTP (Point To Point) control, Trajectory control (both linear and arc can be set), Speed control, Speed-position switching control, Position-speed switching control, Speed-torque control |  |             |
| Acceleration/deceleration process                              |  | Trapezoidal acceleration/deceleration, S-curve acceleration/deceleration   |  |             |
| Compensation function  |  | Backlash compensation, Electronic gear, Near pass function   |  |             |
| Synchronous control  |  | Synchronous encoder input, Cam, Phase Compensation, Cam auto-generation  |  |             |
| Control unit   |  | mm, inch, degree, pulse  |  |             |
| Positioning data   |  | 600 data (positioning data No. 1...600)/axis (Can be set with MELSOFT GX Works2 or Sequence program.)  |  |             |
| Backup   |  | Parameters, positioning data, and block start data can be saved on flash ROM (battery-less backup)   |  |             |
| OPR control  | OPR method   | Near-point dog method, Count method 1, Count method 2, Data set method, Scale home position signal detection method  |  |             |
|  | Fast OPR control   | ●  |  |             |
|  | Sub functions  | OPR retry, OP shift  |  |             |
| Position control   | Linear control   | 1-axis linear control, 2-axis linear interpolation control, 3-axis linear interpolation control, 4-axis linear interpolation control*2 (Composite speed, Reference axis speed)             |  |             |
|  | Fixed-pitch feed control                                   | 1-axis fixed-pitch feed, 2-axis fixed-pitch feed, 3-axis fixed-pitch feed, 4-axis fixed-pitch feed   |  |             |
|  | 2-axis circular interpolation                              | Sub point designation, center point designation  |  |             |
|  | Speed control  | 1-axis speed control, 2-axis speed control, 3-axis speed control, 4-axis speed control   |  |             |
|  | Speed-position switching control                           | INC mode, ABS mode   |  |             |
|  | Position-speed switching control                           | INC mode   |  |             |
|  | Current value changing                                     | Positioning data, Start No. for a current value changing   |  |             |
|  | NOP instruction  | ●  |  |             |
|  | JUMP instruction   | Unconditional JUMP, Conditional JUMP   |  |             |
|  | LOOP, LEND   | ●  |  |             |
| Manual control   | High-level positioning control                             | Block start, Condition start, Wait start, Simultaneous start, Repeated start   |  |             |
|  | JOG operation  | ●  |  |             |
|  | Inching operation  | ●  |  |             |
|  | Manual pulse generator operation                           | Possible to connect 1 module (Incremental) Unit magnification (1...10000 times)  |  |             |
| Expansion control  | Speed-torque control                                       | Speed control without positioning loops, Torque control, Tightening & press-fit control*3  |  |             |
| Absolute position system                                       |  | Made compatible by setting battery to servo amplifier  |  |             |
| Synchronous encoder interface                                  |  | Up to 4 channels (Total of the internal interface, via PLC CPU interface, and servo amplifier interface*3)   |  |             |
| Functions that limit control                                   | Internal interface   | 1 channel (Incremental)  |  |             |
|  | Speed limit function                                       | Speed limit value, JOG speed limit value   |  |             |
|  | Torque limit function                                      | Torque limit value_same setting, torque limit value_individual setting   |  |             |
|  | Forced stop  | Valid/invalid setting  |  |             |
|  | Software stroke limit function                             | Movable range check with current feed value, movable range check with machine feed value   |  |             |
|  | Hardware stroke limit function                             | ●  |  |             |
| Functions that change control details                          | Speed change function                                      | ●  |  |             |
|  | Override function  | ●  |  |             |
|  | Acceleration/deceleration time change function             | ●  |  |             |
|  | Torque change function                                     | ●  |  |             |
|  | Target position change function                            | Target position address and speed to target position are changeable  |  |             |
| Other functions  | M code output function                                     | ●  |  |             |
|  | Step function  | Deceleration unit step, Data No. unit step   |  |             |
|  | Skip function  | Via PLC CPU, Via external command signal   |  |             |
|  | Teaching function  | ●  |  |             |
| Mark detection function  |  | Continuous Detection mode, Specified Number of Detections mode, Ring Buffer mode   |  |             |
|  | Mark detection signal                                      | 2 points   | 4 points   |             |
|  | Mark detection setting                                     | 4 settings   |  | 16 settings |
| Optional data monitor function                                 |  | 4 points/axis  |  |             |
| Driver communication function                                  |  | ●  |  |             |
| Amplifier-less operation function                              |  | ●  |  |             |
| Digital oscilloscope function*4                                | Bit data   | 8 ch   |  | 16 ch       |
|  | Word data  | 4 ch   |  | 16 ch       |
| Starting time*5  | 1-axis linear control                                      | 0.88 ms  | 0.88 ms  | 1.77 ms     |
|  | 1-axis speed control                                       |  |  |             |
|  | 2-axis linear interpolation control (Composite speed)      |  |  |             |
|  | 2-axis linear interpolation control (Reference axis speed) |  |  |             |
|  | 2-axis circular interpolation control                      |  |  |             |
|  | 2-axis speed control                                       | -  | 0.88 ms  | 1.77 ms     |
|  | 3-axis linear interpolation control (Composite speed)      |  |  |             |
|  | 3-axis linear interpolation control (Reference axis speed) |  |  |             |
|  | 3-axis speed control                                       |  |  |             |
|  | 4-axis linear interpolation control                        |  |  |             |
| 4-axis speed control   |  |  |  |             |
| Maximum distance between stations [m (ft.)]                    |  | 100 m  |  |             |
| Module size allocation   |  | 2  |  |             |
| Number of occupied I/O points                                  |  | 32 points (I/O assignment: Intelligent 32 points)  |  |             |
| Servo amplifier connection system                              |  | SSCNET Ⅲ/H (1 system)  |  |             |
| 5 V DC internal current consumption                            |  | 0.55 A   |  | 0.7 A       |
| Weight   |  | 0.22 ka  |  |             |

\*1: Default value is 1.77 ms. If necessary, check the operation time and change to 0.88 ms.

\*2: 4-axis linear interpolation control is enabled only at the reference axis speed.

\*3: QD77MS and LD77MS only.

\*4: 8CH word data and 8CH bit data can be displayed in real time.

\*5: Time from accepting the positioning start signal until BUSY signal turns ON

## Specifications

| Item  |                            |   | LD75P1/LD75D1 <sup>1)</sup>   | LD75P2/LD75D2 <sup>1)</sup>                                   | LD75P4/LD75D4 <sup>1)</sup>  |
|---|----------------------------|---|---|---|--|
| Number of control axes                          |                            |   | 1 axis  | 2 axes  | 4 axes   |
| Interpolation function                          |                            |   | —   | 2-axis linear interpolation,<br>2-axis circular interpolation | 2-axis/3-axis/4-axis linear interpolation,<br>2-axis circular interpolation,<br>3-axis helical interpolation |
| Control system                                  |                            |   | PTP (Point To Point) control, Path control (linear, arc and helical can be set),<br>Speed control, Speed-position switching control, Position-speed switching control |   |  |
| Control unit                                    |                            |   | mm, inch, degree, pulse   |   |  |
| Positioning data                                |                            |   | 600 data (positioning data No.1...600) /axis<br>(Can be set with peripheral device or sequence program.)  |   |  |
| Backup  |                            |   | Parameters, positioning data, and block start data can be saved on flash ROM (battery-less backup)  |   |  |
| Positioning control                             | Positioning control system | PTP*2 control   | Increment system, absolute system   |   |  |
|   |                            | Speed-position switching control  | Increment system, absolute system*3   |   |  |
|   |                            | Position-speed switching control  | Increment system  |   |  |
|   |                            | Path control  | Increment system, absolute system   |   |  |
|   | Positioning control range  | In absolute system  | -214748364.8...214748364.7 (μm)<br>-21474.83648...21474.83647 (inch)<br>0...359.99999 (degree)<br>-2147483648...2147483647 (pulse)                                    |   |  |
|   |                            |   | -214748364.8...214748364.7 (μm)<br>-21474.83648...21474.83647 (inch)<br>-21474.83648...21474.83647 (degree)<br>-2147483648...2147483647 (pulse)                       |   |  |
|   |                            | In increment system   | 0...214748364.7 (μm)<br>0...21474.83647 (inch)<br>0...21474.83647 (degree)<br>0...2147483647 (pulse)  |   |  |
|   |                            |   | 0...359.99999 (degree)  |   |  |
|   |                            | In speed-position switching control (INC mode)/<br>position-speed switching control | 0.01...2000000.00 (mm/min)<br>0.001...2000000.000 (inch/min)<br>0.001...2000000.000 (degree/min)<br>1...4000000 (pulse/s)   |   |  |
|   |                            |   | Trapezoidal acceleration/deceleration, S-curve acceleration/deceleration  |   |  |
|   | Speed command              | 1...8388608 ms  |   |   |  |
|   |                            | Four patterns can be set for each of acceleration time and deceleration time        |   |   |  |
|   |                            | 1...8388608 ms  |   |   |  |
|   | OPR method                 |   |   | 6 types   |  |
| Starting time*4                                 |                            |   | 1-axis linear control   | 1.5 ms  |  |
|   |                            |   | 1-axis speed control  | 1.5 ms  |  |
|   |                            |   | 2-axis linear interpolation control (Composite speed)   | 1.5 ms  |  |
|   |                            |   | 2-axis linear interpolation control (Reference axis speed)  | 1.5 ms  |  |
|   |                            |   | 2-axis circular interpolation control   | 2.0 ms  |  |
|   |                            |   | 2-axis speed control  | 1.5 ms  |  |
|   |                            |   | 3-axis linear interpolation control (Composite speed)   | 1.7 ms  |  |
|   |                            |   | 3-axis linear interpolation control (Reference axis speed)  | 1.7 ms  |  |
|   |                            |   | 3-axis helical interpolation control  | 2.6 ms  |  |
|   |                            |   | 3-axis speed control  | 1.7 ms  |  |
|   |                            |   | 4-axis linear interpolation control   | 1.8 ms  |  |
|   |                            |   | 4-axis speed control  | 1.8 ms  |  |
| Maximum output pulse                            | LD75P□                     | 200 kpulse/s  |   |   |  |
|   | LD75D□                     | 4 Mpulse/s  |   |   |  |
| Maximum connection distance between drive units | LD75P□                     | 2 m   |   |   |  |
|   | LD75D□                     | 10 m  |   |   |  |
| Module size allocation                          |                            |   | 2   |   |  |
| Number of occupied I/O points                   |                            |   | 32 points (I/O assignment: Intelligent 32 points)   |   |  |
| External interface                              |                            |   | 40-pin connector  |   | 40-pin connector x2  |
| 5 V DC internal current consumption             | LD75P□                     | 0.44 A  | 0.48 A  | 0.55 A  |  |
|   | LD75D□                     | 0.51 A  | 0.62 A  | 0.76 A  |  |
| Weight  |                            |   | 0.18 kg   |   |  |

\*1: LD75P□ refers to the open collector output type, and LD75D□ refers to the differential driver output type.

\*2: The abbreviation for Point To Point, referring to position control.

\*3: In speed-position switching control (ABS mode), "degree" is the only control unit available.

\*4: Using the pre-reading start function, the actual starting time can be shortened.

## Flexible High-Speed I/O Control Module

I/O  
(DC/differential)

## LD40PD01


## Input specifications

Number of inputs: 12 points (all for 5 V DC/24 V DC/differential)  
Pulse input speed: Max. 8M pulse/s (2MHz)

## Output specifications

Number of outputs: 8 points for 5 V DC to 24 V DC, 6 points for differential  
Pulse output speed: Max. 8M pulse/s (2MHz)

Equipped with FPGA for high-speed I/O control



I/O response

1  $\mu$ s

Resolution


25 ns

Intuitive  
setting

## Fast and stable I/O response

High-speed response is realized with the hardware performance asynchronous to the CPU and control bus.


- LD40PD01 is equipped with an external I/O interface and FPGA\*1. This feature enables LD40PD01 to perform high-speed control, without being restricted by the CPU scan time and control bus performance. Dedicated configuration tool is also available to pre-check the product operation, further reducing the startup time.
- I/O response is stable as its processing speed only fluctuates in nanoseconds.

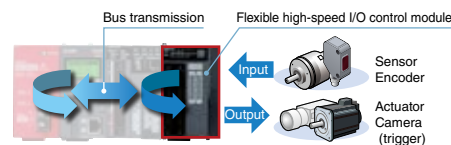

Flexible high-speed I/O control module




Existing programmable controller (LCPU embedded I/O + interrupts)

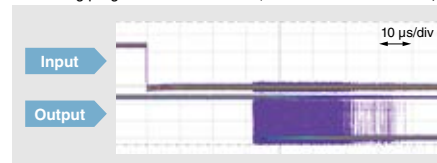

\*1: Abbreviation of Field Programmable Gate Array. FPGA is an LSI that can be programmed after the manufacture.

## Easy FPGA setup with dedicated configuration tool\*2

The design process associated with FPGA (HDL programming, logic synthesis, timing analysis) is no longer required, drastically reducing the development time. The configuration tool is also useful to pre-check the product operation, further reducing the startup time.

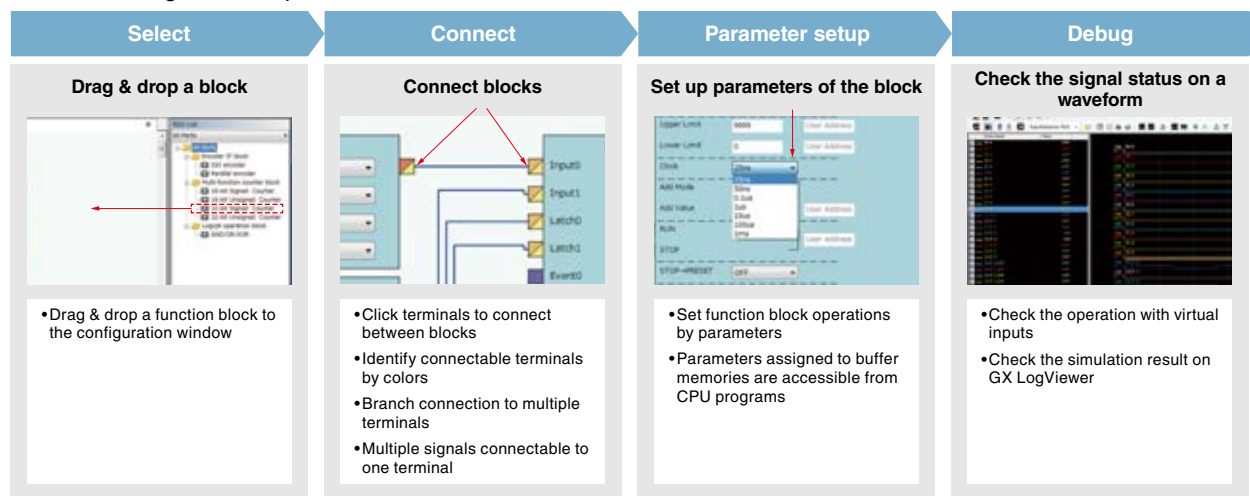

\*2: For further information on "Flexible High-Speed I/O Control Module Configuration Tool", please contact your local Mitsubishi sales representative.

## Supporting versatile applications

The flexible high-speed I/O control module realizes a wide range of controls including speed measurement, adjusted pulse output, ratio setting/distributed output, PWM control, and cam switch control.

### Pulse adjustment


- ON/OFF timings are finely adjusted down to 25 ns by using trigger inputs.
- Fluctuation of ON/OFF operation is minimized down to nanoseconds, enabling highly precise control.

### Speed measurement

- In addition to ON and OFF width, measurement in different conditions is possible, such as ON timing difference between sensors.
- The measurement increment of minimum 25 ns realizes highly accurate measurement.

### Delay output


- Output timing delays are adjusted for each point, minimizing output variations.

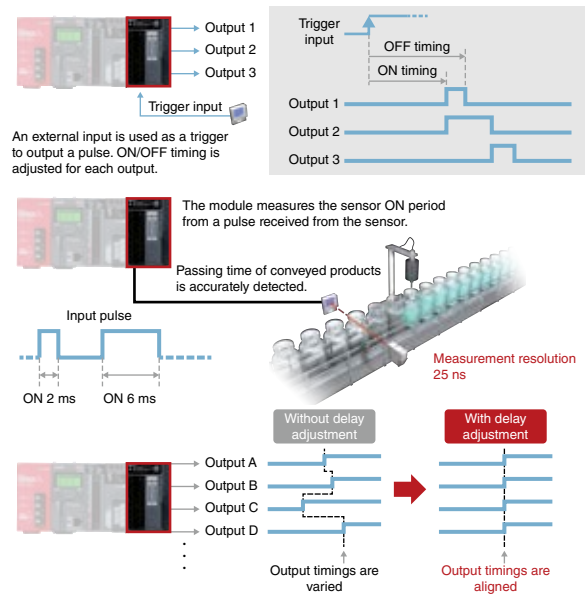

## Specifications

| Item   | LD40PD01  |   |
|--|---|---|
|  | DC  | Differential  |
| Number of input points   | 12 points (5/24 V DC/differential)  |   |
| Number of output points  | 8 points (5...24 V DC, 0.1 A/point)   | 6 points  |
| Number of interrupts   | 8 interrupts  |   |
| Input response time  | ≤ 1 μs (pulse input speed: Max. 200 kpulse/s)   | ≤ 1 μs (pulse input speed: Max. 8 Mpulse/s)   |
| Output response time   | ≤ 1 μs (pulse input speed: Max. 200 kpulse/s)   | ≤ 1 μs (pulse input speed: Max. 8 Mpulse/s)   |
| Main blocks (included in the configuration tool)                         |   |   |
| External input block   | Logic select  | Inverted, not inverted  |
|  | Filter time   | General input: 0 μs, 10 μs, 50 μs, 0.1 ms, 0.2 ms, 0.4 ms, 0.6 ms, 1 ms, 5 ms<br>Pulse input: 10 kpulse/s, 100 kpulse/s, 200 kpulse/s, 500 kpulse/s, 1 Mpulse/s, 2 Mpulse/s, 4 Mpulse/s, 8 Mpulse/s                             |
| Parallel encoder block   | Input data type   | Pure binary, gray code, BCD   |
|  | Data length   | 1 bit...12 bits   |
| SSI encoder block  | Input data type   | Pure binary, gray code  |
|  | Data length   | 1 bit...32 bits (Data length for single turn, multi-turn, and status can be set.)   |
| Multi function counter block   | Transmission speed  | 100 kHz, 200 kHz, 300 kHz, 400 kHz, 500 kHz, 1.0 MHz, 1.5 MHz, 2.0 MHz  |
|  | Counter timer block   | Type: Addition, subtraction, linear counter mode, ring counter mode, addition mode, preset counter function, latch counter function, internal clock function<br>Internal clock: 25 ns, 50 ns, 0.1 μs, 1 μs, 10 μs, 100 μs, 1 ms |
|  | Counting range  | 32-bit signed binary (-2147483648...2147483647), 32-bit unsigned binary (0...4294967295)<br>16-bit signed binary (-32768...32767), 16-bit unsigned binary (0...65535)   |
|  | Compare block   | Compare value: Same as the counting range<br>Compare mode: =, >, <, ≥, ≤, <>, within the range, outside the range   |
|  | Cam switch block  | number of steps: Up to 16 steps   |
|  | Set/reset block   | Uses the signal input to the Set terminal as a trigger to output the High fixed signal.<br>Uses the signal input to the Reset terminal as a trigger to output the Low fixed signal.   |
|  | Logical operation block   | Logical operation type: AND, OR, XOR  |
| External output block  | Logic select  | Inverted, not inverted  |
|  | Delay time  | None, 12.5 ns, 25 ns, 50 ns, 0.1 μs, 1 μs, 10 μs, 100 μs, 1 ms<br>Can be set up to 64 multiplies.   |
| Main functions that can be performed with the combination of main blocks | Pulse count, coincidence detection, cam switch, highly-accurate pulse output, PWM output, ratio setting, pulse measurement, electrical interface conversion |   |
| Processing time of the main hardware logic                               | Logic operation: Min. 87.5 ns, Coincidence output: Min. 137.5 ns, Cam switch: Min. 262.5 ns   |   |
| Module size allocation   | 2   |   |
| Number of occupied I/O points  | 32 points (I/O assignment: Intelligent 32 points)   |   |
| External interface   | 40-pin connector x2   |   |
| 5 V DC internal current  | 0.66 A  |   |
| Weight   | 0.18 kg   |   |

## High-Speed Counter Modules

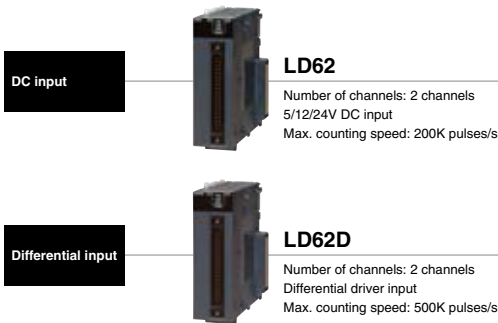

| Function                        | LD62<br>DC input | LD62D<br>Differential input |
|---------------------------------|------------------|-----------------------------|
| Linear counter function         | ●                | ●                           |
| Ring counter function           | ●                | ●                           |
| Coincidence output function     | ●                | ●                           |
| Preset function                 | ●                | ●                           |
| Disable count function          | ●                | ●                           |
| Latch counter function          | ●                | ●                           |
| Sampling counter function       | ●                | ●                           |
| Periodic pulse counter function | ●                | ●                           |

### Specifications


| Item                                |   | LD62 [DC input]   | LD62D [Differential input]  |
|-------------------------------------|---|---|---|
| Number of channels                  |   | 2 channels  |   |
| Counting speed switch setting       |   | 10K pulses/s, 100K pulses/s, 200K pulses/s  | 10K pulses/s, 100K pulses/s, 200K pulses/s, 500K pulses/s   |
| Count input signal                  | Phase   | 1-phase input (multiple of 1/2), CW/CCW, 2-phase input (multiple of 1/2/4)                                      |   |
|                                     | Signal level (A, B)                           | 5/12/24 V DC 2...5 mA   | EIA Standard RS-422-A differential type line driver level<br>(Equivalent with AM26LS31 (manufactured by Texas Instruments Japan Limited)) |
| Counter                             | Maximum counting speed*1                      | 200K pulses/s   | 500K pulses/s   |
|                                     | Counting range                                | -2147483648...2147483647  |   |
|                                     | Type  | UP/DOWN preset counter and ring counter functions   |   |
|                                     | Minimum count pulse width<br>(Duty ratio 50%) | 10K pulses/s  | 50 μs   |
|                                     |   | 100K pulses/s   | 5 μs  |
|                                     |   | 200K pulses/s   | 2.5 μs  |
| Coincidence output                  | Comparison range                              | 10K pulses/s  | 25 μs   |
|                                     |   | 100K pulses/s   | 2.5 μs  |
|                                     |   | 200K pulses/s   | 1.25 μs   |
|                                     | Comparison result                             | 10K pulses/s  | 0.5 μs  |
| External input                      | Preset  | 5/12/24 V DC 2...5 mA   |   |
|                                     | Function start                                | 5/12/24 V DC 2...5 mA (Differential type line drivers conforming to EIA standard RS-422-A are also applicable.) |   |
|                                     | Minimum input response time                   | OFF to ON   | Function start: 0.5 ms  |
| External output                     | Coincidence output                            | ON to OFF   | Function start: 1 ms  |
|                                     | Output voltage/current                        | 2 points/channel  |   |
|                                     | Output response time                          | 12...24 V DC 0.5 A  | ≤ 0.1 ms (rated load, resistive load)   |
| Module size allocation              |   | 1   |   |
| Number of occupied I/O points       |   | 16 points (I/O assignment: Intelligent 16 points)   |   |
| External interface                  |   | 40-pin connector  |   |
| 5 V DC internal current consumption |   | 0.31 A  | 0.36 A  |
| Weight                              |   | 0.13 kg   |   |

\*1: The counting speed is affected by the rising/falling pulse speed. For details, refer to the corresponding manual.

## Seamless integration of multiple networks

The MELSEC L Series is part of a family of products all interconnected across various levels of automation. Based on the seamless message protocol (SLMP\*), data flows transparently between the sensor level and the management level across multiple industry-standard automation networks.

CC-Link IE, Asia's No. 1 industrial network, realizes fast gigabit data transmission speeds, further optimizing the manufacturing cycle. In addition, digital link sensor AnyWireASLINK further enhance the factory-wide connectivity solution.

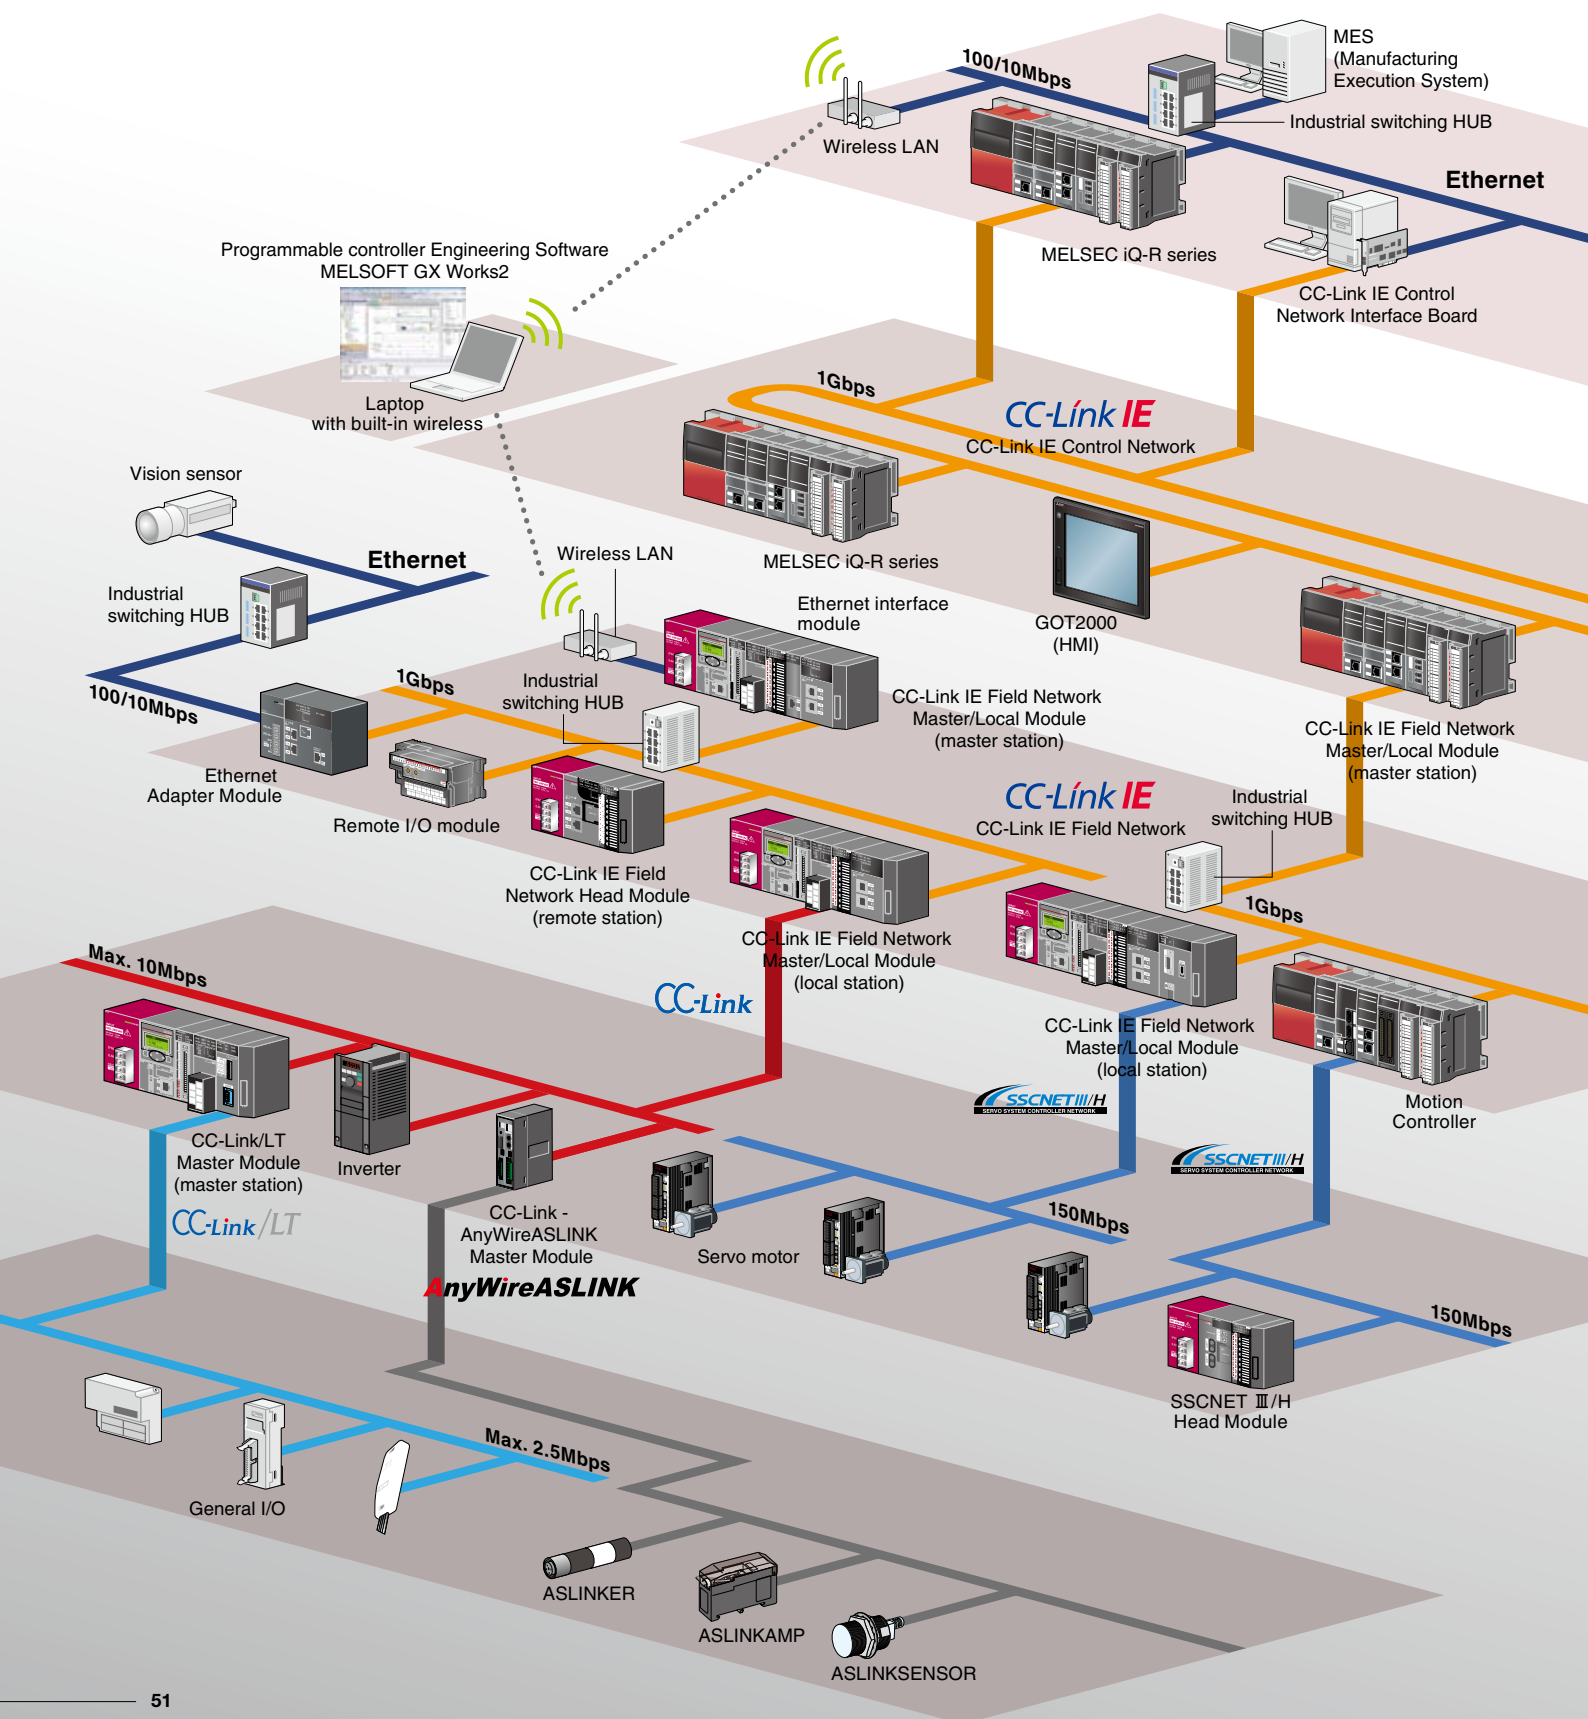




## Seamless communication

Seamless data communication through Ethernet, CC-Link IE Control, CC-Link IE Field, and CC-Link networks allow easy access to information, no matter where it resides on the network. Through this technology, it is possible to “drill down” from the Enterprise or IT layer through multiple networks accessing programming controllers using GX Works2 programming or other related software.

In addition, many devices supporting SLMP\*1 such as vision sensors and RFID controllers may be connected to the CC-Link IE Field Network.

\*1: SLMP (SeamLess Message Protocol) is a protocol advocated by the CC-Link Partner Association.

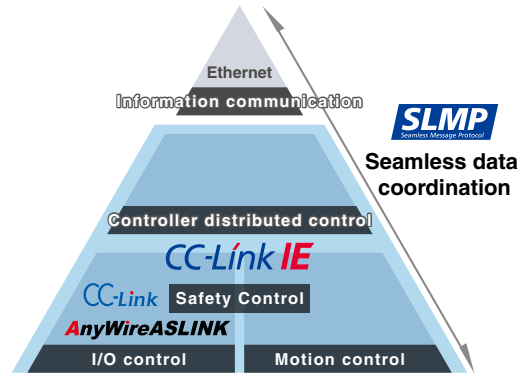

### CC-Link IE Control

CC-Link IE Control is a high-reliability distributed control network designed to handle very large data communications (128K word) over a high-speed (1 Gbps) dual-loop optical cable topology.

\*: L Series does not support the CC-Link IE Control Network.

### CC-Link IE Field

CC-Link IE Field is a versatile gigabit Ethernet-based network integrating controller, I/O control, safety control, and motion control in a flexible wiring topology supporting star, ring, and line configurations.

\*: Compatible modules: LJ71GF11-T2, LJ72GF15-T2

### CC-Link

CC-Link is a high-speed and high-reliable deterministic I/O control network which realizes reduced wiring whilst offering multi-vendor compatible products. This open field network is a global standard originating from Japan and Asia.

\*: Compatible modules: L26CPU-BT, L26CPU-PBT, LJ61BT11

### CC-Link/LT

CC-Link/LT is a wire-saving sensor level network which is designed for use in panels between simple discrete devices. Its wiring system is based on reducing incorrect wiring and is based on CC-Link realizing high-speed and robust noise resistance features.

\*: Compatible module: LJ61CL12

### AnyWireASLINK

AnyWireASLINK makes it possible to centrally monitor (visibility) the state of all sensors from the programmable controller, by that improving productivity and reducing operation steps.

\*: Modules supporting AnyWireASLINK: LJ51AW12AL

### SSCNET III/H

SSCNET III/H is a dedicated high-speed, high-performance, and highly reliable servo system control network that offers flexible long distance wiring capabilities based on optical fiber cable topology.

\*: Compatible modules: LD77MS2, LD77MS4, LD77MS16, LJ72MS15

### BACnet™

This network supports the communication protocol standard BACnet™ client function. This network is mainly used to monitor and control air-conditioning, lighting and fire detection, etc. in building automation system applications.

\*: Compatible modules: L02CPU(-P), L06CPU(-P), L26CPU(-P), L26CPU(-P)BT, LJ71E71-100 (client only)

### MODBUS®

L-Series is now supporting the MODBUS® protocol network, realizing easy communication, with various MODBUS® slave devices compatible with Ethernet MODBUS®/TCP or RS-232C/422/485 serial communication.

\*: Module supporting MODBUS®/TCP: L02CPU(-P), L06CPU(-P), L26CPU(-P), L26CPU(-P)BT, LJ71E71-100 (master only)

\*: Modules supporting MODBUS®: L6ADP(-R2/R4), LJ71C24(-R2) (master only)

| Network            | Application | Enterprise level network  |  | Control level network          |  | Device level network |                |                | Sensor level network |
|--------------------|-------------|---------------------------|--|--------------------------------|--|----------------------|----------------|----------------|----------------------|
|                    |             | Information communication |  | Controller distributed control |  | I/O control          | Safety control | Motion control | Control              |
| Ethernet           |             | ●                         |  |                                |  |                      |                |                |                      |
| CC-Link IE Control |             |                           |  | ●                              |  |                      |                |                |                      |
| CC-Link IE Field   |             |                           |  | ●                              |  | ●                    | ●              | ●              |                      |
| CC-Link            |             |                           |  |                                |  | ●                    |                |                |                      |
| CC-Link/LT         |             |                           |  |                                |  |                      |                |                | ●                    |
| AnyWireASLINK      |             |                           |  |                                |  |                      |                |                | ●                    |
| SSCNET III/H       |             |                           |  |                                |  |                      |                | ●              |                      |
| BACnet™            |             | ●                         |  |                                |  |                      |                |                |                      |
| MODBUS®/TCP        |             |                           |  | ●                              |  |                      |                |                |                      |
| MODBUS®            |             |                           |  |                                |  | ●                    |                |                |                      |

## CC-Link IE Field Network Master/Local Module

CC-Link IE Field




### LJ71GF11-T2

CC-Link IE Field Master/local station  
 Communication speed: 1 Gbps  
 Remote I/O: 16384 points  
 Remote register: 8192 words  
 \*: Supported by CPUs whose first five serial number digits are "13012" or later.

### Easy to configure settings

Network parameters are configured using the engineering tool, GX Works2. Only the master station needs to be configured, thereby greatly simplifying the network setup. Updating the system configuration is a breeze.

Master station settings are all that is required!

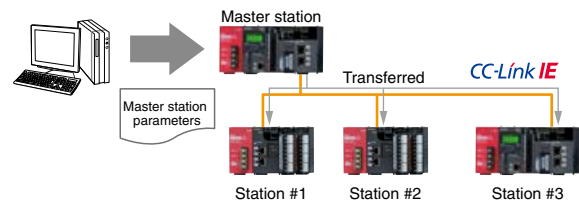


### Flexible network topology

Various network topologies are supported including star, line, star and line combination, and ring. When hubs\*<sup>1</sup> are used, new equipment can be added and machine layouts can be changed easily.

\*1: Hubs cannot be used in a ring configuration.

#### Examples of network topologies

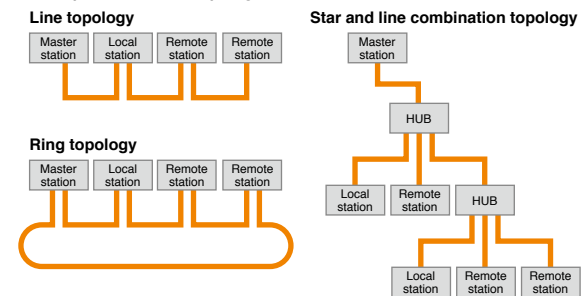

### Specifications

| Item  |                       | LJ71GF11-T2   |   |
|---|-----------------------|---|---|
| Transmission speed  |                       | 1 Gbps  |   |
| Maximum overall cable distance<br>(Maximum transmission distance) | Line topology         | 12000 m (when cables are connected to 1 master station and 120 slave stations)                                |   |
|   | Star topology         | Depends on the system configuration   |   |
|   | Ring topology         | 12100 m (when cables are connected to 1 master station and 120 slave stations)                                |   |
| Maximum number of connected stations                              | Master station        | 1 station (Up to 120 slave stations can be connected to the master station)                                   |   |
|   | Local station         | 120 stations  |   |
| Maximum link points per station                                   | Remote register (RWw) | 8192 points, 16 KB  |   |
|   | Remote register (RWr) | 8192 points, 16 KB  |   |
|   | Remote input (RX)     | 16384 points, 2 KB  |   |
|   | Remote output (RY)    | 16384 points, 2 KB  |   |
| Maximum link points per station                                   | Master station        | Remote register (RWw)   | 8192 points, 16 KB  |
|   |                       | Remote register (RWr)   | 8192 points, 16 KB  |
|   |                       | Remote input (RX)   | 16384 points, 2 KB  |
|   |                       | Remote output (RY)  | 16384 points, 2 KB  |
|   | Local station         | Remote register (RWw)   | 8192 points, 16 KB (also including the send range of own station) |
|   |                       | Remote register (RWr)   | 8192 points, 16 KB  |
|   |                       | Remote input (RX)   | 16384 points, 2 KB  |
|   |                       | Remote output (RY)  | 16384 points, 2 KB (also including the send range of own station) |
| Network topology  |                       | Line topology, star topology (Coexistence of line topology and star topology is possible.), and ring topology |   |
| Communication method  |                       | Token passing method  |   |
| Communication port  |                       | CC-Link IE Field Network port x 2   |   |
| RAS function  |                       | Automatic return, Slave station disconnection, Loopback function  |   |
| Connection cable*2  |                       | Ethernet cable (Category 5e or higher, double shielded/STP)   |   |
| Module size allocation  |                       | 2   |   |
| Number of occupied I/O points                                     |                       | 32 points (I/O assignment: Intelligent 32 points)   |   |
| 5 V DC internal current consumption                               |                       | 0.89 A  |   |
| Weight  |                       | 0.27 kg   |   |

\*2: Standard (straight type) cable


## CC-Link IE Field Network Head Module



CC-Link IE

## CC-Link IE Field Network remote station

L Series I/O and intelligent function modules can be connected to the head module without a dedicated CPU. There are many benefits to using intelligent device stations including reduced CPU and wiring costs, great flexibility in selecting I/O and intelligent function modules, and compact unit size.

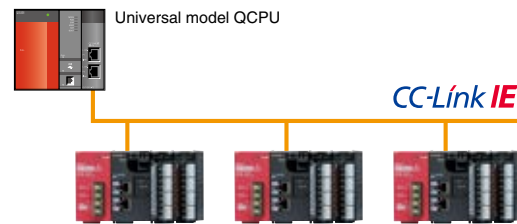


Modules compatible with the CC-Link IE Field Network head module

| Item                       |  |
|----------------------------|--|
| I/O module                 | Input, output, I/O combined                              |
| Multiple input module      | Multiple input (voltage/current/temperature)             |
| Analog module              | Analog input, analog output, analog input/output         |
| Temperature input module   | RTD input  |
| Temperature control module |  |
| Simple motion module       |  |
| Positioning module         |  |
| High-speed counter module  |  |
| Network module             | CC-Link, CC-Link/LT, AnyWireASLINK, serial communication |

## RAS (Reliability, Availability, Serviceability) functions

One feature of RAS is to store all remote station error histories in the master station's latched memory. This preserves the error information in one place in the event of power loss and allows for easy troubleshooting. Other RAS features include network event logging, unit error logging, and testing and monitoring capabilities.

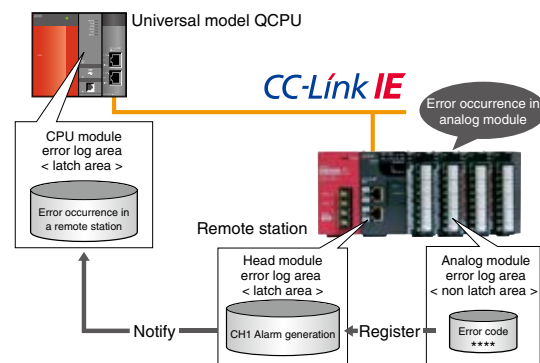

## Specifications

| Item  |                       | LJ72GF15-T2   |
|---|-----------------------|---|
| Transmission speed  |                       | 1 Gbps  |
| Maximum overall cable distance<br>(Maximum transmission distance) | Line network topology | 12000 m (with 1 master and 120 slaves connected)  |
|   | Star network topology | Depends on the system configuration   |
|   | Ring network topology | 12100 m (with 1 master and 120 slaves connected)  |
| Transmission path   |                       | Line, star, line and star mixed, or ring topology   |
| Communication method  |                       | Deterministic (token passing)   |
| Maximum number of installable modules*1                           |                       | 10  |
| Communication port  |                       | CC-Link IE Field Network port x 2   |
| RAS function  |                       | Network event logging, unit error logging, testing, monitoring, and error history preservation function |
| Connection cable*2  |                       | Ethernet cable (Category 5e or higher, double shielded/STP)   |
| 5 V DC internal current consumption                               |                       | 1.00 A  |
| Weight  |                       | 0.23 kg   |

\*1: The total number of modules that can be installed onto a CC-Link IE Field Network head module. (END cover and power supply module are not included.) Note that only one head module per system is possible.

\*2: Standard (straight type) cable.


## CC-Link Master/Local Module



### Connect with a huge selection of device types using CC-Link

With such a large selection of CC-Link open network compatible devices, constructing a control system is easy.

Even applications requiring vast amounts of data transmissions can be satisfied because CC-Link Ver.2.0 is supported.

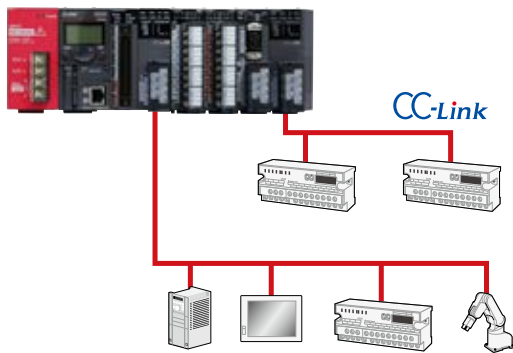


### Local stations do not require transmission speed settings

#### Transmission speed auto-tracking function

When used as a local station, no transmission speed setting is required; the setting is made through automatic detection of the master station setting.

The current transmission speed is indicated by an LED on the front surface of the module.

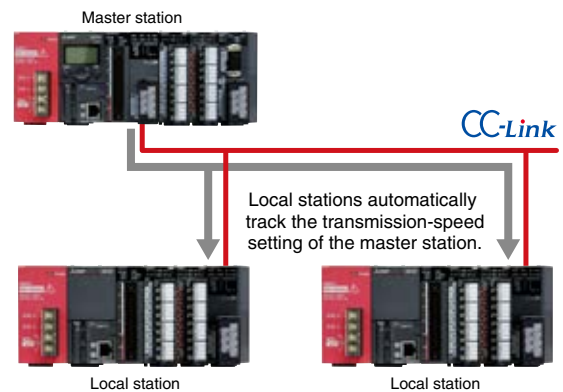

### Specifications

| Item  | LJ61BT11  |
|---|---|
| Transmission speed  | 156 kbps/625 kbps/2.5 Mbps/5 Mbps/10 Mbps   |
| Maximum overall cable distance<br>(Maximum transmission distance) | 1200 m (without repeater, varies according to the transmission speed)   |
| Maximum number of connected stations (master station)             | 64  |
| Number of occupied stations (local station)                       | 1...4 stations (The number of stations can be switched using the GX Works2 parameter setting)                       |
| Maximum number of link points per system*2                        | Remote I/O (RX, RY)   |
|   | 2048 points   |
|   | Remote register (RWw)   |
|   | 256 points (master station → remote device station/local station/intelligent device station/standby master station) |
| Number of link points per station*2                               | Remote register (RWr)   |
|   | 256 points (remote device station/local station/intelligent device station/standby master station → master station) |
|   | Remote I/O (RX, RY)   |
|   | 32 points (local station is 30 points)  |
| Communication method  | Remote register (RWw)   |
|   | 4 points (master station → remote device station/local station/intelligent device station/standby master station)   |
|   | Remote register (RWr)   |
|   | 4 points (remote device station/local station/intelligent device station/standby master station → master station)   |
| Communication method  | Broadcast polling method  |
| Synchronous method  | Frame synchronization method  |
| Encoding method   | NRZI method   |
| Transmission path   | Bus (RS-485)  |
| Transmission format   | Conforms to HDLC  |
| Error control system  | CRC (X <sup>16</sup> +X <sup>12</sup> +X <sup>6</sup> +1)   |
| RAS function  | Automatic return function   |
|   | Slave station cut-off function  |
|   | Error detection via link special relay/register   |
| Connection cable  | CC-Link dedicated cables compatible with Ver.1.10   |
| Module size allocation  | 1   |
| Number of occupied I/O points                                     | 32 points (I/O assignment: Intelligent 32 points)   |
| 5 V DC internal current consumption                               | 0.46 A  |
| Weight  | 0.15 kg   |

\*2: Indicates the number of link points for Remote net Ver.1 mode.

## CC-Link/LT Master Module

CC-Link/LT



### LJ61CL12


CC-Link/LT master station  
Max. communication speed: 2.5 Mbps  
Remote I/O: 1024 points\*1  
\*1: When in 16-point mode

CC-Link/LT

## High speed equipment response

CC-Link/LT has an excellent response time. With 64 stations and a transmission speed of 2.5 Mbps, the maximum link scan time is just 1.2 ms. According to the transmission distance required, it is possible to select speeds of 2.5 Mbps, 625 kbps, or 156 kbps.

■ CC-Link/LT link scan time (using a transmission speed of 2.5 Mbps)

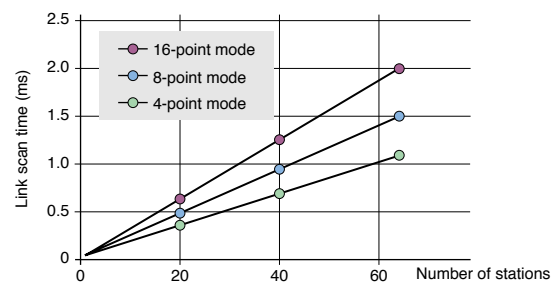

## Simple networking that 'just works'

There are no confusing parameters settings to make, and with remote I/O, only the master station needs to set the transmission speed.

### Specifications

| Item                                |  |                          |   | LJ61CL12   |  |                             |  |                              |  |
|-------------------------------------|--|--------------------------|---|--|--|-----------------------------|--|------------------------------|--|
| Point mode                          |  |                          |   | 4-point mode   |  | 8-point mode                |  | 16-point mode                |  |
| Control specifications              | Maximum link points<br>(the same I/O address used)     |                          |   | 256 points<br>(512 points)   |  | 512 points<br>(1024 points) |  | 1024 points<br>(2048 points) |  |
|                                     | Link points per station<br>(the same I/O address used) |                          |   | 4 points<br>(8 points)   |  | 8 points<br>(16 points)     |  | 16 points<br>(32 points)     |  |
|                                     | Link scan<br>time                                      | 32 stations<br>connected | Points  | 128 points   |  | 256 points                  |  | 512 points                   |  |
|                                     |  |                          | 2.5 Mbps  | 0.7 ms   |  | 0.8 ms                      |  | 1.0 ms                       |  |
|                                     |  |                          | 625 kbps  | 2.2 ms   |  | 2.7 ms                      |  | 3.8 ms                       |  |
|                                     |  |                          | 156 kbps  | 8.0 ms   |  | 10.0 ms                     |  | 14.1 ms                      |  |
|                                     |  | 64 stations<br>connected | Points  | 256 points   |  | 512 points                  |  | 1024 points                  |  |
|                                     |  |                          | 2.5 Mbps  | 1.2 ms   |  | 1.5 ms                      |  | 2.0 ms                       |  |
|                                     |  |                          | 625 kbps  | 4.3 ms   |  | 5.4 ms                      |  | 7.4 ms                       |  |
|                                     |  |                          | 156 kbps  | 15.6 ms  |  | 20.0 ms                     |  | 27.8 ms                      |  |
| Communication specifications        | Transmission speed                                     |                          |   | 2.5 Mbps/625 kbps/156 kbps   |  |                             |  |                              |  |
|                                     | Communication method                                   |                          |   | BITR method (Broadcast polling + Interval Timed Response)  |  |                             |  |                              |  |
|                                     | Network topology                                       |                          |   | T-branch type  |  |                             |  |                              |  |
|                                     | Error control system                                   |                          |   | CRC  |  |                             |  |                              |  |
|                                     | Number of connectable modules                          |                          |   | 64   |  |                             |  |                              |  |
|                                     | Remote station number                                  |                          |   | 1...64   |  |                             |  |                              |  |
|                                     | Installation position of master station                |                          |   | End of a trunk line  |  |                             |  |                              |  |
|                                     | RAS function   |                          |   | Network diagnostics, internal loopback diagnostics, slave station cutoff function, automatic return function |  |                             |  |                              |  |
| Connection cable*2                  |  |                          | Dedicated flat cable (0.75 mm <sup>2</sup> × 4)*3, VCTF cable*4, flexible cable*3 |  |  |                             |  |                              |  |
| Module size allocation              |  |                          |   | 1  |  |                             |  |                              |  |
| Number of occupied I/O points*5     |  |                          |   | 16, 32, 48, 64, 128, 256, 512, or 1024 points (I/O assignment: Intelli.)                                     |  |                             |  |                              |  |
| 5 V DC internal current consumption |  |                          |   | 0.16 A   |  |                             |  |                              |  |
| 24 V DC power supply*6              | Voltage  |                          |   | 20.4...28.8 V DC   |  |                             |  |                              |  |
|                                     | Current consumption                                    |                          |   | 0.03 A   |  |                             |  |                              |  |
|                                     | Current on startup                                     |                          |   | 0.07 A   |  |                             |  |                              |  |
| Weight                              |  |                          |   | 0.12 kg  |  |                             |  |                              |  |

\*2: When the cables other than dedicated flat cables, VCTF cables, and flexible cables are used, performance of CC-Link/LT is not guaranteed.

\*3: Use the dedicated flat cables and flexible cables accredited by CC-Link Partner Association. CC-Link Partner Association website: <http://www.cc-link.org>

\*4: Refer to the manual for details regarding VCTF cable specifications.

\*5: Set the number of occupied I/O points using the operation setting switch. Refer to the manual for details.

\*6: 24 V DC power supply is supplied through the dedicated power supply or power supply adapter.

## AnyWireASLINK Master Module

AnyWireASLINK

**LJ51AW12AL DB**

AnyWireASLINK master station  
 Transmission distance: Max. 200 m  
 Data I/O: Max. 512 points\*<sup>1</sup>  
 Number of connected stations: Max. 128 modules  
 \*1: 256 input points/256 output points

**AnyWireASLINK**

### Linking the sensor I/O with the programmable controller

The AnyWireASLINK master module links the sensor inputs and outputs to the programmable controller.

The module enables flexible layout of miniature sensors with 512 I/O points.

The sensor power can be supplied to the AnyWireASLINK transmission line (2-wire) for communication, allowing sensors to be added easily.

With the MELSEC-L Series, faulty sensors can be detected and the slave module settings can be managed at once by GX Works2 engineering environment, further reducing the engineering time.

#### Basic configuration

Either the 2-wire type or 4-wire slave device can be selected according to the load current for AnyWireASLINK. In addition to the 2-wire type, a 4-wire type can also be used by supplying the local power.


#### 2-wire type

If the load current is low, 2-wire type (non-insulated) slave devices can be used without an external power supply.


#### 4-wire type

The 4-wire type (insulated) slave devices require an external 24 V DC power supply to satisfy large load current applications, for example.

#### Configuration with 2-wire type (with no local power feed)

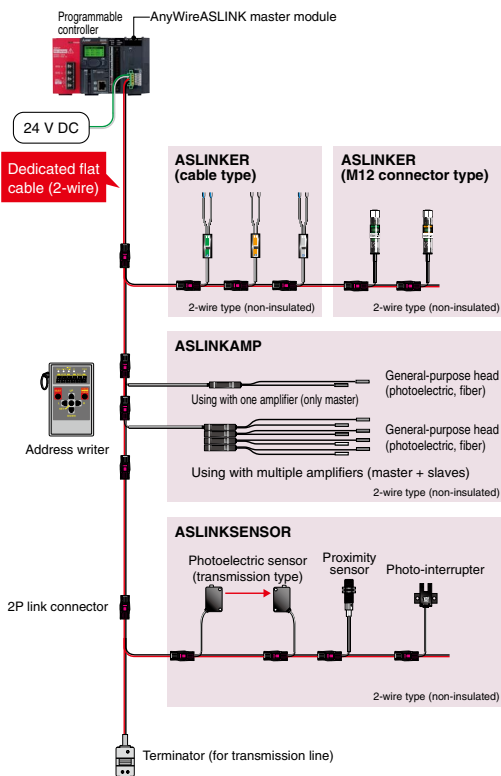

#### Configuration with 2-wire/4-wire type (with local power feed)

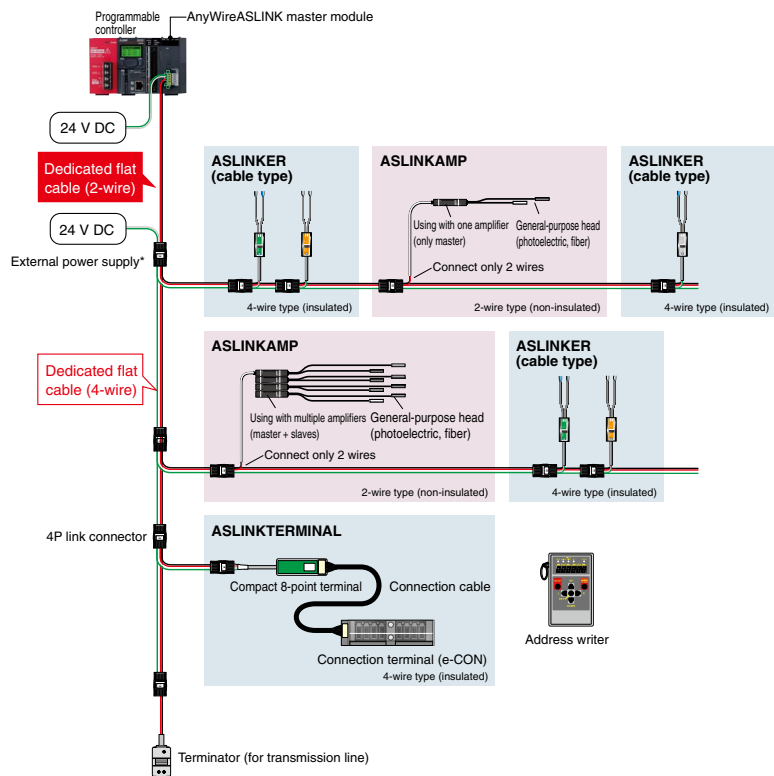

\* External power for 4-wire type wiring.




## Preventing intermittent operation stops

AnyWireASLINK can be used to monitor and save the sensor information within the programmable controller. Parameter settings of the AnyWireASLINK can also be changed via the programmable controller. Perform “preventive maintenance” with this function to prevent intermittent stops before they happen.

### Prevent intermittent stops with preventive maintenance!


- Analyze the amount of incoming light.
- Sensitivity threshold can be adjusted to keep operation up to the maintenance cycle.

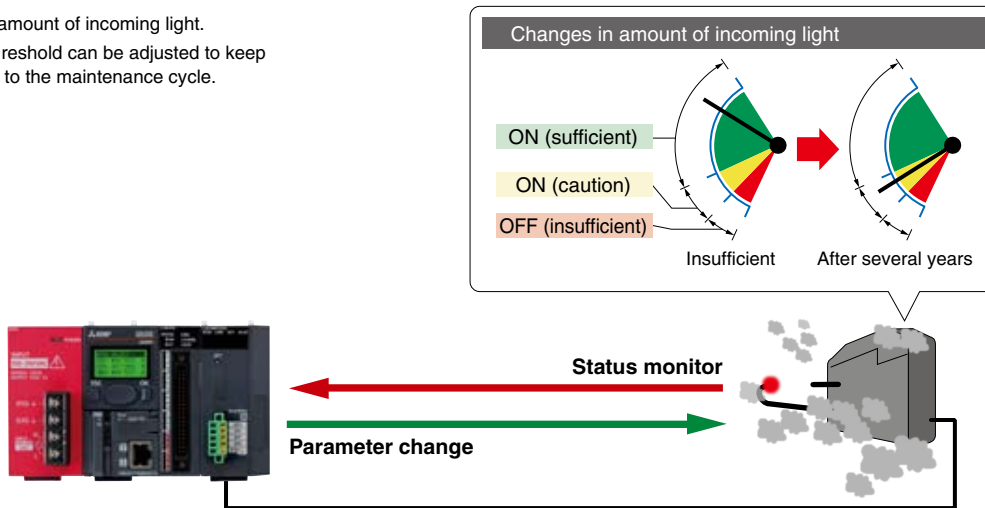

## Reducing the setup time, and providing the traceability

AnyWireASLINK enables the set value to be registered at once to multiple sensors via a GOT (HMI) or personal computer. Also, the initial set values can be re-confirmed easily without having to read each sensor individually.

- Register set values to multiple sensors, and automatically read the initial set values.

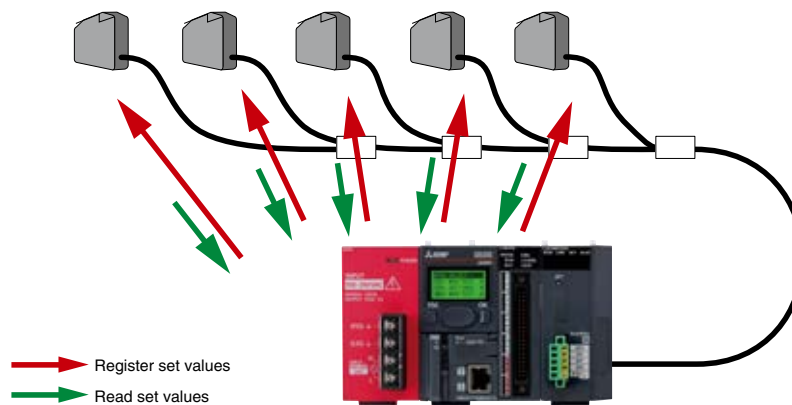

## ■ Specifications

| Item  | LJ51AW12AL DB  |
|---|--|
| Transmission clock                              | 27.0 kHz   |
| Maximum transmission distance (overall length)  | 200 m <sup>*1</sup>  |
| Transmission method                             | DC power superimposed total frame cyclic method  |
| Connection style                                | Bus type (multi-drop method, T-branch method, tree branch method)  |
| Transmission protocol                           | Dedicated protocol (AnyWireASLINK)   |
| Error control                                   | Checksum, double verification method   |
| Number of connected I/O points                  | Max. 512 points (256 input points/256 output points)   |
| Number of connected modules                     | Max. 128 modules (varies according to each slave module's current consumption)   |
| RAS function                                    | Transmission cable break position detection function,<br>transmission cable short-circuit detection function,<br>transmission power drop detection function  |
| Transmission cable (DP, DN)                     | <ul style="list-style-type: none"> <li>• UL compatible universal 2-wire cable (VCTF, VCT 1.25 mm<sup>2</sup>, 0.75 mm<sup>2</sup>, rated temperature 70°C or more)</li> <li>• UL compatible universal cable (1.25 mm<sup>2</sup>, 0.75 mm<sup>2</sup>, rated temperature 70°C or more)</li> <li>• Dedicated flat cable (1.25 mm<sup>2</sup>, 0.75 mm<sup>2</sup>, rated temperature 90°C)</li> </ul> |
| Power cable (24 V, 0 V)                         | <ul style="list-style-type: none"> <li>• UL compatible universal 2-wire cable (VCTF, VCT 0.75 mm<sup>2</sup>...2.0 mm<sup>2</sup>, rated temperature 70°C or more)</li> <li>• UL compatible universal cable (0.75 mm<sup>2</sup>...2.0 mm<sup>2</sup>, rated temperature 70°C or more)</li> <li>• Dedicated flat cable (1.25 mm<sup>2</sup>, 0.75 mm<sup>2</sup>, rated temperature 90°C)</li> </ul> |
| Transmission cable supply current <sup>*2</sup> | Using 1.25 mm <sup>2</sup> cable: Max. 2 A<br>Using 0.75 mm <sup>2</sup> cable: Max. 1 A   |
| Module size allocation                          | 1  |
| Number of occupied I/O points                   | 32 points (I/O assignment: 32 intelligent points)  |
| External power supply                           | Voltage: 21.6...27.6 V DC (24 V DC -10...+15%), ripple voltage 0.5 Vp-p or less<br>Recommended voltage: 26.4 V DC (24 V DC +10%)<br>Module current consumption: 0.1 A<br>Transmission cable current supply: Max. 2 A <sup>*1</sup>   |
| 5 V DC internal current consumption             | Max. 0.2 A   |
| Weight  | 0.2 kg   |

\*1: With the slave module having an integrated transmission cable (DP, DN) and module, the length of the transmission cable (DP, DN) is included in the overall length.

\*2: Refer to the manual for the relation of the overall length, transmission cable (DP, DN) wire diameter and transmission cable current supply. In some slave modules with cables, the wire diameter of the transmission cable (DP, DN) integrated with the module may be 0.75 mm<sup>2</sup> or less.

## SSCNET III/H Head Module




## SSCNET III/H remote station

The SSCNET III/H head module is used to connect the MELSEC-L Series I/O and intelligent function modules to the SSCNET III/H network.

Functioning as the motion controller's remote station, flexible system configuration can be achieved while realizing reduced system wiring and a smaller footprint.

In addition, modules installed on the SSCNET III/H head module can be used as a motion controller input/output using cyclic transmission.

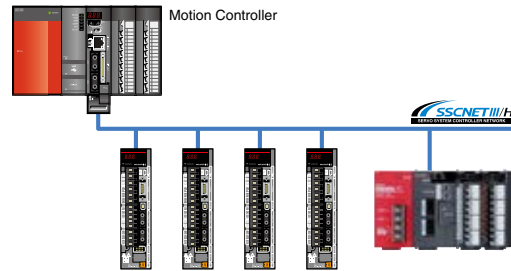

### SSCNET III/H head module compatible modules

| Product                    |  |
|----------------------------|--|
| I/O module                 | Input, output, I/O combined                      |
| Multiple input module      | Multiple input (voltage/current/temperature)     |
| Analog module              | Analog input, analog output, analog I/O combined |
| Temperature input module   | RTD input  |
| High-speed counter modules |  |

### Compatible motion controller

| Category                     | Model                  |
|------------------------------|------------------------|
| Motion CPU                   | Q172DSCPU<br>Q173DSCPU |
| Standalone motion controller | Q170MSCPU              |


## Specifications

| Item                                       |                                  | LJ72MS15  |
|--|----------------------------------|---|
| Maximum link points per network            | RWr, RX                          | 256 bytes   |
|  | RWw, RY                          | 256 bytes   |
| Maximum link points per station            | RWr, RX                          | 64 bytes  |
|  | RWw, RY                          | 64 bytes  |
| Communication speed                        |                                  | 150 Mbps  |
| Maximum connectable stations per network*1 | Communication cycle: 888 $\mu$ s | 4   |
|  | Communication cycle: 444 $\mu$ s | 2   |
|  | Communication cycle: 222 $\mu$ s | 1   |
| Maximum station-to-station distance        |                                  | POF type: 20 m, H-PCF type: 50 m  |
| Connection method                          |                                  | Daisy chain connection (Regenerative relay system with a servo amplifier)   |
| Synchronous method                         |                                  | Synchronization of the control cycle and communication cycle that synchronize with the data transmission of the motion controller |
| Communication cycle                        |                                  | 222 $\mu$ s/444 $\mu$ s/888 $\mu$ s   |
| Maximum number of installable modules*2    |                                  | 10  |
| Communication port                         |                                  | SSCNET III/H port x2  |
| Connection cable                           |                                  | SSCNET III cable (optical fiber cable)  |
| 5 V DC internal current consumption        |                                  | 0.55 A  |
| Weight                                     |                                  | 0.20 kg   |

\*1: This number includes only head modules. Servo amplifiers are not included.

\*2: Total number of modules that can be installed onto a SSCNET III/H head module. (Does not include the END cover or power supply module.) Note that only one head module per system is possible.

## Ethernet Interface Module

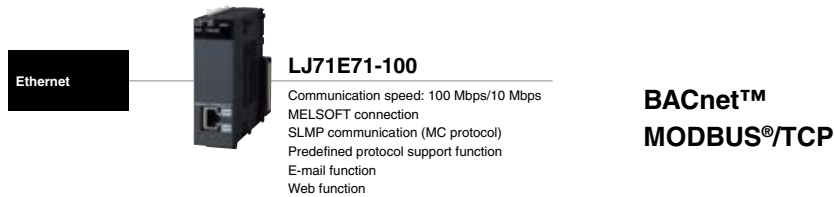


### Modify/collect CPU data from other devices

#### SLMP (MC protocol) communication\*1

SLMP (Seamless Message Protocol) realizes seamless communication across devices on Ethernet that support the SLMP protocol.

\*1: This function can be used with modules with first five serial number digits are "15042" or later.

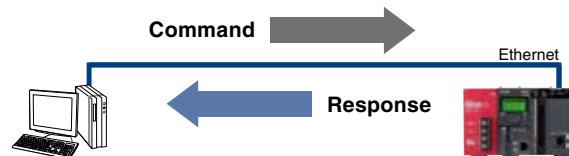

#### MELSOFT connection


The MELSOFT connection feature realizes the connection to various MELSOFT products including the GX Works2 programming tool. In addition, by using together with the MX Component communication support tool (optional product), custom communications programs can be created, without having to consider any dedicated protocol (send/receive procedure).

### Easily connect to BACnet™ and MODBUS®/TCP

#### Predefined Protocol support function

Use the GX Works2 Predefined Protocol support function to easily set the required protocol for communicating with other devices.

- ▶ Selecting from the communication protocol library  
Easily communicate with target devices by selecting a prepared protocol. The communication protocol library supports the SLMP, MODBUS®/TCP and BACnet™ client functions.

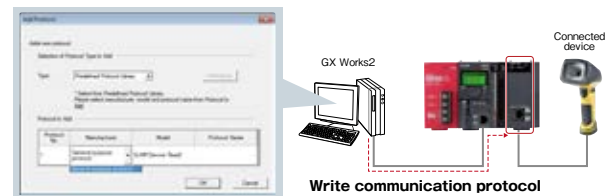

- ▶ Randomly preparing and editing a protocol

By creating a random protocol with the predefined protocol support function, data can be exchanged with a protocol that matches the target device.

### Specifications

| Item                                  |   | LJ71E71-100                                       |  |
|---------------------------------------|---|---|--|
| Standard                              | Standard                                | 100 BASE-TX                                       | 10 BASE-T                                  |
|                                       | Data transmission speed                 | 100 Mbps  | 10 Mbps                                    |
|                                       | Interface                               | RJ45 (AUTO MDI/MDI-X)                             |  |
|                                       | Communication mode                      | Full duplex/Half duplex                           | Half duplex                                |
|                                       | Transmission method                     | Base band   |  |
| Transmission specifications           | Maximum segment length                  | 100 m (length between a hub and node)*2           |  |
|                                       | Maximum number of cascade connections   | Cascade connection (maximum of 2 levels)*3        | Cascade connection (maximum of 4 levels)*3 |
|                                       | Number of simultaneous open connections | 16 connections (Connections usable on a program)  |  |
|                                       | Fixed buffer                            | 1K word × 16                                      |  |
| Sending/receiving data storage memory | Random access buffer                    | 6K words × 1                                      |  |
|                                       | E-mail                                  | Attachment  | 6K words × 1                               |
|                                       |   | Main text   | 960 words × 1                              |
|                                       | Module size allocation                  | 1   |  |
| Number of occupied I/O points         |   | 32 points (I/O assignment: Intelligent 32 points) |  |
| 5 V DC internal current consumption   |   | 0.60 A  |  |
| Weight                                |   | 0.18 kg   |  |

\*2: For the maximum segment length (a length between hubs), consult with the manufacturer of the switching hub used.

\*3: This applies when a repeater hub is used. For the number of levels that can be constructed when a switching hub is used, consult with the manufacturer of the switching hub used.

## Serial Communication Modules

RS-232  
RS-422/485


### LJ71C24

Max. communication speed: 230.4 kbps<sup>\*1</sup>  
MC protocol communications  
Predefined protocol support function  
<sup>\*1</sup>: Available for only channel 1

MODBUS®

RS-232




### LJ71C24-R2

Max. communication speed: 230.4 kbps<sup>\*1</sup>  
MC protocol communications  
Predefined protocol support function  
<sup>\*1</sup>: Available for only channel 1

MODBUS®

## Quick connection using predefined protocols

The predefined protocol enables easy setup of protocols to communicate with external devices using GX Works2. Connections are quickly setup by selecting the target device from the communications protocol library.

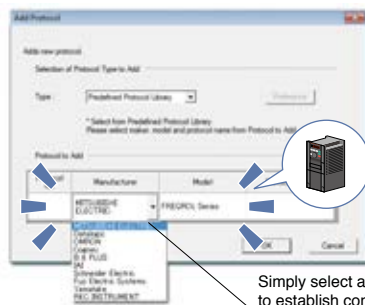


Simply select a device you want to establish communication with

## Easy to create/edit of predefined protocols

Easily create or edit predefined protocols from within the communications library.

Even if the target device protocol is not listed, it can be added easily to the existing library.

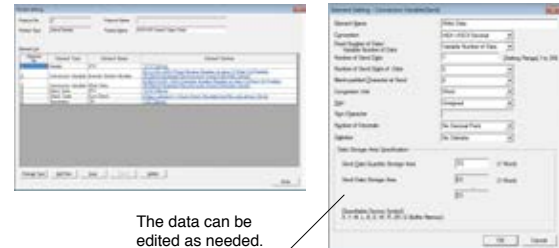

The data can be edited as needed.


## Specifications

| Item                                |                        | LJ71C24   | LJ71C24-R2                         |
|-------------------------------------|------------------------|---|------------------------------------|
| Interface                           | CH 1                   | RS-232 compliant (D-Sub 9P female)  | RS-232 compliant (D-Sub 9P female) |
|                                     | CH 2                   | RS-422/485 compliant (2-piece terminal block)   | RS-232 compliant (D-Sub 9P female) |
| Communication system                | Line                   | Full-duplex/half-duplex communications  |                                    |
|                                     | MC protocol            | Half-duplex communications  |                                    |
|                                     | Predefined protocol    | Full-duplex/half-duplex communications  |                                    |
|                                     | Nonprocedural protocol |   |                                    |
| Synchronization method              | Bidirectional protocol |   |                                    |
|                                     |                        | Asynchronous method   |                                    |
| Transmission speed                  |                        | 50 bps/300 bps/600 bps/1200 bps/2400 bps/4800 bps/9600 bps/14.4 kbps/19.2 kbps/28.8 kbps/38.4 kbps/57.6 kbps/115.2 kbps/230.4 kbps  |                                    |
|                                     |                        | Transmission speed 230.4 kbps is only available for channel 1.  |                                    |
|                                     |                        | Total transmission speed of two interfaces is available up to 230.4 kbps. Total transmission speed of two interfaces is available up to 115.2 kbps when the communication data monitoring function is used.             |                                    |
| Data format                         | Start bits             | 1   |                                    |
|                                     | Data bits              | 7 or 8  |                                    |
|                                     | Parity bits            | 1 (vertical parity) or none   |                                    |
|                                     | Stop bits              | 1 or 2  |                                    |
| Error detection                     | Parity check           | All protocols and when ODD/EVEN is selected by parameter.   |                                    |
|                                     | Sum check code         | MC protocol/bidirectional protocol selected by parameter.<br>For the predefined protocol, whether or not a sum check code is needed depends on the selected protocol.<br>Nonprocedural protocol selected by user frame. |                                    |
| Transmission control                |                        |   |                                    |
|                                     |                        |   |                                    |
|                                     |                        |   |                                    |
|                                     |                        |   |                                    |
|                                     |                        |   |                                    |
|                                     |                        |   |                                    |
| Module size allocation              |                        | 1   |                                    |
| Number of occupied I/O points       |                        | 32 points (I/O assignment: Intelligent 32 points)   |                                    |
| 5 V DC internal current consumption |                        | 0.39 A  | 0.26 A                             |
| Weight                              |                        | 0.17 kg   | 0.14 kg                            |

Increase productivity and lower the total cost of ownership

# GX Works2

GX Works2 focuses on driving down total cost by including features that speed up commissioning, reduce downtime, improve programming productivity, and provide strong security.

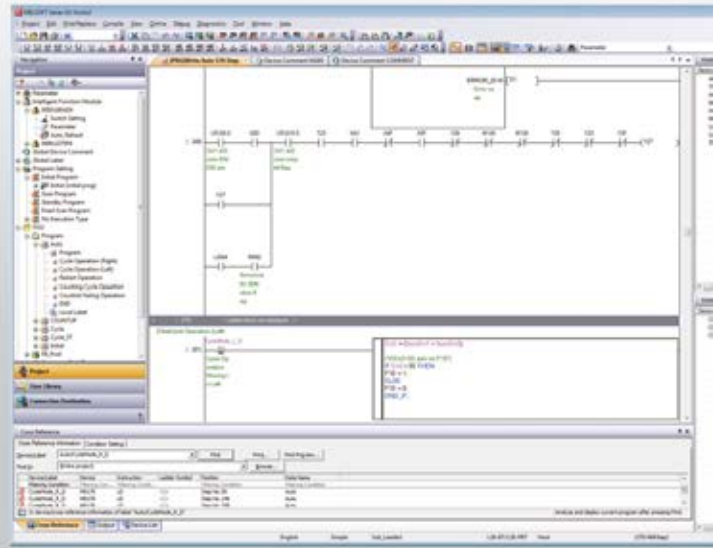

## User interface that is "easy to use" by design


The programming tool GX Works2 has been developed from the ground up to be intuitive for all users and allow anyone to begin programming easily. The user interface and other functions provide a comfortable programming environment that enables improvements in design efficiency.

Fully integrated intelligent function module management tools.

Use tabs to easily switch between programs, parameters, and other screens.

Improve readability by hiding ladder rungs not relevant to the current operation.

Use "Watch windows" to conveniently monitor pertinent values.

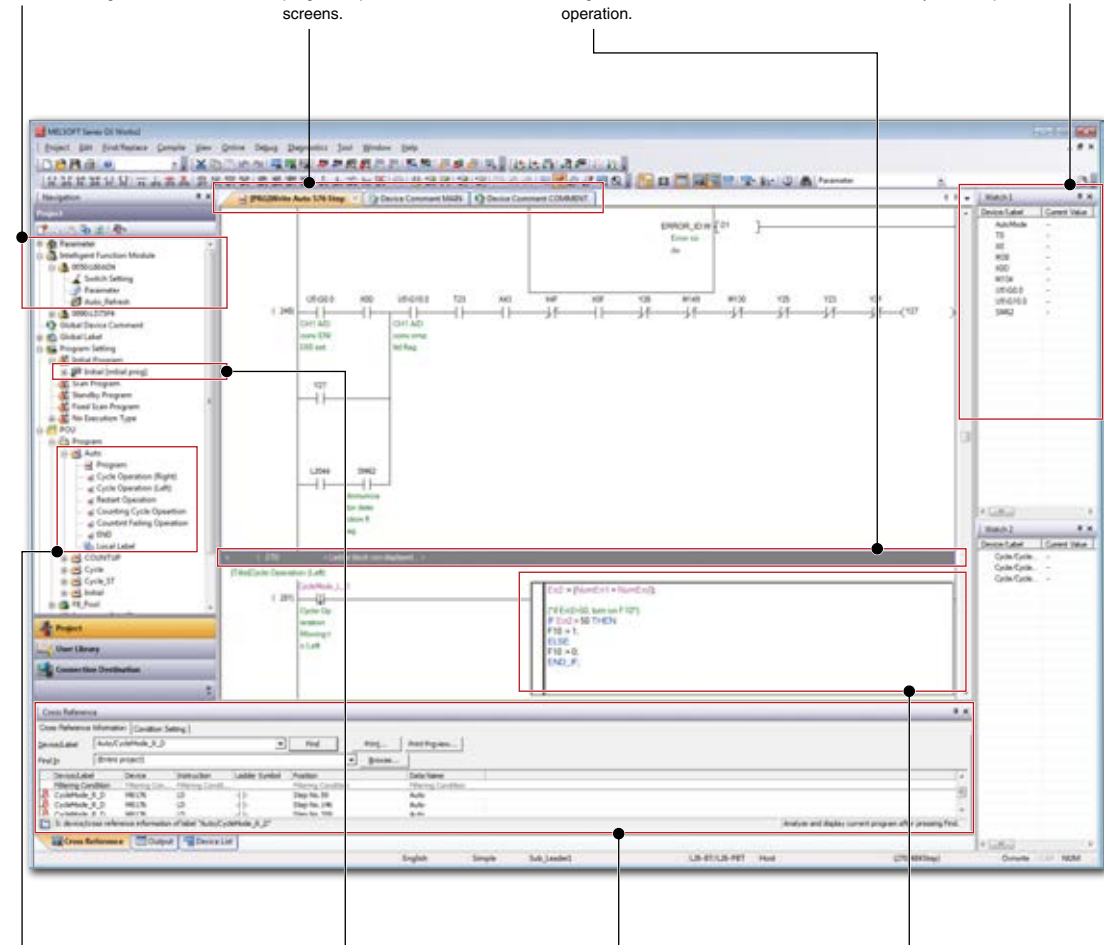

Project tree gives compressive look at flow of information in program and structure.

Program titles help to identify the content of each program.

Cross reference devices and labels with ease.

Use the Inline-ST\*1 feature to quickly write complex expressions in ladder programs.

\*1: In-line ST can be only be created in projects that use labels.



## Easily create circuits with few key inputs

The program can be easily modified using the keyboard shortcut [ Alt ] + [ ← ] / [ → ] or [ Alt ] + [ ↑ ] / [ ↓ ] keys.

**■ Editing the circuit**  
 [Alt]+[→] ... MOV→D0→K4Y0  
 [Alt]+[←] ... K4Y0→D0→MOV

**■ Changing the device No.**  
 [Alt]+[↑] ... K4Y0→K4Y1→K4Y2  
 [Alt]+[↓] ... K4Y2→K4Y1→K4Y0

**Easy-to-read display**

The number of contacts on one line can be changed to 9, 11, 13, 17 or 21 contacts.

The circuit line doesn't wrap, easier to read.

Click the Undo button.

**Undo**

Use Undo ([Ctrl] + [Z]) to go back to up to 30 previous input steps.

The device number is automatically incremented when repeatedly pasting a cut/copied ladder rung.

**Continuous Paste**

| Copy Source Device | After Increment | Increment Value |
|--------------------|-----------------|-----------------|
| Y000.0             | Y000.1          | 1               |
| X00                | X01             | 1               |
| T27                | T28             | 1               |
| L204H              | L205            | 1               |
| SM2                | SM3             | 1               |
| LSV000.0           | LSV000.1        | 1               |
| T23                | T24             | 1               |
| RA0                | RA1             | 1               |

\* Setting range for increment value is within the range of -9999 to 9999 (DEC).  
 \* Read constant, devices in nine ST will not be incremented.  
 \* Paste under Insert Mode.

## Efficiently edit lines with keyboard

Ladder rungs can be easily modified just by using the various keyboard shortcut keys, eliminating the need to switch to editing mode.

Input line with [Ctrl] + [→] or [Ctrl] + [↓]


Input lines up to coil in batch with [Ctrl] + [Shift] + [→]

(Batch input lines in a vertical direction with [Ctrl] + [Shift] + [↓])

**■ How to input a line**  
 Press [Ctrl] + [→] or [Ctrl] + [↓] at an empty spot.  
 Press [Ctrl] + [←] or [Ctrl] + [↑] on top of a line to delete it.


## Use function blocks for common operations

Function blocks allow selections of commonly used code to be easily reused and shared among projects. Shared or created function blocks can be added to a program using simple drag and drop operation. Using function blocks effectively results in faster development times with fewer programming mistakes.

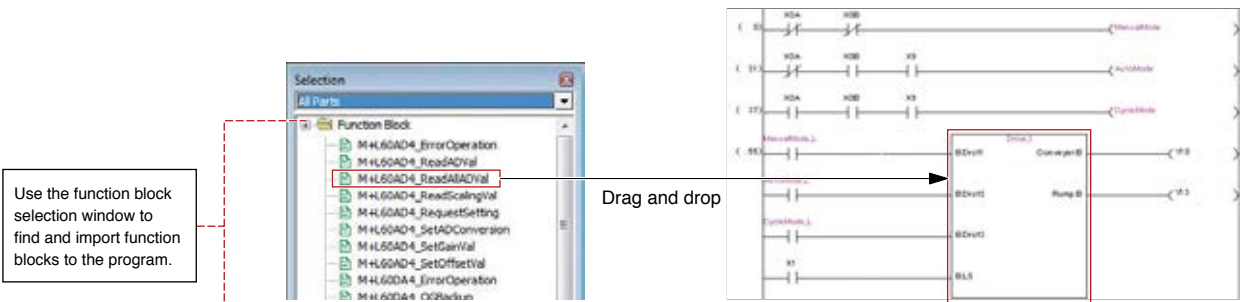


## Use sample comments to eliminate the need to input comments

Sample comments are provided for the CPU's special relays/registers and the intelligent function module's buffer memory/XY signals. These can be copied into the project's comments thus greatly reducing the time required for entering device comments.

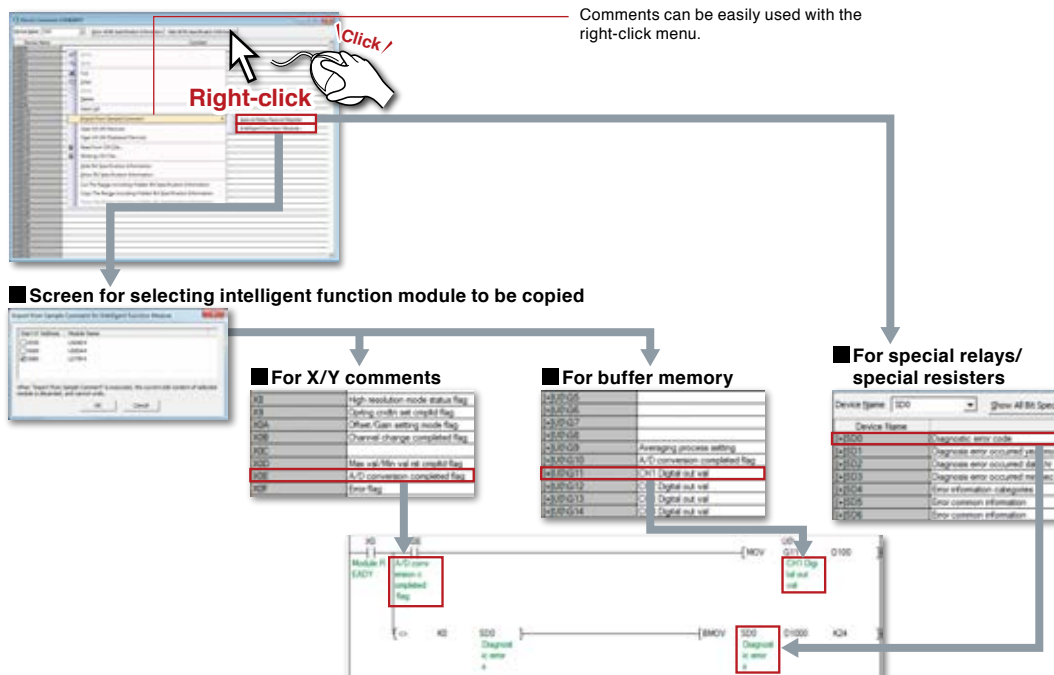

## Quickly identify similar devices

Word device comments can be registered per bit with the contents displayed directly on the ladder rung.

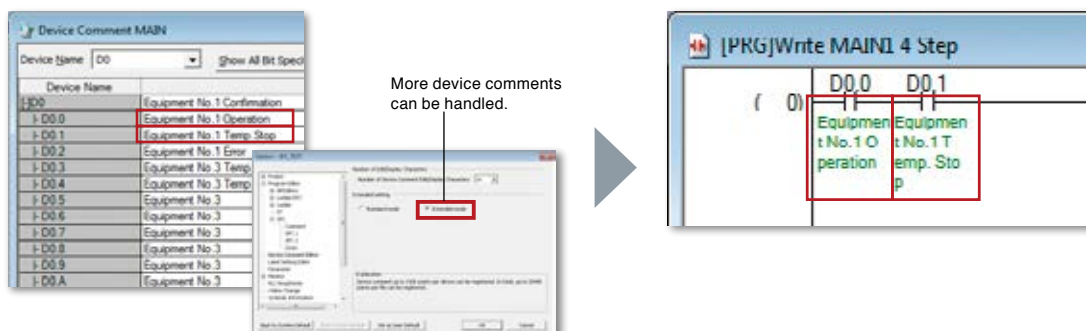




## Integrating the intelligent function module setting tool (GX Configurator)


The intelligent function module's setting functions have been unified with GX Works2.  
Manage the intelligent function module's setting with a GX Works2 project.

### New module addition screen

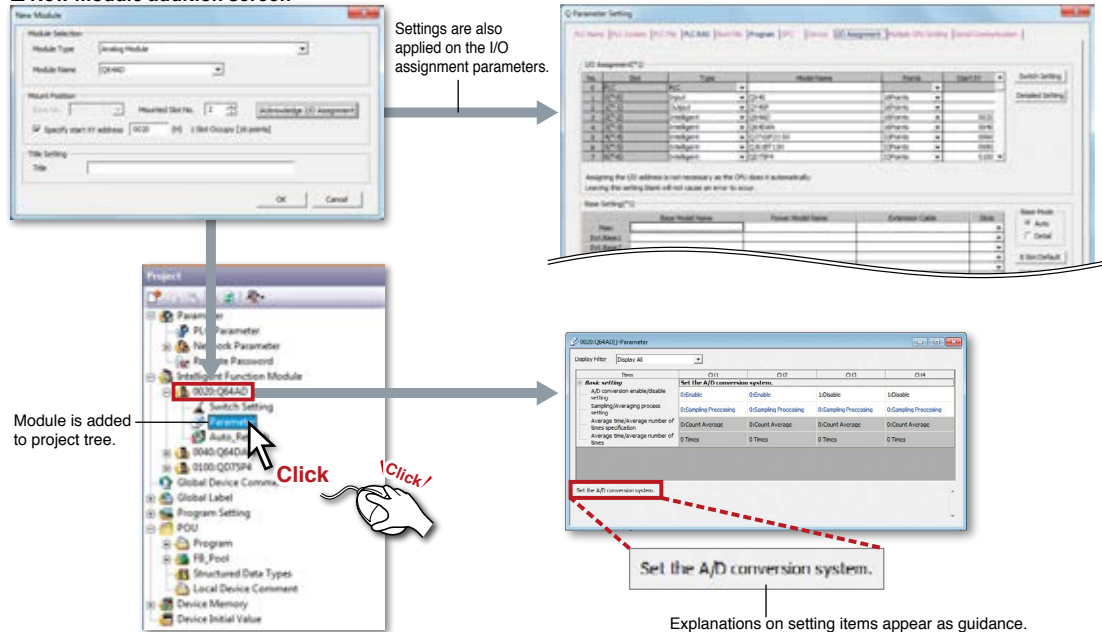

## System monitor and PLC diagnostics

Operation status of the entire programmable controller system is clearly displayed.  
Each module's diagnosis and detailed information are displayed enabling faster troubleshooting.

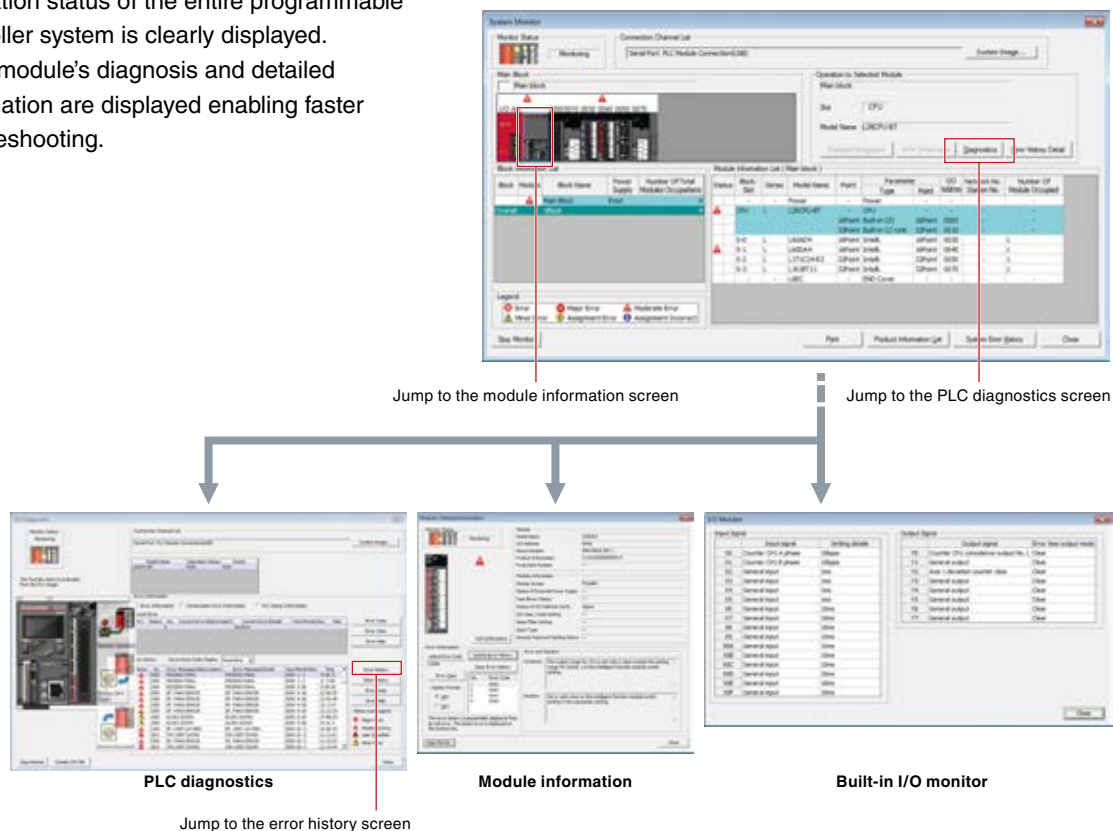



## Time-stamped error history list

Simplify troubleshooting with a combined, time-stamped, error history list for the CPU and all expansion modules. The details section provides explanations of error codes and suggested solutions.


Quickly identify the error, its cause, and solution without the need to reference a manual.

## Set parameters and monitor the sensor

Parameter settings and monitoring can be performed on the third-party partner products, which support the iQ Sensor Solution (iQSS). Sensor connection and current values can be checked visually, allowing the user to act faster in case of a trouble.

Parameters can be set.

Status can be monitored.

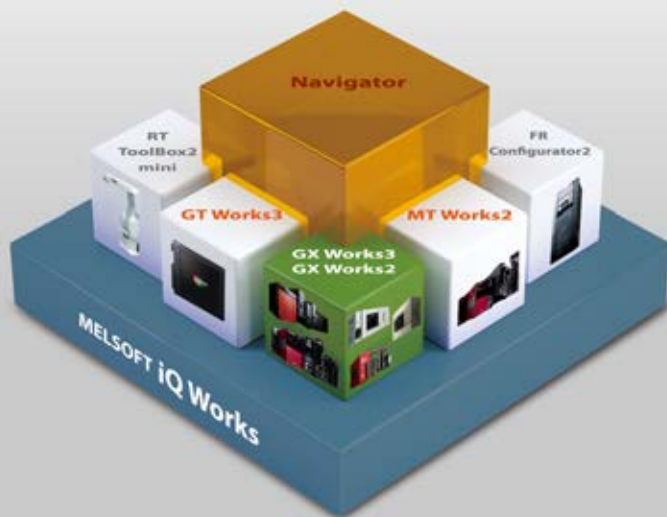


## MELSOFT iQ Works

### Next Generation Integrated Engineering Environment

MELSOFT iQ Works is an integrated software suite consisting of GX Works3, GX Works2, MT Works2, GT Works3, RT ToolBox2 mini and FR Configurator2. The advantages of this powerful integrated software suite are that system design is made much easier with a substantial reduction in repetitious tasks, cutting down on errors while helping to reduce the overall TCO.

### Graphical project management


The entire control system is represented using the "Network Configuration", "Module Configuration" and field network configuration windows. System components are easily added using a drag & drop interface, and the validity of the system can be confirmed using the check function to ensure parameters are configured correctly, the power supply is sufficient, etc. Different programmable controller and GOT (HMI) projects can be grouped together (for example by factory, line, and cell) for central management.

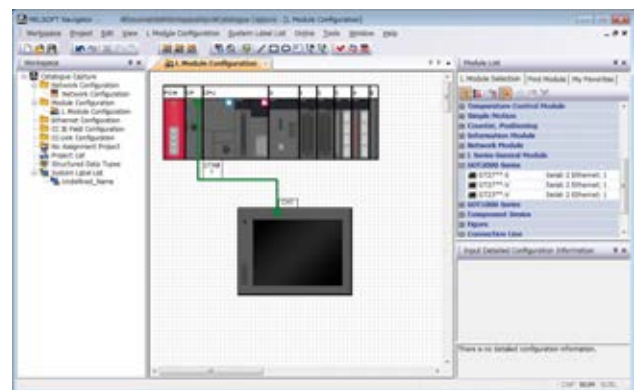


### Read project data for multiple devices in a batch

Multiple projects can be read as a block just by having one connection to the programmable controller. If there are multiple devices such as other CPU or GOT(HMI) on the same network as the target master programmable controller, it is possible to upload all projects to each target device without having to individually connect to each device.

Upload all projects at once

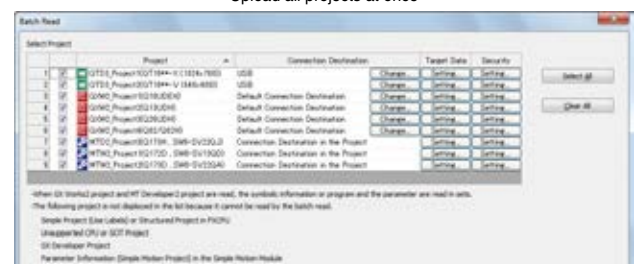

MELSOFT Navigator

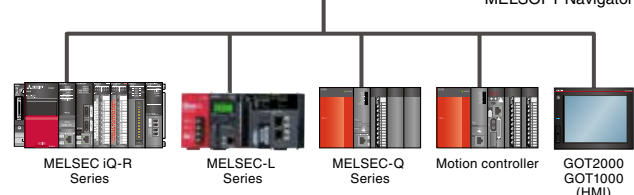



## Automatically start up the relevant maintenance software with a single click

Just double-click on the corresponding project in the system configuration diagram or workspace tree to automatically startup the software relevant for that device. Maintenance can be efficiently performed without having to know and startup each relevant software manually.

Double-click on corresponding project in workspace tree



Double-click on corresponding device in system configuration diagram



Software for corresponding device automatically startup

GX Works3

GX Works2

MT Works2

GT Works3

RT ToolBox2 mini

## Set up field network slave stations


There's no need to prepare a dedicated tool to check or change the parameter settings of a slave station on-site. The latest version of iQ Works includes slave station setting utility. Inverter parameters, for example, can be confirmed or changed for speed adjustment directly from the field network configuration window. In addition, error information can be read easily.

CC-Link IE

CC-Link


Ethernet

AnyWireASLINK

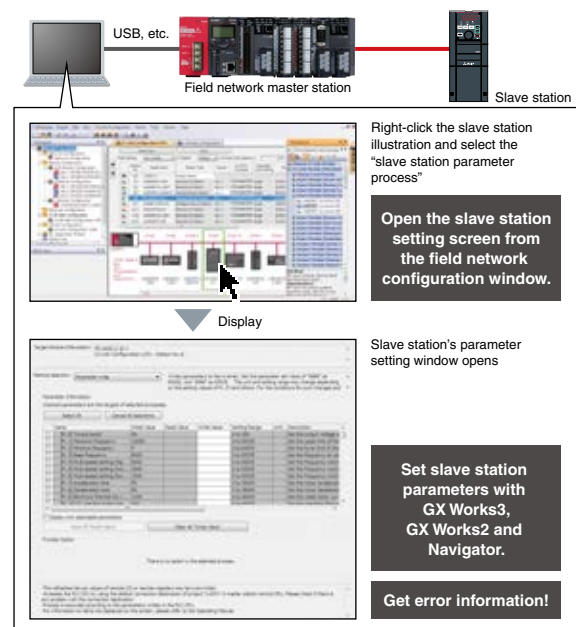

## Prepare a device from the system configuration diagram with no manual inputs

A list of modules used can be exported as a CSV file from the system configuration diagram. This is particularly useful when utilizing data for creating a bill of materials (BOM) in Excel®, etc.

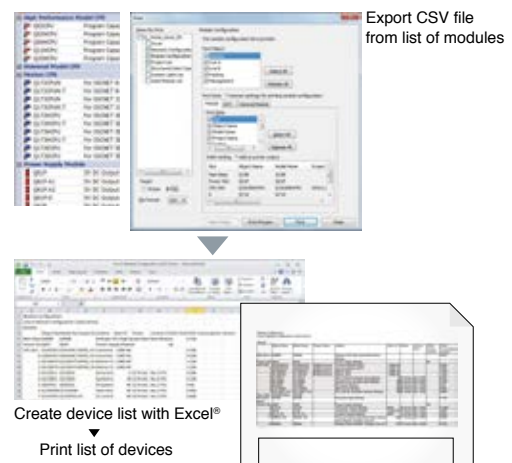



## GX LogViewer


### Visualizing the production process

Within modern manufacturing needs, data collection has become more important for fully optimizing the production process. GX LogViewer is a software tool that realizes visualization of large amounts of production data in a simple to use format. Utilizing this functionality to identify root error causes and improving the production rate.

### Easily display and analyze large amounts of collected logging data

This tool is used when large amounts of data need to be visualized and collected from the MELSEC-Q Series or MELSEC-L Series.

The connection settings and checking of log files are the same as GX Works2 enabling individual connections to each module.

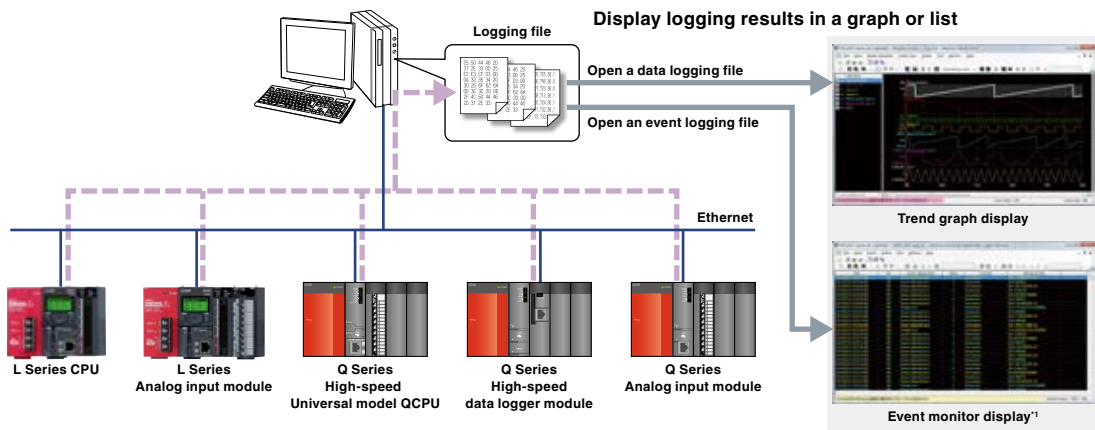


\*1: The event monitor display is supported only with the Q Series high-speed logger module.

### Easily adjust graphs without referring to the setup manual


#### Arranging graphs

Able to arrange each graph so as not to overlap each other. It is easier to display the graphs as each graph is evenly spaced out.




#### Overlapping graphs

With this it is possible to overlap each graph over one another. Multiple graphs can be compared enabling easier data analysis and comparison.




#### Automatically adjusting graphs

Various attributes of the graph are automatically adjusted (max/min values) as to display the upper and lower limit values better.

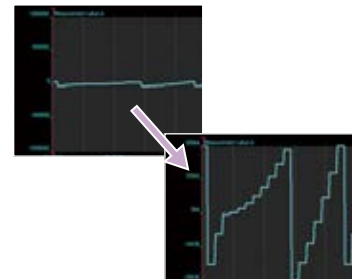

## Easily confirm changes in data with dual cursors


Data changes within a designated time frame can be quickly checked with user-friendly dual cursors (multi-cursors). When the cursors are moved to the point at which changes are to be confirmed, the difference in time and value between those points will appear.

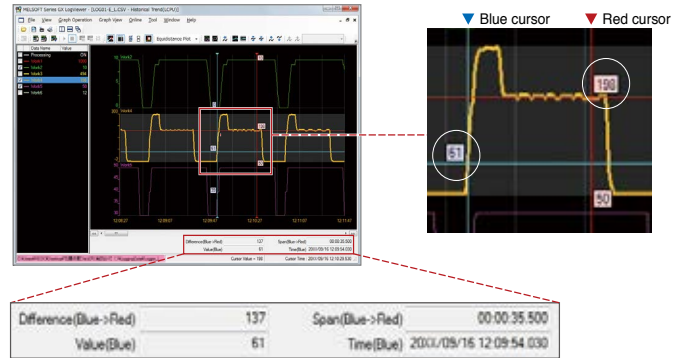

The difference in time and value between the cursors is automatically calculated and displayed.

## Display data for multiple files within one graph area for easy comparison

Data for multiple files are displayed with the same time units in the same graph area. The display position within a file can be moved easily. This allows the differences of data within multiple files to be confirmed easily.

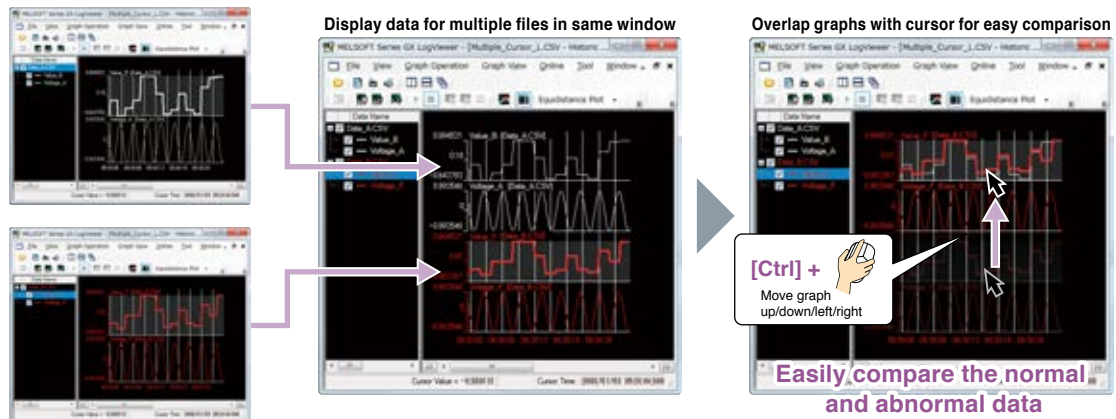

## Quickly jump cursor to designated position

### Cursor jump

Confirm data values by quickly moving the cursor to a designated value, time or index position in the trend graph.




**Value search**  
Values are searched, and the cursor jumps to the position where the conditions match.

**Time designation**  
The cursor jumps to the designated time.


**Index designation**  
The cursor jumps to the designated index.

## CPU modules


L02SCPU, L02SCPU-P

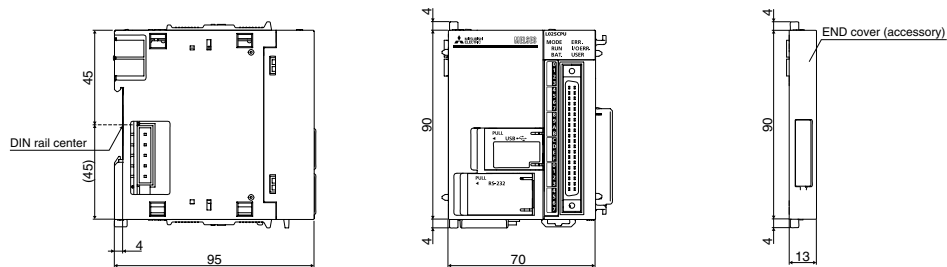

L02CPU, L02CPU-P, L06CPU, L06CPU-P, L26CPU, L26CPU-P

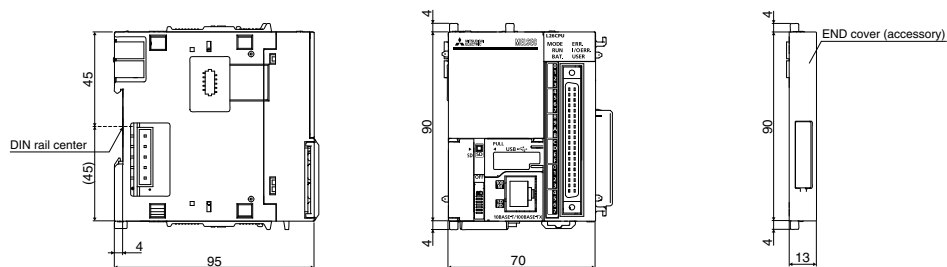


L26CPU-BT, L26CPU-PBT

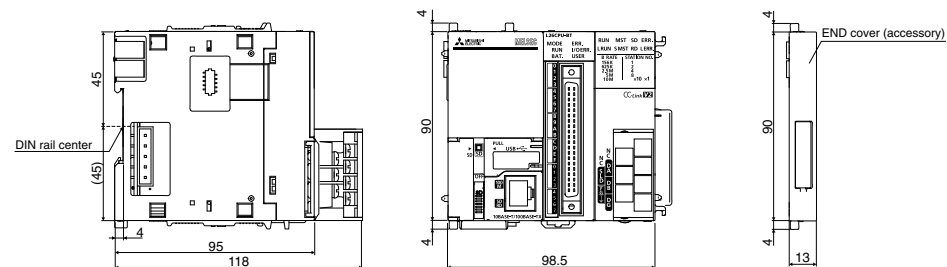


## Display unit

L6DSPU

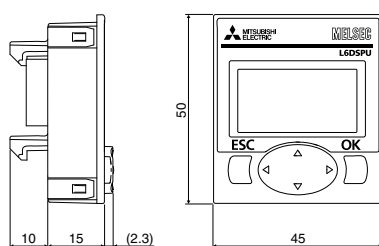

## RS-232 adapter


L6ADP-R2

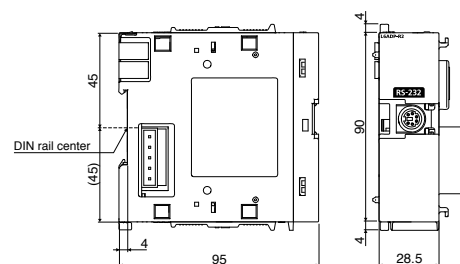

Unit: mm


## RS-422/485 adapter

L6ADP-R4

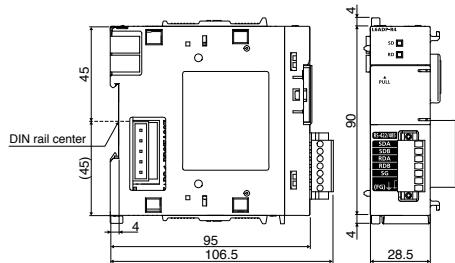


## END cover with error terminal

L6EC-ET

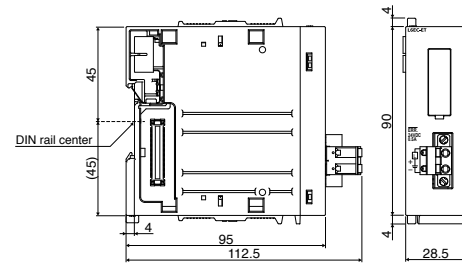


## Power supply modules

L61P, L63P

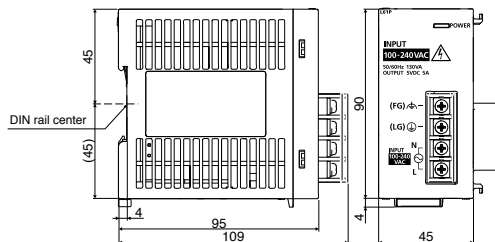


L63SP

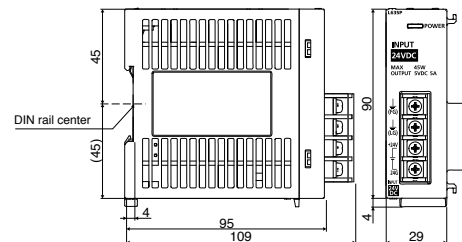


## Branch module

L6EXB

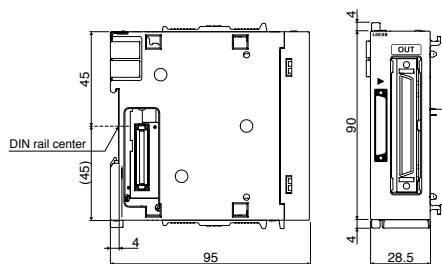


## Extension module

L6EXE

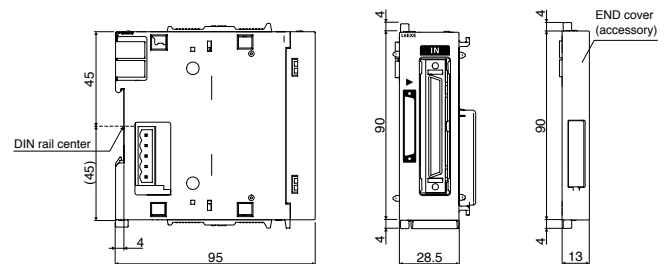

## Extension cable


LC06E, LC10E, LC30E

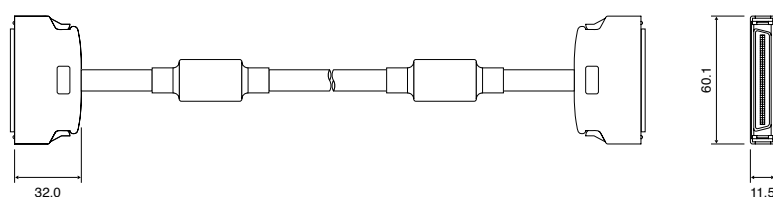


Unit: mm

## Input/Output/I/O combined modules


LX10, LX28, LX40C6, LY10R2, LY18R2A  
LY20S6, LY28S1A, LY40NT5P, LY40PT5P

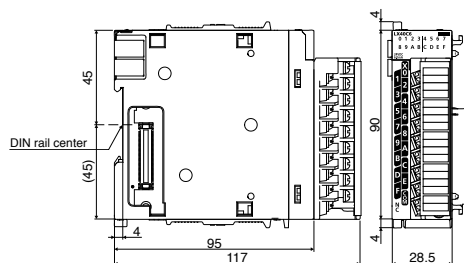


LX41C4, LY41NT1P, LY41PT1P

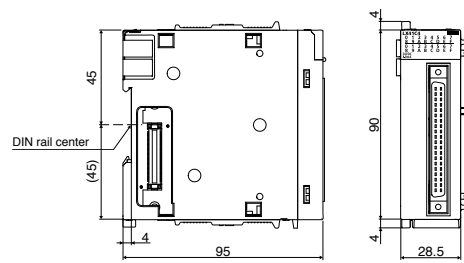


LX42C4, LY42NT1P, LY42PT1P  
LH42C4NT1P, LH42C4PT1P

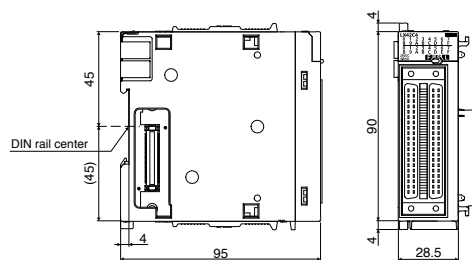

LG69

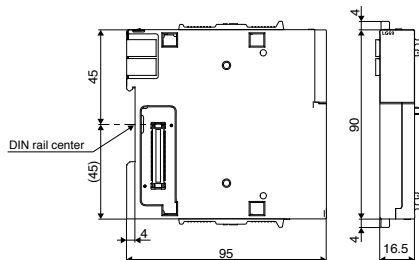


L6TE-18S




## Multiple input (voltage/current/temperature)/Analog input/output/I/O module

L60MD4-G, L60AD4, L60DA4, L60ADVL8, L60ADIL8,  
L60AD4-2GH, L60AD2DA2

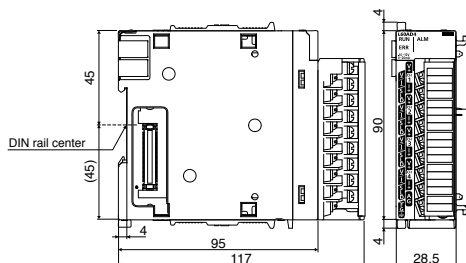


L60DAVL8 **NEW**, L60DAIL8 **NEW**

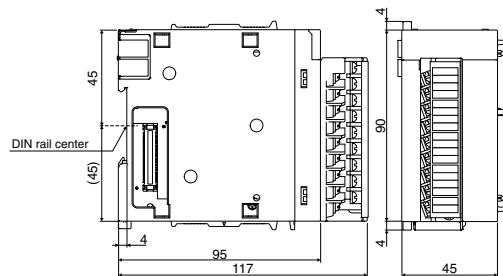

## Temperature input module

L60RD8

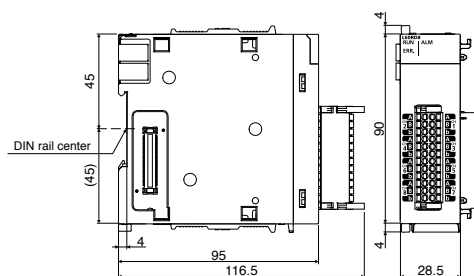


Unit: mm




## Temperature control modules

L60TCTT4, L60TCRT4

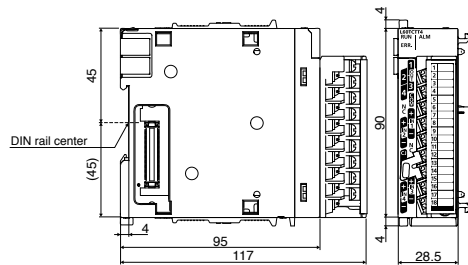


L60TCTT4BW, L60TCRT4BW

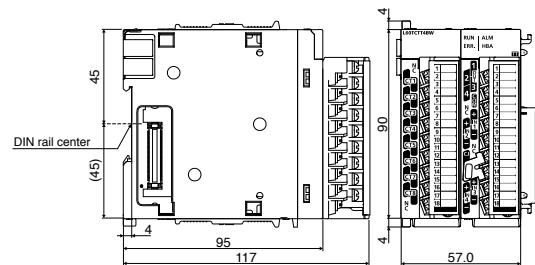


## Simple motion modules

LD77MS2, LD77MS4, LD77MS16

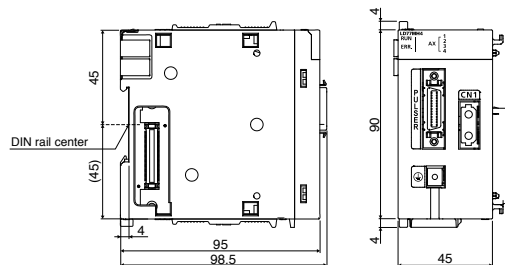


## Positioning modules


LD75P1, LD75P2

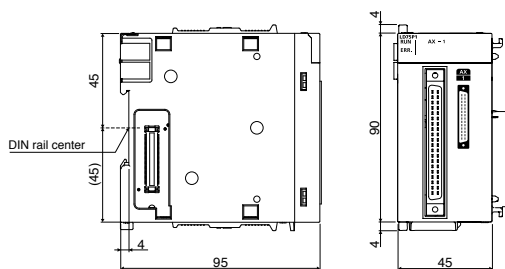


LD75D1, LD75D2

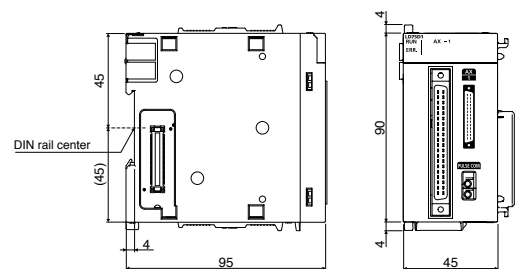

LD75P4

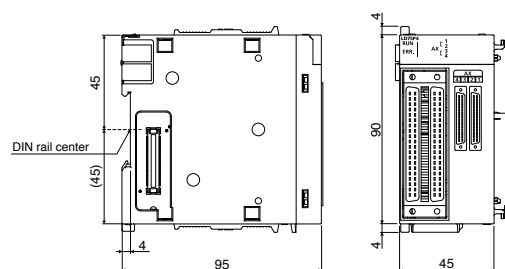


LD75D4

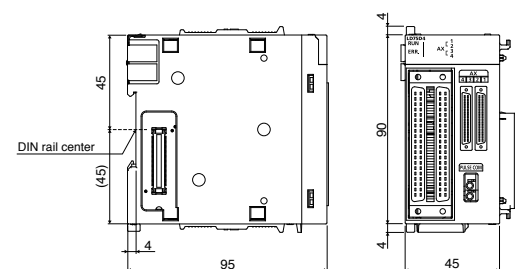

Unit: mm


## Flexible high-speed I/O control module

LD40PD01

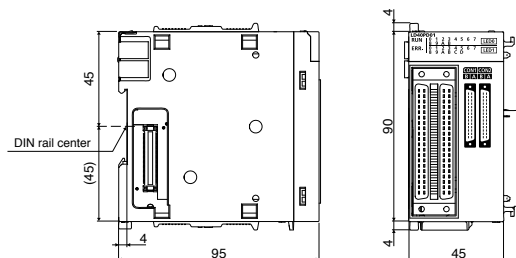


## High-speed counter module

LD62, LD62D

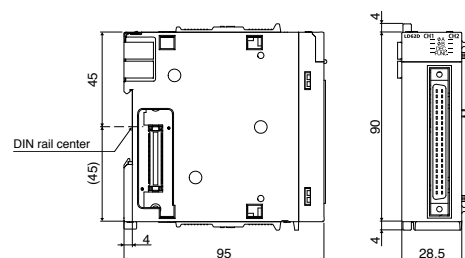


## CC-Link IE Field Network master/local module

LJ71GF11-T2

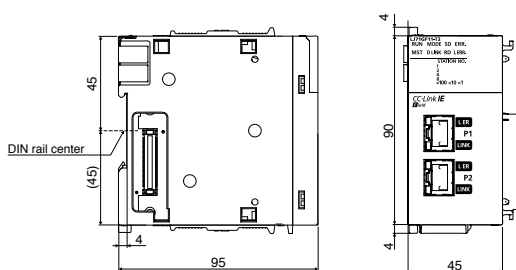


## CC-Link IE Field Network head module

LJ72GF15-T2

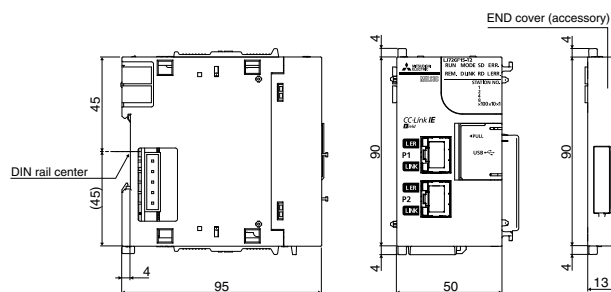


## CC-Link master/local module

LJ61BT11

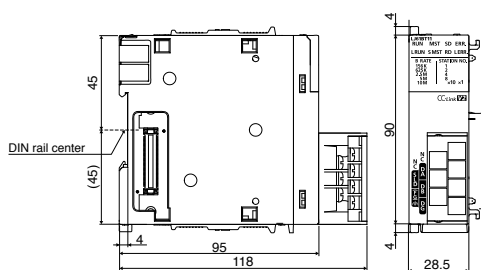

## CC-Link/LT master module


LJ61CL12

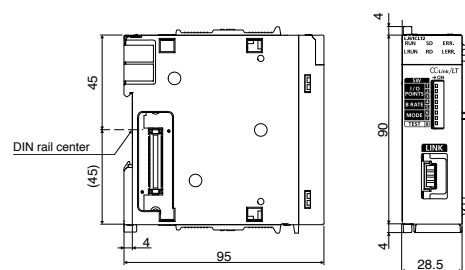

Unit: mm


## AnyWireASLINK master module

LJ51AW12AL DB

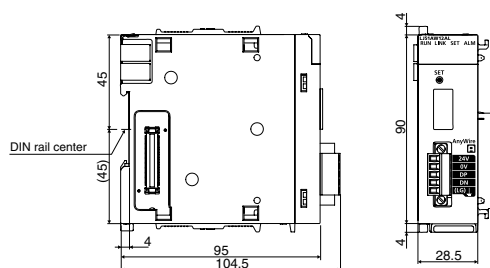


## SSCNET III/H head module

LJ72MS15

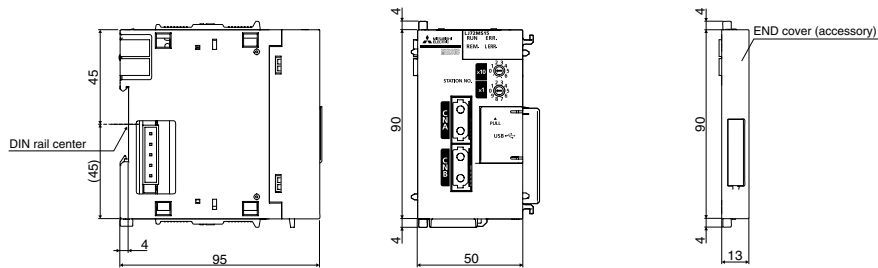


## Ethernet interface module

LJ71E71-100

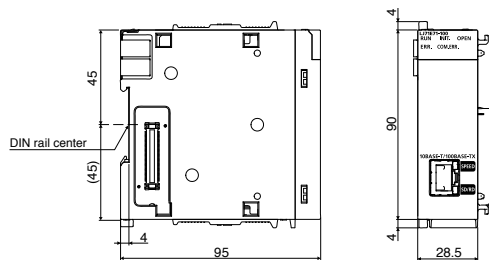


## Serial communication modules

LJ71C24

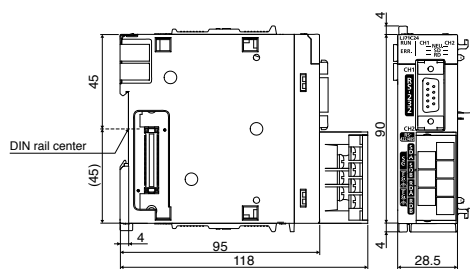

LJ71C24-R2

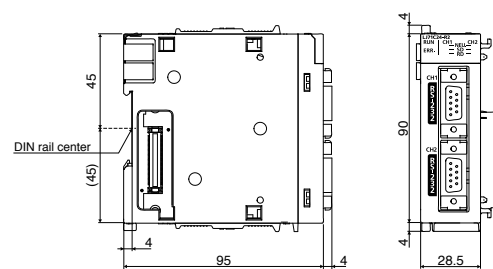

Unit: mm



# iQSS

## iQ Sensor Solution

# A tool for connecting! Visualizing! For a more seamless sensor control!

Sensors used on the manufacturing floor are becoming more intelligent and complex, requiring even more maintenance of equipment and the overall management of various configuration setup software. With iQSS, the intelligent sensor solution provided by Mitsubishi Electric, configuration and maintenance of sensors are further simplified with the connectivity to other components such as automation controllers, HMIs, and engineering software even further enhanced reducing the overall TCO\*.


\* Total Cost of Ownership

For further details, please refer to the "iQ Sensor Solution Catalog".



L(NA)16029ENG

**iQSS** connects everything from  
general to advanced sensors.



Ethernet

CC-Link IE

CC-Link

AnyWireASLINK

**COGNEX**  
**Panasonic**

**Anywire**  
**BALLUFF**  
sensors worldwide


**OPTIX**  
**F A**  
**MEE**



**MITSUBISHI ELECTRIC**

### System design

To manage projects simply, we provide a workspace tree that enables projects to be managed in a single location, and a system configuration chart that depicts the entire system graphically.

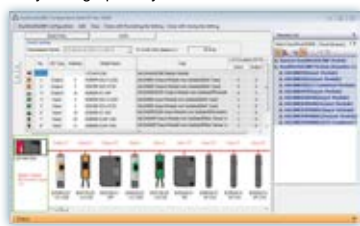

System configuration management

### Implementation


Functions are provided that allow monitoring from a single screen based on the system configuration chart so that the causes of problems can be identified quickly. This also shortens the time taken to adjust sections involving multiple devices.



Monitoring

### Programming

The labels used by PLCs can also be used by HMIs and sensors. This takes all the bother out of label setting. GOT sample screen libraries, sample ladders and function blocks, etc. are supported.

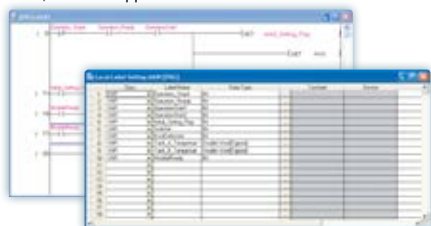

Label programming

# iQSS

### Operation & maintenance

To make backups less laborious, batch read/write functions are provided for PLC, HMI and sensor settings.



Sensor configuration read/write

Further simplifying the management of sensors in the control system



# COGNEX® machine vision system and Mitsubishi Electric FA Devices

## Innovating your production with this integral power.

Functioning as devices that “watch” instead of human eyes, COGNEX machine vision systems have continued to reform automation of production lines. Mitsubishi Electric FA devices, such as programmable controllers, lead the future of automation. The possibilities of vision system solutions, created in the integration of this spirit of innovation, have continued to increase.



L(NA)08230E

For further details, please refer to the “Vision System & Factory Automation Solution Catalog”.

L Series Features

CPU

I/O

Analog/  
Temperature  
Control

Simple Motion/  
Positioning

Flexible I/O/  
High-Speed  
Counter

Network

Software

Related Products


### COGNEX In-Sight EZ Series iQSS ready! Device partner

- Entry model ..... **EZ-700**
- Standard model ..... **EZ-720**
- High-speed processing model ..... **EZ-740**
- High resolution model ..... **EZ-742**

#### Simple connection

##### Directly connect with Ethernet

The “In-Sight EZ” can be directly connected to the Ethernet port provided on the “MELSEC-Q Series universal model” and “MELSEC-L” programmable controller, and to the Ethernet interface module on the MELSEC-F. By using a switching hub, a multi-unit vision system having units installed as far as 100 m away can be created.



#### Simple communication with SLMP

Now that “In-Sight EZ” supports SLMP, data can be easily written from the vision system to the programmable controller. Communication is easily configured with “EasyBuilder”. Just select the connected device and SLMP, set the programmable controller device used for communication and select the communication data from the list. With the SLMP scanner mode, a trigger can be applied on the vision system via SLMP.

#### Simple control with function blocks (FB)

Intuitively setup the vision control system from the GX Works2 programming tool utilizing dedicated vision function blocks without having to develop specific programming code.

### COGNEX DataMan® Barcode Reader Device partner

- Fixed DataMan ..... **DataMan 50/60/300**
- Hand-held DataMan ..... **DataMan 8050/8100/8500**

#### DataMan - active in various industries



Automotive components



Aero space



Medical devices



Electronic components

##### ●Fixed DataMan 50/60

- ▶ Unmatched read rate performance with Hotbars™
- ▶ Proprietary Hotbars™ technology
- ▶ Solid state design with no moving parts
- ▶ Easy setup with three position adjustable lens and integrated lighting aimer
- ▶ IP65-rated housing (DataMan 50)
- ▶ Supports SLMP (DataMan 60)



DataMan 50




DataMan 60

##### ●Fixed DataMan 300 Series

- ▶ Unprecedented read rate with Hotbars™
- ▶ Reads the most difficult-to-read 2-D Direct Part Mark (DPM) codes
- ▶ Liquid lens with automatic variable focus
- ▶ Intelligent tuning
- ▶ Integrated lighting module
- ▶ Supports SLMP



DataMan 300

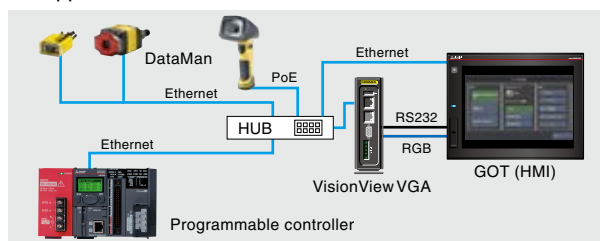

##### ●Hand-held DataMan 8050/8100/8500 Series

- ▶ UltraLight®: Two types of lighting enable optimum reading\*1
- ▶ Newly developed body enhances sturdiness
- ▶ Standard automatic focus adjustment function\*2
- ▶ Supports SLMP
- ▶ Cordless capability (up to 30 m communication range)
- ▶ Unprecedented read rate with Hotbars™



DataMan 8500

\*1: DataMan 8500

\*2: DataMan 8100 and 8500



## Contactors and Motor Starters

# Diverse variations to respond to all situations

The Mitsubishi Electric Contactors and Motor Starters MS-T and MS-N series and DC interface contactor SD-Q series products are equipped with an environment and global compliance, compact size, ease-of-use and safety. Certification to various international standards, this highly reliable magnetic contactor is suitable for a variety of applications from panels to systems.


For further details, please refer to the "Magnetic Motor Starters and Contactors MS-T/N series Catalog".



L(NA)02030



L(NA)74109218

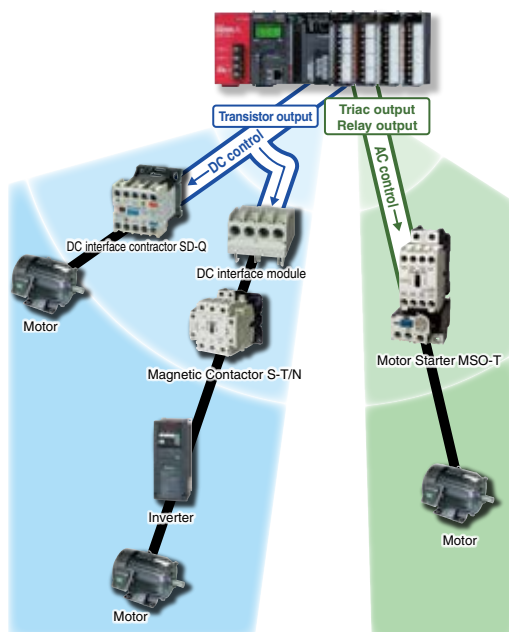

## Direct drive with Programmable Controller

MS-T, MS-N, and SD-Q series have small operating coil VA. This means these contactors, especially the SD-Q, are operable with 24 V DC 0.1 A transistor outputs without amplifier relays.

● Connectable ○ Connectable with some restrictions – Not connectable

|                                    |  | Programmable controller output module type |                |              |
|------------------------------------|--|--|----------------|--------------|
|                                    |  | Transistor output                          | Contact output | Triac output |
| DC interface contactor SD-Q Series | DC operation                             | ●  | ●              | —            |
|                                    | AC operation (Using DC interface module) | ●  | ●              | ○            |
| Magnetic contactor MS-T Series     | DC operation                             | ○  | ○              | —            |
|                                    | AC operation (Using DC interface module) | ●  | ●              | ○            |
| Magnetic contactor MS-N Series     | DC operation                             | ○  | —              | —            |

\*: This table shows the relation of the programmable controller output module type and operation interface. There may be restrictions according to the type of frame size, etc., that can be used. Refer to the MS-T/N Series Catalog, or contact a Mitsubishi dealer or Sales Office for details on the types of magnetic contactors and models that can be used.

## SD-Q series

Direct drive is possible with the programmable controller's transistor output. Since a relay and interface module are not required, the number of parts can be reduced, and space can be saved.

### Standard surge absorber

Prevent adverse effects onto the peripheral equipment.

### Standard terminal cover

A terminal cover with finger protection function is installed as a standard.  
This cover answers to user's needs for safety.


## MS-T series (10A to 100A)

Mitsubishi Electric's main series is equipped with a small size, ease-of-use, safety and international compliance. This series greatly contributes to smaller panels, easier selection and compliance with international standards.

### 10A frame model is just 36 mm wide!!

The industry's smallest width\*<sup>1</sup> has been realized for the general-purpose magnetic contactor. The other rated products have also been downsized to help you reduce your panel size.

\*1: 10A frame general-purpose magnetic contactor (Mitsubishi Electric survey as of Feb. 2016)

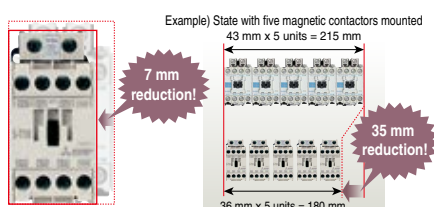

### Wide range of operation coil ratings!!

The wider operation coil rating ranges allow us to consolidate the number of coil types from 14 types (N Series) to 8 types. This helps reduce stock and makes it easier to select the required type.

### Standard terminal cover!!


The standard terminal cover\*<sup>2</sup> improves the safety in the panel, and simplifies ordering as a separate model no longer needs to be specified.

\*2: Applicable frame is 10A to 50A.



# Extensive global support coverage providing expert help whenever needed

## ■ Global FA centers

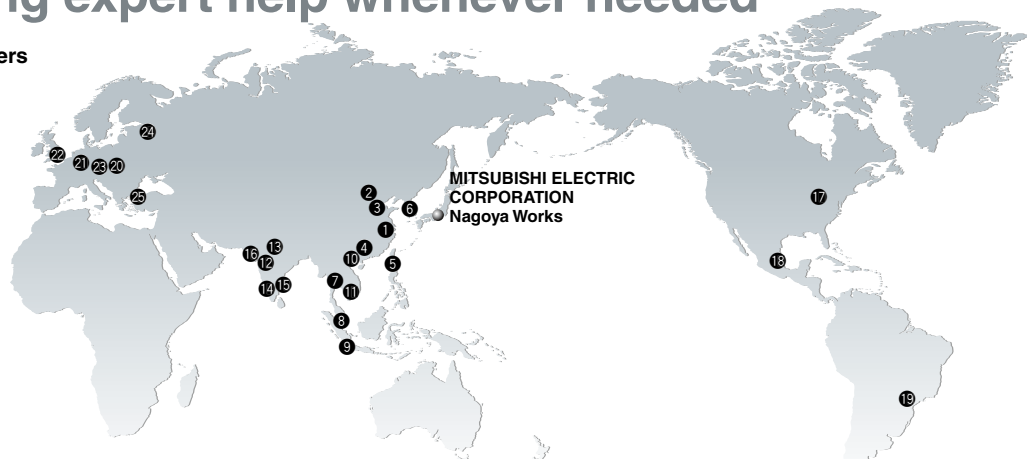

### China

#### ① Shanghai FA Center

**MITSUBISHI ELECTRIC AUTOMATION (CHINA) LTD. Shanghai FA Center**

Mitsubishi Electric Automation Center, No.1386 Hongqiao Road, Shanghai, China  
Tel: +86-21-2322-3030 / Fax: +86-21-2322-3000

#### ② Beijing FA Center

**MITSUBISHI ELECTRIC AUTOMATION (CHINA) LTD. Beijing FA Center**

Unit 901, Office Tower 1, Henderson Centre, 18 Jianguomennei Avenue, Dongcheng District, Beijing, China  
Tel: +86-10-6518-8830 / Fax: +86-10-6518-2938

#### ③ Tianjin FA Center

**MITSUBISHI ELECTRIC AUTOMATION (CHINA) LTD. Tianjin FA Center**

Room 2003 City Tower, No.35, Youyi Road, Hexi District, Tianjin, China  
Tel: +86-22-2813-1015 / Fax: +86-22-2813-1017

#### ④ Guangzhou FA Center

**MITSUBISHI ELECTRIC AUTOMATION (CHINA) LTD. Guangzhou FA Center**

Room 1609, North Tower, The Hub Center, No.1068, Xingang East Road, Haizhu District, Guangzhou, China  
Tel: +86-20-8923-6730 / Fax: +86-20-8923-6715

### Taiwan

#### ⑤ Taichung FA Center

**MITSUBISHI ELECTRIC TAIWAN CO.,LTD.**

No.8-1, Industrial 16th Road, Taichung Industrial Park, Taichung City 40768 Taiwan  
Tel: +886-4-2359-0688 / Fax: +886-4-2359-0689

### Korea

#### ⑥ Korea FA Center

**MITSUBISHI ELECTRIC AUTOMATION KOREA CO., LTD.**

7F~9F, Gangseo Hangang Xi-tower A, 401, Yangcheon-ro, Gangseo-Gu, Seoul 07528, Korea  
Tel: +82-2-3660-9632 / Fax: +82-2-3664-0475

### Thailand

#### ⑦ Thailand FA Center

**MITSUBISHI ELECTRIC FACTORY AUTOMATION (THAILAND) CO., LTD.**

12th Floor, SV.City Building, Office Tower 1, No. 896/19 and 20 Rama 3 Road, Kwaeng Bangpongpan, Khet Yannawa, Bangkok 10120, Thailand  
Tel: +66-2682-6522-31 / Fax: +66-2682-6020

### ASEAN

#### ⑧ ASEAN FA Center

**MITSUBISHI ELECTRIC ASIA PTE. LTD.**

307 Alexandra Road, Mitsubishi Electric Building, Singapore 159943  
Tel: +65-6470-2480 / Fax: +65-6476-7439

### Indonesia

#### ⑨ Indonesia FA Center

**PT. MITSUBISHI ELECTRIC INDONESIA Cikarang Office**

Jl. Kenari Raya Blok G2-07A Delta Silicon 5, Lippo Cikarang - Bekasi 17550, Indonesia  
Tel: +62-21-2961-7797 / Fax: +62-21-2961-7794

### Vietnam

#### ⑩ Hanoi FA Center

**MITSUBISHI ELECTRIC VIETNAM COMPANY LIMITED Hanoi Branch Office**

6th Floor, Detech Tower, 8 Ton That Thuyet Street, My Dinh2 Ward, Nam Tu Liem District, Hanoi, Vietnam  
Tel: +84-4-3937-8075 / Fax: +84-4-3937-8076

#### ⑪ Ho Chi Minh FA Center

**MITSUBISHI ELECTRIC VIETNAM COMPANY LIMITED**

Unit 01-04, 10th Floor, Vincom Center, 72 Le Thanh Ton Street, District 1, Ho Chi Minh City, Vietnam  
Tel: +84-8-3910-5945 / Fax: +84-8-3910-5947

### India

#### ⑫ India Pune FA Center

**MITSUBISHI ELECTRIC INDIA PVT. LTD. Pune Branch**

Emerald House, EL-3, J Block, M.I.D.C., Bhosari, Pune - 411026, Maharashtra, India  
Tel: +91-20-2710-2000 / Fax: +91-20-2710-2100

#### ⑬ India Gurgaon FA Center

**MITSUBISHI ELECTRIC INDIA PVT. LTD.**

**Gurgaon Head Office**

2nd Floor, Tower A & B, Cyber Greens, DLF Cyber City, DLF Phase-III, Gurgaon-122002, Haryana, India  
Tel: +91-124-463-0300 / Fax: +91-124-463-0399

#### ⑭ India Bangalore FA Center

**MITSUBISHI ELECTRIC INDIA PVT. LTD. Bangalore Branch**

Prestige Emerald, 6th Floor, Municipal No.2, Madras Bank Road, Bangalore - 560001, Karnataka, India  
Tel: +91-80-4020-1600 / Fax: +91-80-4020-1699

#### ⑮ India Chennai FA Center

**MITSUBISHI ELECTRIC INDIA PVT. LTD. Chennai Branch**

Citilights Corporate Centre No. 1, Vivekananda Road, Srinivasa Nagar, Chetpet, Chennai - 600031, Tamil Nadu, India  
Tel: +91-4445548772 / Fax: +91-4445548773

#### ⑯ India Ahmedabad FA Center

**MITSUBISHI ELECTRIC INDIA PVT. LTD. Ahmedabad Branch**

B/4, 3rd Floor, SAFAL Profitaire, Corporate Road, Prahaladnagar, Satellite, Ahmedabad - 380015, Gujarat, India  
Tel: +91-7965120063

### America

#### ⑰ North America FA Center

**MITSUBISHI ELECTRIC AUTOMATION, INC.**

500 Corporate Woods Parkway, Vernon Hills, IL 60061, U.S.A.  
Tel: +1-847-478-2469 / Fax: +1-847-478-2253

### Mexico

#### ⑱ Mexico FA Center

**MITSUBISHI ELECTRIC AUTOMATION, INC. Mexico Branch**

Mariano Escobedo #69, Col.Zona Industrial, Tlalnepantla Edo. Mexico, C.P.54030  
Tel: +52-55-3067-7511

### Brazil

#### ⑲ Brazil FA Center

**MITSUBISHI ELECTRIC DO BRASIL COMÉRCIO E SERVIÇOS LTDA.**

Avenida Adelino Cardana, 293, 21 andar, Bethaville, Barueri SP, Brazil  
Tel: +55-11-4689-3000 / Fax: +55-11-4689-3016

### Europe

#### ⑳ Europe FA Center

**MITSUBISHI ELECTRIC EUROPE B.V. Polish Branch**

ul. Krakowska 50, 32-083 Balice, Poland  
Tel: +48-12-347-65-81 / Fax: +48-12-630-47-01

#### ㉑ Germany FA Center

**MITSUBISHI ELECTRIC EUROPE B.V. German Branch**

Mitsubishi-Electric-Platz 1, 40882 Ratingen, Germany  
Tel: +49-2102-486-0 / Fax: +49-2102-486-1120

#### ㉒ UK FA Center

**MITSUBISHI ELECTRIC EUROPE B.V. UK Branch**

Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, U.K.  
Tel: +44-1707-27-8780 / Fax: +44-1707-27-8695

#### ㉓ Czech Republic FA Center

**MITSUBISHI ELECTRIC EUROPE B.V. Czech Branch**

Avenir Business Park, Radlicka 751/113e, 158 00 Praha 5, Czech Republic  
Tel: +420-251-551-470 / Fax: +420-251-551-471

#### ㉔ Russia FA Center

**MITSUBISHI ELECTRIC (RUSSIA) LLC ST. Petersburg Branch**

Piskarevsky pr. 2, bld 2, lit "Sch", BC "Benuea", office 720; 195027, St. Petersburg, Russia  
Tel: +7-812-633-3497 / Fax: +7-812-633-3499

#### ㉕ Turkey FA Center

**MITSUBISHI ELECTRIC TURKEY A.Ş. Ümraniye Branch**

Serifali Mahallesi Nutuk Sokak No:5, TR-34775 Ümraniye / Istanbul, Turkey  
Tel: +90-216-526-3990 / Fax: +90-216-526-3995

# Factory Automation Global website

Mitsubishi Electric Factory Automation provides a mix of services to support its customers worldwide. A consolidated global website is the main portal, offering a selection of support tools and a window to its local Mitsubishi Electric sales and support network.

## ■ From here you can find:

- Overview of available factory automation products
- Library of downloadable literature
- Support tools such as online e-learning courses, terminology dictionary, etc.
- Global sales and service network portal
- Latest news related to Mitsubishi Electric factory automation

---

**Mitsubishi Electric Factory Automation  
Global website:**  
**[www.MitsubishiElectric.com/fa](http://www.MitsubishiElectric.com/fa)**

---



## Online e-learning

An extensive library of e-learning courses covering the factory automation product range has been prepared. Courses from beginner to advanced levels of difficulty are available in various languages.



### ■ Beginner level

Designed for newcomers to Mitsubishi Electric Factory Automation products gaining a background of the fundamentals and an overview of various products related to the course.

### ■ Basic to Advanced levels

These courses are designed to provide education at all levels. Various different features are explained with application examples providing an easy and informative resource for in-house company training.

# Innovative next-generation, e-Manual

The e-Manual viewer is a next-generation digital manual offered by Mitsubishi Electric that consolidates all manuals into an easy-to-use package with various useful features integrated into the viewer. The e-Manual is modeled around a centralized database allowing multiple manuals to be cross-searched at once, further reducing the time for reading individual product manuals when setting up a control system.



## ■ Key features include

- One-stop database containing all required manuals, with local file cache
- Included with GX Works3 engineering software
- Also available in tablet version
- Easily download manuals all at once
- Automatic update of manual versions
- Search information across multiple manuals
- Visual navigation from hardware diagram showing various specifications
- Customizable by adding user notes and bookmarks
- Directly port sample programs within manuals to GX Works3

## ■ MITSUBISHI ELECTRIC FA e-Manual (tablet version)



The e-Manual application is available on iOS and Android™ tablets. e-Manual files are provided as in-app downloads.



**iOS**  
Version 8.1 or later

Download on the  
**App Store**





**Android™**  
Version 4.3/4.4/5.0

ANDROID APP ON  
**Google play**



## ■ Supported versions

| OS       | OS version           | Model  |
|----------|----------------------|--|
| iOS      | iOS 8.1 or later     | Apple iPad 2, iPad (3rd generation), iPad (4th generation), iPad Air, iPad Air 2, iPad mini, iPad mini 2, iPad mini 3, iPad mini 4 |
| Android™ | Android™ 4.3/4.4/5.0 | ASUS Nexus7™ (2013)*1  |

\*1: When using a tablet not listed above, 7-inch (resolution of 1920x1200 dots (WUXGA)) or better is recommended.

# Product List

Please check the compatibility and restrictions of the product in the related manual before purchasing.

[ Legend ] **DB** : Double brand product <sup>(Note)</sup> **NEW** : Recently released product **SOON** : Product available soon

## MELSEC-L series

| Type         | Model          | Outline  |
|--------------|----------------|--|
| CPU          | L02SCPU        | Number of I/O points: 1024 points, Number of I/O device points: 8192 points, Program capacity: 20K steps, Basic operation processing speed (LD instruction): 60 ns, Program memory capacity: 80 KB, Peripheral connection ports: USB and RS-232 (Predefined protocol support function), Memory card I/F: None, Built-in I/O functions (General-purpose input: 16 points, General purpose output (Sink type): 8 points, Interrupt input, Pulse catch, Positioning, High-speed counter), END cover included  |
|              | L02SCPU-P      | Number of I/O points: 1024 points, Number of I/O device points: 8192 points, Program capacity: 20K steps, Basic operation processing speed (LD instruction): 60 ns, Program memory capacity: 80 KB, Peripheral connection ports: USB and RS-232 (Predefined protocol support function), Memory card I/F: None, Built-in I/O functions (General-purpose input: 16 points, General-purpose output (Source type): 8 points, Interrupt input, Pulse catch, Positioning, High-speed counter), END cover included  |
|              | L02CPU         | Number of I/O points: 1024 points, Number of I/O device points: 8192 points, Program capacity: 20K steps, Basic operation processing speed (LD instruction): 40 ns, Program memory capacity: 80 KB, Peripheral connection ports: USB and Ethernet (Predefined protocol support function), Memory card I/F: SD Memory Card, Built-in I/O functions (General-purpose input: 16 points, General-purpose output (Sink type): 8 points, Interrupt input, Pulse catch, Positioning, High-speed counter), END cover included  |
|              | L02CPU-P       | Number of I/O points: 1024 points, Number of I/O device points: 8192 points, Program capacity: 20K steps, Basic operation processing speed (LD instruction): 40 ns, Program memory capacity: 80 KB, Peripheral connection ports: USB and Ethernet (Predefined protocol support function), Memory card I/F: SD Memory Card, Built-in I/O functions (General-purpose input: 16 points, General-purpose output (Sink type): 8 points, Interrupt input, Pulse catch, Positioning, High-speed counter), END cover included  |
|              | L06CPU         | Number of I/O points: 4096 points, Number of I/O device points: 8192 points, Program capacity: 60K steps, Basic operation processing speed (LD instruction): 9.5 ns, Program memory capacity: 240 KB, Peripheral connection ports: USB and Ethernet (Predefined protocol support function), Memory card I/F: SD Memory Card, Built-in I/O functions (General-purpose input: 16 points, General-purpose output (Sink type): 8 points, Interrupt input, Pulse catch, Positioning, High-speed counter), END cover included  |
|              | L06CPU-P       | Number of I/O points: 4096 points, Number of I/O device points: 8192 points, Program capacity: 60K steps, Basic operation processing speed (LD instruction): 9.5 ns, Program memory capacity: 240 KB, Peripheral connection ports: USB and Ethernet (Predefined protocol support function), Memory card I/F: SD Memory Card, Built-in I/O functions (General-purpose input: 16 points, General-purpose output (Sink type): 8 points, Interrupt input, Pulse catch, Positioning, High-speed counter), END cover included  |
|              | L26CPU         | Number of I/O points: 4096 points, Number of I/O device points: 8192 points, Program capacity: 260K steps, Basic operation processing speed (LD instruction): 9.5 ns, Program memory capacity: 1040 KB, Peripheral connection ports: USB and Ethernet (Predefined protocol support function), Memory card I/F: SD Memory Card, Built-in I/O functions (General-purpose input: 16 points, General-purpose output (Sink type): 8 points, Interrupt input, Pulse catch, Positioning, High-speed counter), END cover included  |
|              | L26CPU-P       | Number of I/O points: 4096 points, Number of I/O device points: 8192 points, Program capacity: 260K steps, Basic operation processing speed (LD instruction): 9.5 ns, Program memory capacity: 1040 KB, Peripheral connection ports: USB and Ethernet (Predefined protocol support function), Memory card I/F: SD Memory Card, Built-in I/O functions (General-purpose input: 16 points, General-purpose output (Source type): 8 points, Interrupt input, Pulse catch, Positioning, High-speed counter), END cover included  |
|              | L26CPU-BT      | Number of I/O points: 4096 points, Number of I/O device points: 8192 points, Program capacity: 260K steps, Basic operation processing speed (LD instruction): 9.5 ns, Program memory capacity: 1040 KB, Peripheral connection ports: USB and Ethernet (Predefined protocol support function), Memory card I/F: SD Memory Card, Built-in I/O functions (General-purpose input: 16 points, General-purpose output (Sink type): 8 points, Interrupt input, Pulse catch, Positioning, High-speed counter), CC-Link master/local station function, END cover included   |
|              | L26CPU-PBT     | Number of I/O points: 4096 points, Number of I/O device points: 8192 points, Program capacity: 260K steps, Basic operation processing speed (LD instruction): 9.5 ns, Program memory capacity: 1040 KB, Peripheral connection ports: USB and Ethernet (Predefined protocol support function), Memory card I/F: SD Memory Card, Built-in I/O functions (General-purpose input: 16 points, General-purpose output (Source type): 8 points, Interrupt input, Pulse catch, Positioning, High-speed counter), CC-Link master/local station function, END cover included |
| CPU packages | L02CPU-SET     | CPU module (L02CPU), Display unit (L6DSPU), and Power supply module (L61P) set   |
|              | L02CPU-P-SET   | CPU module (L02CPU-P), Display unit (L6DSPU), and Power supply module (L61P) set   |
|              | L06CPU-SET     | CPU module (L06CPU), Display unit (L6DSPU), and Power supply module (L61P) set   |
|              | L06CPU-P-SET   | CPU module (L06CPU-P), Display unit (L6DSPU), and Power supply module (L61P) set   |
|              | L26CPU-SET     | CPU module (L26CPU), Display unit (L6DSPU), and Power supply module (L61P) set   |
|              | L26CPU-P-SET   | CPU module (L26CPU-P), Display unit (L6DSPU), and Power supply module (L61P) set   |
|              | L26CPU-BT-SET  | CPU module (L26CPU-BT), Display unit (L6DSPU), and Power supply module (L61P) set  |
|              | L26CPU-PBT-SET | CPU module (L26CPU-PBT), Display unit (L6DSPU), and Power supply module (L61P) set   |

Note: General specifications and product guarantee conditions of jointly developed products are different from those of MELSEC products.  
For more information, please refer to the product manuals or contact your local Mitsubishi representative for details.

## MELSEC-L series

| Type                          |                        |                     | Model   | Outline  |  |
|-------------------------------|------------------------|---------------------|---|--|--|
| CPU options                   | Display unit           |                     | L6DSPU  | STN black-and-white LCD, 16 characters x4 lines  |  |
|                               | Battery                |                     | Q6BAT   | Replacement battery  |  |
|                               |                        |                     | Q7BAT-SET   | High capacity battery with a battery holder for CPU installation   |  |
|                               |                        |                     | Q7BAT   | High capacity replacement battery  |  |
|                               | SD Memory Card         |                     | NZ1MEM-2GBSD*1  | SD memory card, capacity: 2 GB   |  |
|                               |                        |                     | NZ1MEM-4GBSD*1  | SDHC memory card, capacity: 4 GB   |  |
|                               |                        |                     | NZ1MEM-8GBSD*1  | SDHC memory card, capacity: 8 GB   |  |
|                               |                        |                     | NZ1MEM-16GBSD*1   | SDHC memory card, capacity: 16 GB  |  |
| RS-232 adapter                |                        | L6ADP-R2            | For GOT(HMI) connection, 1 x RS-232 channel, maximum transmission speed: 115.2Kpbs, MELSOFT connectable<br>MODBUS® RTU master function (using predefined protocol support function) |  |  |
| RS-422/485 adapter            |                        | L6ADP-R4            | For GOT(HMI) connection, 1 x RS-422/485 channel, maximum transmission speed: 115.2Kpbs<br>MODBUS® RTU master function (using predefined protocol support function)                  |  |  |
| END cover with error terminal |                        |                     | L6EC-ET   | END cover with error terminal  |  |
| Power supply                  |                        |                     | L61P  | Input voltage: 100...240 V AC, Output voltage: 5 V DC, Output current: 5 A   |  |
|                               |                        |                     | L63P  | Input voltage: 24 V DC, Output voltage: 5 V DC, Output current: 5 A  |  |
|                               | Slim type Power supply |                     | L63SP   | Input voltage: 24 V DC, Output voltage: 5 V DC, Output current: 5 A, No isolation  |  |
| Branch / Extension module     |                        |                     | L6EXB   | Branch module  |  |
|                               |                        |                     | L6EXE   | Extension module with END cover  |  |
| Extension cable               |                        |                     | LC06E   | 0.6-m cable for connecting branch and extension modules  |  |
|                               |                        |                     | LC10E   | 1.0-m cable for connecting branch and extension modules  |  |
|                               |                        |                     | LC30E   | 3.0-m cable for connecting branch and extension modules  |  |
|                               |                        |                     |   |  |  |
| I/O module                    | Input                  | AC input            | LX10  | 16 points, 100...120 V AC, Response time: 20 ms or less, 16 points/common, 18-point terminal block   |  |
|                               |                        |                     | LX28  | 8 points, 100...240 V AC, Response time: 20 ms or less, 8 points/common, 18-point terminal block   |  |
|                               |                        | DC input            | LX40C6  | 16 points, 24 V DC, Response time: 1/5/10/20/70 ms or less, 16 points/common, Positive/Negative common, 18-point terminal block  |  |
|                               |                        |                     | LX41C4  | 32 points, 24 V DC, Response time: 1/5/10/20/70 ms or less, 32 points/common, Positive/Negative common, 40-pin connector   |  |
|                               |                        |                     | LX42C4  | 64 points, 24 V DC, Response time: 1/5/10/20/70 ms or less, 32 points/common, Positive/Negative common, 40-pin connector x2  |  |
|                               | Output                 | Relay               | LY10R2  | 16 points, 24 V DC/240 V AC, 2 A/point, 8 A/common, Response time: 12 ms or less, 16 points/common, 18-point terminal block  |  |
|                               |                        |                     | LY18R2A   | 8 points, 24 V DC/240 V AC, 2 A/point, 8 A/module, Response time: 12 ms or less, No common (all points independent), 18-point terminal block   |  |
|                               |                        | Triac               | LY20S6  | 16 points, 100...240 V AC, 0.6 A/point, 4.8 A/common, Response time: 1 ms + 0.5 cycles or less, 16 points/common, 18-point terminal block  |  |
|                               |                        |                     | LY28S1A   | 8 points, 100...240 V DC, 1 A/point, 8 A/module, Response time: 1 ms + 0.5 cycles or less, No common (all points independent), 18-point terminal block   |  |
|                               |                        | Transistor (Sink)   | LY40NT5P  | 16 points, 12...24 V DC, 0.5 A/point, 5 A/common, Response time: 1 ms or less, 16 points/common, 18-point terminal block, overload protection function, overheat protection function, surge suppression        |  |
|                               |                        |                     | LY41NT1P  | 32 points, 12...24 V DC, 0.1 A/point, 2 A/common, Response time: 1 ms or less, 32 points/common, Sink type, 40-pin connector, overload protection function, overheat protection function, surge suppression    |  |
|                               |                        |                     | LY42NT1P  | 64 points, 12...24 V DC, 0.1 A/point, 2 A/common, Response time: 1 ms or less, 32 points/common, Sink type, 40-pin connector x2, overload protection function, overheat protection function, surge suppression |  |
|                               |                        | Transistor (Source) | LY40PT5P  | 16 points, 12...24 V DC, 0.5 A/point, 5 A/common, Response time: 1 ms or less, 16 points/common, 18-point terminal block, overload protection function, overheat protection function, surge suppression        |  |
|                               |                        |                     | LY41PT1P  | 32 points, 12...24 V DC, 0.1 A/point, 2 A/common, Response time: 1 ms or less, 32 points/common, 40-pin connector, overload protection function, overheat protection function, surge suppression               |  |
|                               |                        |                     | LY42PT1P  | 64 points, 12...24 V DC, 0.1 A/point, 2 A/common, Response time: 1 ms or less, 32 points/common, 40-pin connector x2, overload protection function, overheat protection function, surge suppression            |  |
|                               |                        | I/O combined        | DC input/transistor output (sink)   | LH42C4NT1P   | Input specifications : 32 points, 24 V DC, Response time: 1/5/10/20/70 ms or less, 32 points/common, Positive/Negative common<br>Output specifications : 32 points, 12...24 V DC, 0.1 A/point, 2 A/common, Response time: 1 ms or less, 32 points/common, overload protection function, overheat protection function, surge suppression<br>40-pin connector x2 |
|                               |                        |                     | DC input/transistor output (source)   | LH42C4PT1P   | Input specifications : 32 points, 24 V DC, Response time: 1/5/10/20/70 ms or less, 32 points/common, Positive/Negative common<br>Output specifications : 32 points, 12...24 V DC, 0.1 A/point, 2 A/common, Response time: 1 ms or less, 32 points/common, overload protection function, overheat protection function, surge suppression<br>40-pin connector x2 |
| Space module                  |                        |                     | LG69  | Space module for AnS module replacement  |  |
| Spring clamp terminal block   |                        |                     | L6TE-18S  | Alternative to a 18-point screw terminal block, 0.3...1.0 mm <sup>2</sup> (AWG22...18), push-in type   |  |

\*1: Mitsubishi Electric does not guarantee the operation of non-Mitsubishi Electric products.



## MELSEC-L series

| Type   |                     | Model               | Outline  |
|--|---------------------|---------------------|--|
| Multiple input (voltage/current/temperature) modules |                     | L60MD4-G            | 4 channels, Input: -10...10 V DC, 0...20 mA DC, micro voltage-100...100 mV DC, Thermocouple (K, J, T, E, N, R, S, B, U, L, PL II, W5Re/W26Re), RTD (Pt1000, Pt100, JPt100, Pt50), Output (resolution): 0...20000, -20000...20000, (with voltage, current, micro voltage input) Conversion speed: 50 ms/channels, 18-point terminal block, Channel isolated |
| Analog I/O module                                    | Analog input        | L60AD4              | 4 channels, Input: -10...10 V DC, 0...20 mA DC, Output (resolution): 0...20000, -20000...20000, Conversion speed: 20 μs, 80 μs, 1 ms/channel, 18-point terminal block  |
|  |                     | L60ADVL8            | 8 channels, Input: -10...10 V, Output (resolution)-16000...16000, Conversion speed: 1 ms/channels 18-point terminal block  |
|  |                     | L60ADIL8            | 8 channels, Input: 0...20 mA DC, Output (resolution): 0...8000, Conversion speed: 1 ms/channels 18-point terminal block  |
|  |                     | L60AD4-2GH          | 4 channels, Input: -10...10 V DC, 0...20 mA DC, Output (resolution): 0...32000, -32000...32000, Conversion speed: 40 μs/2 channels, 18-point terminal block, Dual channel isolation  |
|  | Analog output       | L60DA4              | 4 channels, Input (resolution): 0...20000, -20000...20000, Output: -10...10 V DC, 0...20 mA DC, Conversion speed: 20 μs/channel, 18-point terminal block   |
|  |                     | L60DAVL8 <b>NEW</b> | 8 channels, Input (resolution): -16000...16000, Output: -10...10 V DC, Conversion speed: 200 μs/channel, 18-point terminal block   |
|  |                     | L60DAIL8 <b>NEW</b> | 8 channels, Input (resolution): 0...8000, Output: 0...20 mA DC, Conversion speed: 200 μs/channel, 18-point terminal block  |
|  | Analog I/O          | L60AD2DA2           | Input specifications : 2 channels, Input: -10...10 V DC, 0...20 mA DC, Output (resolution): 0...12000, -16000...16000, Conversion speed: 80 μs/channel, Output specifications : 2 channels, Input (resolution): 0...12000, -16000...16000, Output: -10...10 V DC, 0...20 mA DC, Conversion speed: 80 μs/channel, 18-point terminal block                   |
| Temperature input module                             | RTD input           | L60RD8              | 8 channels, RTD (Pt1000, Pt100, JPt100, Pt50, Ni500, Ni120, Ni100, Cu100, Cu50) Resolution: 0.1°C, Conversion speed: 40 ms/ch, 24-point spring clamp terminal block  |
| Temperature control module                           | Thermocouple input  | L60TCTT4            | 4 channels (normal mode) /2 channels (heating-cooling control), Thermocouple (K, J, T, B, S, E, R, N, U, L, PL II, W5Re/W26Re), No Heater disconnection detection function, sampling cycle: 250 ms/4 channels, 500 ms/4 channels, Channel isolated, 18 point terminal block  |
|  |                     | L60TCTT4BW          | 4 channels (normal mode) /2 channels (heating-cooling control), Thermocouple (K, J, T, B, S, E, R, N, U, L, PL II, W5Re/W26Re), Heater disconnection detection function, Sampling cycle: 250 ms/4 channels, 500 ms/4 channels, Channel isolated, 18 point terminal block x2  |
|  | RTD input           | L60TCRT4            | 4 channels (normal mode) /2 channels (heating-cooling control), Platinum type resistive temperature device(Pt100, JPt100), No Heater disconnection detection function, Sampling cycle: 250 ms/4 channels, 500 ms/4 channels, Channel isolated, 18 point terminal block   |
|  |                     | L60TCRT4BW          | 4 channels (normal mode) /2 channels (heating-cooling control), Platinum type resistive temperature device (Pt100, JPt100), Heater disconnection detection function, Sampling cycle: 250 ms/4 channels, 500 ms/4 channels, Channel isolated, 18 point terminal block x2  |
| Simple motion module                                 | SSCNET Ⅲ/H          | LD77MS2*1           | 2 axes, 2-axis linear interpolation, 2-axis circular interpolation, synchronous control, Control unit: mm, inch, degree, pulse, Number of positioning data: 600 data/axis, SSCNET Ⅲ/H connectivity   |
|  |                     | LD77MS4*1           | 4 axes, 2-/3-/4-axis linear interpolation, 2-axis circular interpolation, synchronous control, Control unit: mm, inch, degree, pulse, Number of positioning data: 600 data/axis, SSCNET Ⅲ/H connectivity   |
|  |                     | LD77MS16*1          | 16 axes, 2-/3-/4-axis linear interpolation, 2-axis circular interpolation, synchronous control, Control unit: mm, inch, degree, pulse, Number of positioning data: 600 data/axis, SSCNET Ⅲ/H connectivity  |
| Positioning module                                   | Open collector      | LD75P1              | 1 axis, Control unit: mm, inch, degree, pulse, Number of positioning data: 600 data/axis, Maximum output pulse: 200 kpps, 40-pin connector   |
|  |                     | LD75P2              | 2 axes, 2-axis linear interpolation, 2-axis circular interpolation, Control unit: mm, inch, degree, pulse, Number of positioning data: 600 data/axis, Maximum output pulse: 200 kpps, 40-pin connector   |
|  |                     | LD75P4              | 4 axes, 2-/3-/4-axis linear interpolation, 2-axis circular interpolation, 3-axis helical interpolation, Control unit: mm, inch, degree, pulse, Number of positioning data: 600 data/axis, Maximum output pulse: 200 kpps, 40-pin connector x2  |
|  | Differential driver | LD75D1              | 1 axis, Control unit: mm, inch, degree, pulse, Number of positioning data: 600 data/axis, Maximum output pulse: 4 Mpps, 40-pin connector   |
|  |                     | LD75D2              | 2 axes, 2-axis linear interpolation, 2-axis circular interpolation, Control unit: mm, inch, degree, pulse, Number of positioning data: 600 data/axis, Maximum output pulse: 4 Mpps, 40-pin connector   |
|  |                     | LD75D4              | 4 axes, 2-/3-/4-axis linear interpolation, 2-axis circular interpolation, 3-axis helical interpolation, Control unit: mm, inch, degree, pulse, Number of positioning data: 600 data/axis, Maximum output pulse: 4 Mpps, 40-pin connector x2  |
| Flexible high-speed I/O control module               |                     | LD40PD01            | 12 input points (all for 5 V DC/24 V DC/differential)<br>14 output points (8 points for DC (5 V DC...24 V), 6 points for differential)   |
| High-speed counter module                            |                     | LD62                | 2 channels, 200/100/10 kpps, Count input signal: 5/12/24 V DC, External input: 5/12/24 V DC, Coincidence output: transistor (sink), 12/24 V DC, 0.5 A/point, 2 A/common, 40-pin connector  |
|  |                     | LD62D               | 2 channels, 500/200/100/10 kpps, Count input signal: EIA standards RS-422-A (Differential line driver level), External input: 5/12/24 V DC, Coincidence output: transistor (sink), 12/24 V DC, 0.5 A/point, 2 A/common, 40-pin connector   |

\*1: The connector is not appended. Please obtain an LD77MHIOCON separately.



## MELSEC-L series

|                | Type                     | Model                      | Outline  |
|----------------|--------------------------|----------------------------|--|
| Network module | CC-Link IE Field Network | LJ71GF11-T2                | Master/Local station   |
|                |                          | LJ72GF15-T2*1              | Remote station (Head module with END cover)  |
|                | CC-Link                  | LJ61BT11                   | Master/Local station, CC-Link Ver.2.0 compatible   |
|                | CC-Link/LT               | LJ61CL12                   | Master station, CC-Link/LT system compatible   |
|                | AnyWireASLINK            | LJ51AW12AL <span>DB</span> | AnyWireASLINK system compatible master module  |
|                | SSCNET III/H             | LJ72MS15*2                 | Remote station (Head module with END cover)  |
|                | Ethernet interface       | LJ71E71-100                | 10BASE-T/100BASE-TX<br>BACnet™ client function, MODBUS® TCP master function (using predefined protocol support function)   |
|                | Serial communication     | LJ71C24                    | RS-232: 1 channel, RS-422/485: 1 channel, Total transmission speed of 2 channels: 230.4 kbps<br>MODBUS® RTU master function (using predefined protocol support function) |
|                |                          | LJ71C24-R2                 | RS-232: 2 channels, Total transmission speed of 2 channels: 230.4 kbps<br>MODBUS® RTU master function (using predefined protocol support function)                       |

\*1: The CPU module, branch and extension module, display unit, RS-232 adapter, CC-Link IE Field Network master/local module and Ethernet interface module cannot be mounted on a system using LJ72GF-T2.

\*2: The CPU module, branch and extension module, display unit, RS-232 adapter, temperature control module, simple motion module, positioning module, CC-Link IE Field Network master/local module, CC-Link IE Field network head module, CC-Link master/local module, CC-Link/LT master module, AnyWireASLINK master module, Ethernet interface module, and serial communication module cannot be mounted on a system using LJ72MS15.

## Compatible module for each protocol

| Compatible protocol   | Compatible module            | Model  | Outline   |
|-----------------------|------------------------------|--|---|
| SLMP<br>(MC protocol) | CPU (Built-in Ethernet)      | L02CPU(-P)<br>L06CPU(-P)<br>L26CPU(-P)<br>L26CPU(-P)BT | SLMP server function (only MC protocol QnA compatible 3E frame)<br>SLMP client function (using predefined protocol support function)                  |
|                       | Ethernet interface module    | LJ71E71-100  | SLMP server function (including MC protocol)<br>SLMP client function (using predefined protocol support function)                                     |
| BACnet™               | CPU (Built-in Ethernet)      | L02CPU(-P)<br>L06CPU(-P)<br>L26CPU(-P)<br>L26CPU(-P)BT | Compatible BACnet™ object: Analog Input (AI), Binary Input (BI), Binary Output (BO), Accumulator (AC)<br>(using predefined protocol support function) |
|                       | Ethernet interface module    | LJ71E71-100  |   |
| MODBUS®/TCP           | CPU (Built-in Ethernet)      | L02CPU(-P)<br>L06CPU(-P)<br>L26CPU(-P)<br>L26CPU(-P)BT | MODBUS®/TCP communication master function<br>(using predefined protocol support function)   |
|                       | Ethernet interface module    | LJ71E71-100  |   |
| MODBUS®               | CPU (Built-in RS-232)        | L02SCPU(-P)  |   |
|                       | RS-232 adapter               | L6ADP-R2   | MODBUS®RTU communication master function<br>(using predefined protocol support function)  |
|                       | RS-422/485 adapter           | L6ADP-R4   |   |
|                       | Serial Communication Modules | LJ71C24(-R2)   |   |

## Options

|   | Type | Model          | Outline  |
|---|------|----------------|--|
| Connector                                 |      | A6CON1*3*4     | Soldering type 32-point connector (40-pin connector)                                   |
|   |      | A6CON2*3*4     | Crimp contact type 32-point connector (40-pin connector)                               |
|   |      | A6CON3*3*5     | Flat cable pressure welding type 32-point connector (40-pin connector)                 |
|   |      | A6CON4*3*4     | Soldering type 32-point connector (40-pin connector, cable connectable in bidirection) |
| Connector/terminal block converter module |      | A6TBXY36*6*7*8 | For positive common type input module and sink type output module (Standard type)      |
|   |      | A6TBXY54*6*7*8 | For positive common type input module and sink type output module (2-wire type)        |
|   |      | A6TBX70*6*9    | For positive common type input module (3-wire type)                                    |

\*3: Available for the L Series CPU, LX41C4, LX42C4, LY41NT1P, LY42NT1P, LY41PT1P, LY42PT1P, LH42C4NT1P, and LH42C4PT1P.

\*4: Available for LD75P1, LD75P2, LD75P4, LD75D1, LD75D2, LD75D4, LD40PD01, LD62 and LD62D.

\*5: Available for the L Series CPU when using all the I/O signals for normal I/O output functions.

\*6: Available for LX41C4 and LX42C4. (Positive common only)

\*7: Available for LY41NT1P, LY42NT1P, LY41PT1P and LY42PT1P.

\*8: Available for LH42C4NT1P and LH42C4PT1P. (Input side only when using plus common.)

\*9: Available for LH42C4NT1P and LH42C4PT1P. (Input side only when using plus common. Output side is not usable.)

## Ethernet related products

|                          | Type   | Model  | Outline  |
|--------------------------|--------|--|--|
| Wireless LAN Adapter     | U.S.A. | NZ2WL-US*10*11 <span>DB</span>                 | Conforms to IEEE 802.11a, IEEE 802.11b, IEEE 802.11g standards   |
|                          | Europe | NZ2WL-EU*10*11 <span>DB</span>                 | Conforms to IEEE 802.11a, IEEE 802.11b, IEEE 802.11g standards   |
|                          | China  | NZ2WL-CN*10*11 <span>DB</span>                 | Conforms to IEEE 802.11a, IEEE 802.11b, IEEE 802.11g standards   |
|                          | Korea  | NZ2WL-KR*10*11 <span>DB</span>                 | Conforms to IEEE 802.11a, IEEE 802.11b, IEEE 802.11g standards   |
|                          | Taiwan | NZ2WL-TW*10*11 <span>DB</span>                 | Conforms to IEEE 802.11a, IEEE 802.11b, IEEE 802.11g standards   |
| Industrial switching HUB |        | NZ2EHG-T8N<br><span>DB</span> <span>NEW</span> | 10 Mbps/100 Mbps/1 Gbps AUTO-MDIX, DIN rail mountable, 8 ports   |
|                          |        | NZ2EHF-T8 <span>DB</span>                      | 10 Mbps/100 Mbps AUTO-MDIX, DIN rail mountable, 8 ports  |
| Intelligent HUB          |        | NZ2MHG-T8F2 <span>NEW</span>                   | 10 Mbps/100 Mbps/1 Gbps DIN rail mountable, 8 ports (2 ports support optical fiber cable), CC-Link IE and Ethernet devices are connectable, ERP- and LA- style topologies, VLAN and SNMP are supported |

\*10: Each product is usable only in the respective country.

\*11: Both access points and stations are supported, and can be switched with the settings.

»For details on the software versions compatible with each module, refer to the manual for each product.

Please contact your local Mitsubishi Electric sales office or representative for the latest information about MELSOFT software versions and compatible operating systems.

## MELSOFT — Programming Tool

| Type                                  | Model             | Outline  |
|---------------------------------------|-------------------|--|
| MELSOFT iQ Works                      | SW2DND-IQWK-E     | FA engineering software*1<br><ul style="list-style-type: none"> <li>• System Management Software: MELSOFT Navigator</li> <li>• Controller Programming Software: MELSOFT GX Works3*2, GX Works2, GX Developer</li> <li>• Motion Programming Software: MELSOFT MT Works2</li> <li>• HMI Programming Software: MELSOFT GT Works3</li> <li>• Robot Programming Software: MELSOFT RT ToolBox2 mini</li> <li>• Inverter Setup Software: MELSOFT FR Configurator2</li> <li>• C Controller setting and monitoring tool: MELSOFT CW Configurator</li> <li>• MITSUBISHI ELECTRIC FA Library</li> </ul> |
| MELSOFT GX Works3                     | SW1DND-GXW3-E     | Controller Programming Software: MELSOFT GX Works3*2<br>MITSUBISHI ELECTRIC FA Library<br>Comes with GX Works2 and GX Developer  |
| MELSOFT GX Works2                     | SW1DNC-GXW2-E     | Controller Programming Software<br>Comes with GX Developer   |
| MELSOFT MX Component                  | SW4DNC-ACT-E      | ActiveX® library for communication   |
| MELSOFT MX Sheet                      | SW2DNC-SHEET-E*3  | Excel® communication support tool  |
| MELSOFT MX Works                      | SW2DNC-SHEETSET-E | A set of two products: MELSOFT MX Component, MELSOFT MX Sheet  |
| MELSOFT MX Component for iOS/Android™ | SW1DNC-ACTAND-B   | Library for communication (for Android application development) (Japanese/English version)   |
|                                       | SW1MIC-ACTIOS-B   | Library for communication (for iOS application development) (Japanese/English version)   |

\*1: For detailed information about supported modules, refer to the manuals of the relevant software package.

\*2: The MELSOFT GX Works3 menu is switchable between Japanese, English, and simplified Chinese. (Traditional Chinese and Korean will be supported soon.)



\*3: To use MELSOFT MX Sheet, MELSOFT MX Component is required.

## Compliance with international quality assurance standards

All of Mitsubishi Electric's FA products have acquired the international quality assurance "ISO9001" and environment management system standard "ISO14001" certification. Mitsubishi Electric's products also comply with various safety standards, including UL standards.

\*For jointly developed and partner products, guaranteed quality standards may differ. Please refer to the product manuals for details.

### Safety Standards

|   |  |   |  |
|---|--|---|--|
|  | CE : Council Directive of the European Communities |  | UL : Underwriters Laboratories Listing |
|---|--|---|--|

Excel, ActiveX are registered trademarks of Microsoft Corporation in the United States and other countries.  
Ethernet is a trademark of Xerox Corporation.  
SD/SDHC logo is a trademark of SD-3C, LLC.  
MODBUS is a registered trademark of Schneider Electric USA, Inc.  
BACnet is a registered trademark of ASHRAE.  
Cognex, In-Sight, DataMan, VisionView and UltraLight are registered trademarks of Cognex Corporation.  
Hotbars is a trademark of Cognex Corporation.  
All other company names and product names used in this document are trademarks or registered trademarks of their respective companies.


### Precautions before use

This publication explains the typical features and functions of the products herein and does not provide restrictions or other information related to usage and module combinations. Before using the products, always read the product user manuals. Mitsubishi Electric will not be held liable for damage caused by factors found not to be the cause of Mitsubishi Electric; opportunity loss or lost profits caused by faults in Mitsubishi Electric products; damage, secondary damage, or accident compensation, whether foreseeable or not, caused by special factors; damage to products other than Mitsubishi Electric products; or any other duties.

### For safe use

- To use the products given in this publication properly, always read the relevant manuals before beginning operation.
- The products have been manufactured as general-purpose parts for general industries, and are not designed or manufactured to be incorporated in a device or system used in purposes related to human life.
- Before using the products for special purposes such as nuclear power, electric power, aerospace, medicine or passenger-carrying vehicles, consult with Mitsubishi Electric.
- The products have been manufactured under strict quality control. However, when installing the products where major accidents or losses could occur if the products fail, install appropriate backup or fail-safe functions in the system.

# YOUR SOLUTION PARTNER

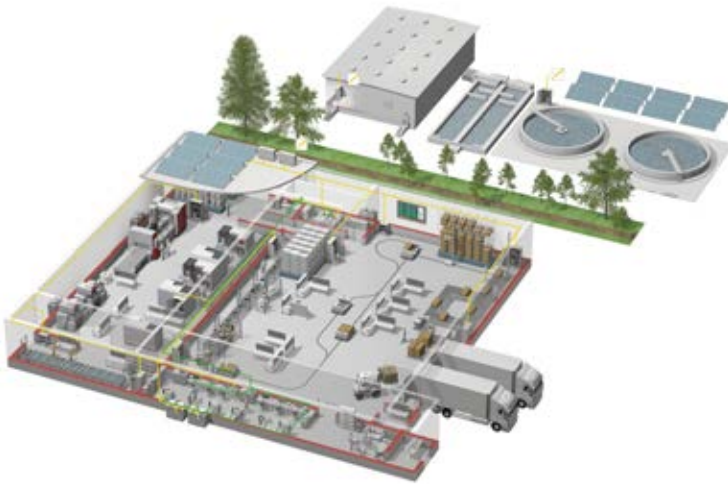

Mitsubishi Electric offers a wide range of automation equipment from PLCs and HMIs to CNC and EDM machines.

## A NAME TO TRUST

Since its beginnings in 1870, some 45 companies use the Mitsubishi name, covering a spectrum of finance, commerce and industry.

The Mitsubishi brand name is recognized around the world as a symbol of premium quality.

Mitsubishi Electric Corporation is active in space development, transportation, semi-conductors, energy systems, communications and information processing, audio visual equipment and home electronics, building and energy management and automation systems, and has 237 factories and laboratories worldwide in over 121 countries.

This is why you can rely on Mitsubishi Electric automation solution - because we know first hand about the need for reliable, efficient, easy-to-use automation and control in our own factories.

As one of the world's leading companies with a global turnover of over 4 trillion Yen (over \$40 billion), employing over 100,000 people, Mitsubishi Electric has the resource and the commitment to deliver the ultimate in service and support as well as the best products.



Low voltage: MCCB, MCB, ACB



Medium voltage: VCB, VCC



Power monitoring, energy management



Compact and Modular Controllers



Inverters, Servos and Motors



Visualisation: HMIs



Numerical Control (NC)



Robots: SCARA, Articulated arm



Processing machines: EDM, Lasers, IDS




Transformers, Air conditioning, Photovoltaic systems

\* Not all products are available in all countries.

| Country/Region | Sales office  | Tel/Fax  |
|----------------|---|--|
| USA            | MITSUBISHI ELECTRIC AUTOMATION, INC.<br>500 Corporate Woods Parkway, Vernon Hills, IL 60061, U.S.A.   | Tel : +1-847-478-2100<br>Fax : +1-847-478-2253     |
| Mexico         | MITSUBISHI ELECTRIC AUTOMATION, INC. Mexico Branch<br>Mariano Escobedo #69, Col. Zona Industrial, Tlalnepantla Edo. Mexico, C.P.54030   | Tel : +52-55-3067-7500                             |
| Brazil         | MITSUBISHI ELECTRIC DO BRASIL COMÉRCIO E SERVIÇOS LTDA.<br>Avenida Adelino Cardana, 293, 21 andar, Bethaville, Barueri SP, Brazil   | Tel : +55-11-4689-3000<br>Fax : +55-11-4689-3016   |
| Germany        | MITSUBISHI ELECTRIC EUROPE B.V. German Branch<br>Mitsubishi-Electric-Platz 1, 40882 Ratingen, Germany   | Tel : +49-2102-486-0<br>Fax : +49-2102-486-1120    |
| UK             | MITSUBISHI ELECTRIC EUROPE B.V. UK Branch<br>Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, U.K.   | Tel : +44-1707-28-8780<br>Fax : +44-1707-27-8695   |
| Ireland        | MITSUBISHI ELECTRIC EUROPE B.V. Irish Branch<br>Westgate Business Park, Ballymount, Dublin 24, Ireland  | Tel : +353-1-4198800<br>Fax : +353-1-4198890       |
| Italy          | MITSUBISHI ELECTRIC EUROPE B.V. Italian Branch<br>Centro Direzionale Colleoni-Palazzo Sirio Viale Colleoni 7, 20864 Agrate Brianza(Milano) Italy  | Tel : +39-039-60531<br>Fax : +39-039-6053-312      |
| Spain          | MITSUBISHI ELECTRIC EUROPE, B.V. Spanish Branch<br>Carretera de Rubí, 76-80-Apdo. 420, 08190 Sant Cugat del Vallés (Barcelona), Spain   | Tel : +34-935-65-3131<br>Fax : +34-935-89-1579     |
| France         | MITSUBISHI ELECTRIC EUROPE B.V. French Branch<br>25, Boulevard des Bouvets, 92741 Nanterre Cedex, France  | Tel : +33-1-55-68-55-68<br>Fax : +33-1-55-68-57-57 |
| Czech Republic | MITSUBISHI ELECTRIC EUROPE B.V. Czech Branch<br>Avenir Business Park, Radlicka 751/113e, 158 00 Praha5, Czech Republic  | Tel : +420-251-551-470<br>Fax : +420-251-551-471   |
| Poland         | MITSUBISHI ELECTRIC EUROPE B.V. Polish Branch<br>ul. Krakowska 50, 32-083 Balice, Poland  | Tel : +48-12-347-65-00<br>Fax : +48-12-630-47-01   |
| Sweden         | MITSUBISHI ELECTRIC EUROPE B.V. (Scandinavia)<br>Fjellievägen 8, SE-22736 Lund, Sweden  | Tel : +46-8-625-10-00<br>Fax : +46-46-39-70-18     |
| Russia         | MITSUBISHI ELECTRIC (RUSSIA) LLC St. Petersburg Branch<br>Piskarevsky pr. 2, bld 2, lit "Sch", BC "Benua", office 720; 195027 St. Petersburg, Russia  | Tel : +7-812-633-3497<br>Fax : +7-812-633-3499     |
| Turkey         | MITSUBISHI ELECTRIC TURKEY A.Ş Ümraniye Branch<br>Serifali Mahallesi Nutuk Sokak No:5, TR-34775 Umraniye/Istanbul, Turkey   | Tel : +90-216-526-3990<br>Fax : +90-216-526-3995   |
| UAE            | MITSUBISHI ELECTRIC EUROPE B.V. Dubai Branch<br>Dubai Silicon Oasis, P.O.BOX 341241, Dubai, U.A.E.  | Tel : +971-4-3724716<br>Fax : +971-4-3724721       |
| South Africa   | ADROIT TECHNOLOGIES<br>20 Waterford Office Park, 189 Witkoppen Road, Fourways, South Africa   | Tel : +27-11-658-8100<br>Fax : +27-11-658-8101     |
| China          | MITSUBISHI ELECTRIC AUTOMATION (CHINA) LTD.<br>No.1386 Hongqiao Road, Mitsubishi Electric Automation Center, Shanghai, China  | Tel : +86-21-2322-3030<br>Fax : +86-21-2322-3000   |
| Taiwan         | SETSUYO ENTERPRISE CO., LTD.<br>6F, No.105, Wugong 3rd Road, Wugu District, New Taipei City 24889, Taiwan   | Tel : +886-2-2299-2499<br>Fax : +886-2-2299-2509   |
| Korea          | MITSUBISHI ELECTRIC AUTOMATION KOREA CO., LTD.<br>7F-9F, Gangseo Hangang Xi-tower A, 401, Yangcheon-ro, Gangseo-Gu, Seoul 07528, Korea  | Tel : +82-2-3660-9530<br>Fax : +82-2-3664-8372     |
| Singapore      | MITSUBISHI ELECTRIC ASIA PTE. LTD.<br>307, Alexandra Road, Mitsubishi Electric Building, Singapore 159943   | Tel : +65-6473-2308<br>Fax : +65-6476-7439         |
| Thailand       | MITSUBISHI ELECTRIC FACTORY AUTOMATION (THAILAND) CO., LTD.<br>12th Floor, SV.City Building, Office Tower 1, No. 896/19 and 20 Rama 3 Road, Kwaeng Bangpongpan, Khet Yannawa, Bangkok 10120, Thailand | Tel : +66-2682-6522<br>Fax : +66-2682-6020         |
| Vietnam        | MITSUBISHI ELECTRIC VIETNAM COMPANY LIMITED Hanoi Branch<br>6th Floor, Detech Tower, 8 Ton That Thuyet Street, My Dinh 2 Ward, Nam Tu Liem District, Hanoi, Vietnam                                   | Tel : +84-4-3937-8075<br>Fax : +84-4-3937-8076     |
| Indonesia      | PT. MITSUBISHI ELECTRIC INDONESIA<br>Gedung Jaya 11th Floor, JL. MH. Thamrin No.12, Jakarta Pusat 10340, Indonesia  | Tel : +62-21-3192-6461<br>Fax : +62-21-3192-3942   |
| India          | MITSUBISHI ELECTRIC INDIA PVT. LTD. Pune Branch<br>Emerald House, EL-3, J Block, M.I.D.C., Bhosari, Pune-411026, Maharashtra, India   | Tel : +91-20-2710-2000<br>Fax : +91-20-2710-2100   |
| Australia      | MITSUBISHI ELECTRIC AUSTRALIA PTY. LTD.<br>348 Victoria Road, P.O. Box 11, Rydalmere, N.S.W 2116, Australia   | Tel : +61-2-9684-7777<br>Fax : +61-2-9684-7245     |

Mitsubishi Electric Corporation Nagoya Works is a factory certified for ISO 14001 (standards for environmental management systems) and ISO 9001 (standards for quality assurance management systems).

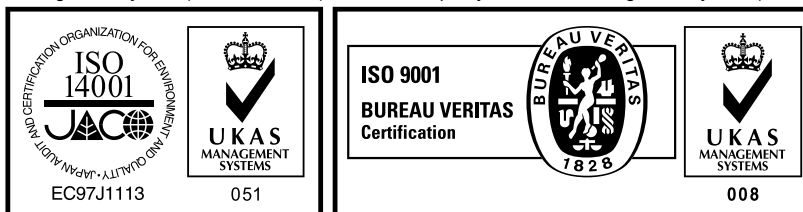

## MITSUBISHI ELECTRIC CORPORATION

HEAD OFFICE: TOKYO BLDG., 2-7-3, MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAPAN  
[www.MitsubishiElectric.com](http://www.MitsubishiElectric.com)